

## PNEUMATIC – 320 eSAFE MULTI-LINK SYSTEM

## DESCRIPTION

With multiple outlets, Series 320 eSafe Multi-Link offers both flexibility & high performance. Available in 1 to 5 outlet units. A small unit can be expanded with extensions to create a larger unit with up to five outlets. Separate units can be easily connected. Combine with CEJN polyurethane hose & FRL units to create a safe & flexible high performance air distribution system. eSafe complies with ISO Standard 4414 & EN 983 & it offers standard features; one hand operated, high flow & long service life.

FEATURES	BENEFITS
<ul style="list-style-type: none"> <li>• Compact multiple outlets</li> <li>• Outlets adjustable up to 180°</li> </ul>	<ul style="list-style-type: none"> <li>• No assembly necessary</li> <li>• Safety function to reduce noise &amp; prevent recoil accidents</li> </ul>
SPECIFICATIONS	
Nominal flow diameter	7.6 mm (5/16")
Max. working pressure	16 bar (232 psi)
Min. burst pressure	64 bar (928 psi)
Temperature range	-20°C to +100°C (-4°F to +212°F)
Material	Zinc plated steel / zinc
Media	Compressed air, neutral gas
Connection	1/2" BSPP female thread

## Single Shut-off



**MULTI-LINK**  
eSAFE SERIES 320  
BSPP FEMALE

246

PART NUMBER	THREAD	NO. OF OUTLETS
C199029200	1/2" BSPP	Extension unit
C199029201	1/2" BSPP	1
C199029202	1/2" BSPP	2
C199029203	1/2" BSPP	3
C199029204	1/2" BSPP	4
C199029205	1/2" BSPP	5

## PNEUMATIC – FEMALE ADAPTOR MULTI-LINK SYSTEM

## DESCRIPTION

With multiple outlets, female adaptor Multi-Link offers both flexibility & high performance. Available in 1 to 5 outlet units with threaded 1/2" outlets. A small unit can be expanded with extensions to create a larger unit with up to four outlets. Separate units can be easily connected. Combine with CEJN polyurethane hose & FRL units to create a flexible high performance air distribution system.

FEATURES	
<ul style="list-style-type: none"> <li>• Compact multiple outlets</li> <li>• Ready-made units, no assembly necessary</li> <li>• Outlets adjustable up to 180°</li> </ul>	
SPECIFICATIONS	
Nominal flow diameter	10 mm (7/32")
Max. working pressure	12 bar (174 psi)
Min. burst pressure	48 bar (696 psi)
Temperature range	-20°C to +100°C (-4°F to +212°F)
Material	Zinc plated steel / zinc
Media	Compressed air, neutral gas
Connection	1/2" BSPP female thread



**MULTI-LINK**  
BSPP FEMALE

246

PART NUMBER	THREAD	NO. OF OUTLETS
C199029990	1/2" BSPP	Extension unit
C199029991	1/2" BSPP	1
C199029992	1/2" BSPP	2
C199029993	1/2" BSPP	3
C199029994	1/2" BSPP	4
C199029995	1/2" BSPP	5

## SOFT-LINE COVERS &amp; ASSEMBLY TOOL

## DESCRIPTION


Soft-line covers are designed to be added onto couplings to 'soften' the edges of quick connect couplings, making them non-abrasive & less likely to cause damage to surrounding components & surfaces. Additionally, the covers also protect couplings from impact, thus prolonging their service life. The covers can be fitted on any regular series 300, 310, 315, 320, 326, 410 & 430 coupling. An assembly tool can be ordered separately.



**SOFT-LINE COVERS**  
10 PER PACK

255

PART NUMBER	FOR USE WITH
C199007001	CEJN Series 300, 310, 315, 320, 326
C199007002	CEJN Series 410, 430

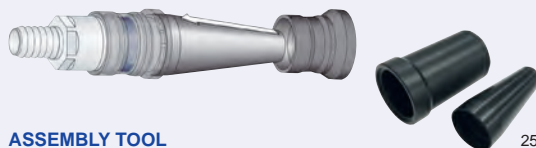

**ASSEMBLY TOOL**

255

PART NUMBER	FOR USE WITH
C199007051	CEJN Series 300, 310, 315, 320, 326
C199007053	CEJN Series 550