


DESCRIPTION	
Safety valve with adjustable spring.	
SPECIFICATIONS	
Max. working pressure	16 bar (Series FP-200M1018.A up to 18 bar)
Temperature range	-10°C to +85°C



DESCRIPTION	
Pressure relief valve with set spring. Set safety valve registering is stopped by means of fixed plastic hood. It can be removed only when it's broken.	
SPECIFICATIONS	
Max. working pressure	18 bar
Temperature range	-10°C to +85°C

PRESSURE RELIEF VALVE ADJUSTABLE MANUAL EXHAUST RING

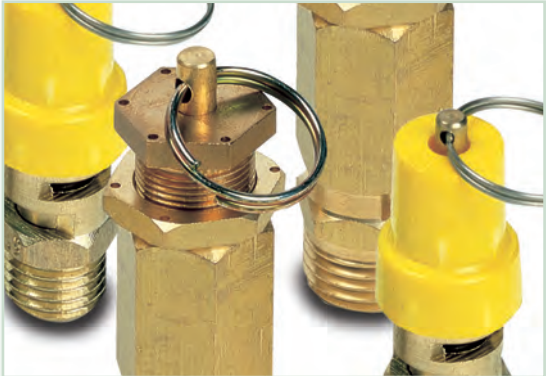

1925

PART NUMBER	THREAD	ADJUSTABLE PRESSURE
FP-200M0002.A	1/4" BSPP	0 – 2 bar
FP-200M0206.A	1/4" BSPP	2 – 6 bar
FP-200M0610.A	1/4" BSPP	6 – 10 bar
FP-200M1018.A	1/4" BSPP	10 – 18 bar
FP-221M0002A	3/8" BSPP	0 – 2 bar
FP-221M0208A	3/8" BSPP	2 – 8 bar
FP-221M0816A	3/8" BSPP	8 – 16 bar
FP-222M0002A	1/2" BSPP	0 – 2 bar
FP-222M0208A	1/2" BSPP	2 – 8 bar
FP-222M0816A	1/2" BSPP	8 – 16 bar
FP-223M0002A	3/4" BSPP	0 – 2 bar
FP-223M0208A	3/4" BSPP	2 – 8 bar
FP-223M0816A	3/4" BSPP	8 – 16 bar
FP-224M0004A	1" BSPP	0 – 4 bar
FP-224M0408A	1" BSPP	4 – 8 bar
FP-224M0816A	1" BSPP	8 – 16 bar

PRESSURE RELIEF VALVE SET PRESSURE PLASTIC HOOD, MANUAL EXHAUST RING



1925

PART NUMBER	THREAD	SET PRESSURE
FP-200C05.0A	1/4" BSPP	5.0 bar
FP-200C05.5A	1/4" BSPP	5.5 bar
FP-200C06.0A	1/4" BSPP	6.0 bar
FP-200C06.5A	1/4" BSPP	6.5 bar
FP-200C07.0A	1/4" BSPP	7.0 bar
FP-200C07.5A	1/4" BSPP	7.5 bar
FP-200C08.0A	1/4" BSPP	8.0 bar
FP-200C08.5A	1/4" BSPP	8.5 bar
FP-200C09.0A	1/4" BSPP	9.0 bar
FP-200C09.5A	1/4" BSPP	9.5 bar
FP-200C10.0A	1/4" BSPP	10.0 bar
FP-200C11.0A	1/4" BSPP	11.0 bar
FP-200C12.0A	1/4" BSPP	12.0 bar

Other set pressures available upon request



Do you know?

Products with safety benefits are indicated by a chevron at the bottom of their table

Do you also need?

PARKAIR®

Air receivers



Find it on page 920, section fifteen