

CDC One Touch 10 Bar Fittings

Features


- One touch, push-to-connect configuration allows instant tubing connection
- PC type has internal / external for ease of piping in limited spaces
- The main body of PL and PT types can swivel for ease of configuration
- Threads are Teflon™ coated or have an O-ring seal

Applications

- One-touch type pipe connection tool for air pressure piping
- Various uses depending on the user's requirements

Specifications

Suitability	Air (no other type of gas or liquid) Do not use in water applications
Working pressure	0 to 150 psi (10.3 bar)
Negative pressure	-29.5 in Hg / -750 mm Hg (-750 Torr)
Working temperature	0°C to +60°C (+32°F to +140°F)
Application tube	Polyurethane and nylon

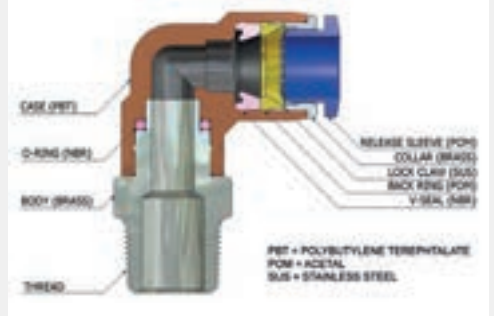

Eight

TUBE TO THREAD

STRAIGHT BSPP FEMALE



PART NUMBER	TUBE OD	THREAD	BAG QTY
CDPCF0401N	4 mm	1/8" BSPT	10
CDPCF0402N	4 mm	1/4" BSPT	10
CDPCF0403N	4 mm	3/8" BSPT	10
CDPCF0601N	6 mm	1/8" BSPT	10
CDPCF0602N	6 mm	1/4" BSPT	10
CDPCF0603N	6 mm	3/8" BSPT	10
CDPCF0801N	8 mm	1/8" BSPT	10
CDPCF0802N	8 mm	1/4" BSPT	10
CDPCF0803N	8 mm	3/8" BSPT	10
CDPCF0804N	8 mm	1/2" BSPT	10
CDPCF1001N	10 mm	1/8" BSPT	10
CDPCF1002N	10 mm	1/4" BSPT	10
CDPCF1003N	10 mm	3/8" BSPT	10
CDPCF1004N	10 mm	1/2" BSPT	10
CDPCF1202N	12 mm	1/4" BSPT	10
CDPCF1203N	12 mm	3/8" BSPT	10
CDPCF1204N	12 mm	1/2" BSPT	5

STRAIGHT BSPP FEMALE



PART NUMBER	TUBE OD	THREAD	BAG QTY
CDPCF04G01	4 mm	1/8" BSPP	10
CDPCF04G02	4 mm	1/4" BSPP	10
CDPCF04G03	4 mm	3/8" BSPP	10
CDPCF06G01	6 mm	1/8" BSPP	10
CDPCF06G02	6 mm	1/4" BSPP	10
CDPCF06G03	6 mm	3/8" BSPP	10
CDPCF08G01	8 mm	1/8" BSPP	10
CDPCF08G02	8 mm	1/4" BSPP	10
CDPCF08G03	8 mm	3/8" BSPP	10
CDPCF08G04	8 mm	1/2" BSPP	10
CDPCF10G01	10 mm	1/8" BSPP	10
CDPCF10G02	10 mm	1/4" BSPP	10
CDPCF10G03	10 mm	3/8" BSPP	10
CDPCF10G04	10 mm	1/2" BSPP	10
CDPCF12G02	12 mm	1/4" BSPP	10
CDPCF12G03	12 mm	3/8" BSPP	10
CDPCF12G04	12 mm	1/2" BSPP	5