


CDC Two Touch Fittings

Features

- The connection method is nut tightening and efficient in environments with vibration
- Made from plastics which have good tolerance to corrosion and chemicals
- Suited for low air pressure devices

Applications

- A nut tightening pipe connection tool for devices that use pneumatic piping

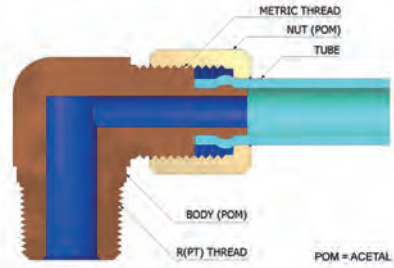

SPECIFICATIONS

Suitability	Air (no other type of gas or liquid) Do not use in water applications
Working pressure	0 to 150 psi (10.2 bar)
Negative pressure	-29.5 in Hg -750 mm Hg (-750 Torr)
Working temperature	0°C to 60°C (32°F to 140°F)
Application tube	Polyurethane tube

TUBE TO THREAD



3700

STRAIGHT BSPT MALE

PART NUMBER	TUBE OD	TUBE ID	THREAD
CDCK0601	6 mm	4.0 mm	1/8" BSPT
CDCK0602	6 mm	4.0 mm	1/4" BSPT
CDCK0801	8 mm	5.5 mm	1/8" BSPT
CDCK0802	8 mm	5.5 mm	1/4" BSPT
CDCK0803	8 mm	5.5 mm	3/8" BSPT
CDCK1002	10 mm	6.5 mm	1/4" BSPT
CDCK1003	10 mm	6.5 mm	3/8" BSPT
CDCK1202	12 mm	8.0 mm	1/4" BSPT
CDCK1203	12 mm	8.0 mm	3/8" BSPT



3700

ELBOW BSPT MALE

PART NUMBER	TUBE OD	TUBE ID	THREAD
CDGCK0601	6 mm	4.0 mm	1/8" BSPT
CDGCK0602	6 mm	4.0 mm	1/4" BSPT
CDGCK0801	8 mm	5.5 mm	1/8" BSPT
CDGCK0802	8 mm	5.5 mm	1/4" BSPT
CDGCK0803	8 mm	5.5 mm	3/8" BSPT
CDGCK1002	10 mm	6.5 mm	1/4" BSPT
CDGCK1003	10 mm	6.5 mm	3/8" BSPT
CDGCK1202	12 mm	8.0 mm	1/4" BSPT
CDGCK1203	12 mm	8.0 mm	3/8" BSPT

METRIC TUBE TO TUBE



3700

UNION TEE

PART NUMBER	TUBE OD	TUBE ID
CDFCK06	6 mm	4.0 mm
CDFCK08	8 mm	5.5 mm
CDFCK10	10 mm	6.5 mm
CDFCK12	12 mm	8.0 mm