

SILENCERS


FEATURES

- Made from corrosion resistant plastic
- Competitively priced, lightweight & durable
- Very compact, can be easily installed in limited spaces

APPLICATIONS

- Installed at exhaust ports to diminish ventilation noise

SPECIFICATIONS	1/8", 1/4", 3/8"	1/2", 3/4", 1"
Max. working pressure	100 psi (6.9 bar)	150 psi (10.2 bar)

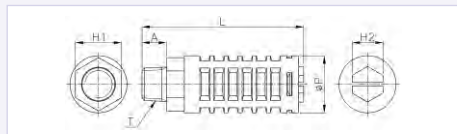

DIMENSIONS	ØP	T	L	A	H1 (Hex)	H2 (Hex)	WEIGHT g
CDST-01	10.5	R 1/8	35.3	8.0	-	6	1.9
CDST-02	22.2	R 1/4	63.0	9.5	18	12	14.1
CDST-03	25.0	R 3/8	83.2	13.7	21	15	22.2
CDST-04	30.0	R 1/2	88.0	15.5	26	19	31.1
CDST-06	45.0	R 3/4	101.0	16.8	33	-	63.7
CDST-08	45.0	R 1	103.5	16.8	33	-	65.4



**ST - PLASTIC
BSPT MALE**

PART NUMBER	OD	THREAD
CDST-01	10.5 mm	1/8" BSPT
CDST-02	22.2 mm	1/4" BSPT
CDST-03	25.0 mm	3/8" BSPT
CDST-04	30.0 mm	1/2" BSPT
CDST-06	45.0 mm	3/4" BSPT
CDST-08	45.0 mm	1" BSPT


FEATURES

- Excellent noise reduction & filtering effect in dry conditions

APPLICATIONS

- Metal filters are available for high temperature & pressure environments
- Durable against impact
- Easy to weld & used for virtually every industry

SPECIFICATIONS	M5	1/8"	1/4"	3/8"	1/2"	3/4"	1"
Flow rate	250	300	320	340	370	400	420
Max. working pressure	220 psi (15.1 bar)						
Working temperature	0°C to 80°C (32°F to 176°F)						

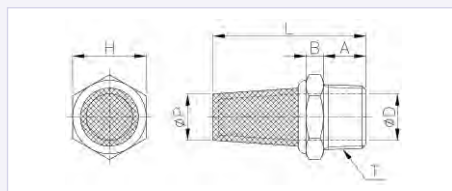

DIMENSIONS	ØP	T	L	A	H (Hex)	WEIGHT g
CDSTB-M5	7.0	M5*0.8P	18.0	4.0	7	3.0
CDSTB-01	8.0	R 1/8	23.5	6.5	11	8.0
CDSTB-02	11.5	R 1/4	33.0	8.5	16	14.0
CDSTB-03	13.0	R 3/8	38.0	9.0	19	24.0
CDSTB-04	16.0	R 1/2	43.0	12.5	22	35.0
CDSTB-06	18.0	R 3/4	52.0	15.0	28	46.0
CDSTB-08	24.0	R 1	82.0	19.0	35	128.0



**STB
SINTERED BRASS
METRIC MALE**

PART NUMBER	THREAD
CDSTB-M5	M5 x 0.8

BSPT MALE

CDSTB-01	1/8" BSPT
CDSTB-02	1/4" BSPT
CDSTB-03	3/8" BSPT
CDSTB-04	1/2" BSPT
CDSTB-06	3/4" BSPT
CDSTB-08	1" BSPT