

SPIRAL ANTI-SPARK POLYURETHANE TUBE

SUITABILITY	FEATURES / BENEFITS
<ul style="list-style-type: none"> • Welding environments • Assembly lines, fixed workplaces • Breathing air applications 	<ul style="list-style-type: none"> • Low friction • Spark & scorch resistant • Excellent resistance to oils, solvents & other non-aqueous solutions • Long service life with outstanding ageing qualities • Excellent recoil ability
SPECIFICATIONS	
Temperature range	-30°C to +60°C
Pressure rating	Values given are based on the short term burst pressure of CEJN spiral anti-spark hose at 20°C using a 3:1 safety factor. NOTE: Any increase in temperature above 20°C will result in a decline in the working pressure values.
Construction	Ester based polyurethane.
Applicable standards	EN14594:2005 when used with approved breathing air filters.



**SPIRAL ANTI-SPARK
3 3/8" MANDREL SIZE**

285


PART NUMBER				
C199584020	6.5	10	2	10
C199584040	6.5	10	4	10
C199584060	6.5	10	6	10
C199584080	6.5	10	8	10

4 1/4" MANDREL SIZE

C199584220	8.0	12	2	10
C199584240	8.0	12	4	10
C199584260	8.0	12	6	10
C199584280	8.0	12	8	10

REINFORCED ANTI-SPARK POLYURETHANE HOSE

FEATURES	
<ul style="list-style-type: none"> • Spark & scorch resistant • Excellent resistance to oils, solvents & other non-aqueous solutions • Long service life with outstanding ageing qualities • Light & flexible • High impact strength, as well as high tensile & tear strength 	
SPECIFICATIONS	
Temperature range	-30°C to +60°C
Construction	Ester based polyurethane reinforced with polyester fibre.

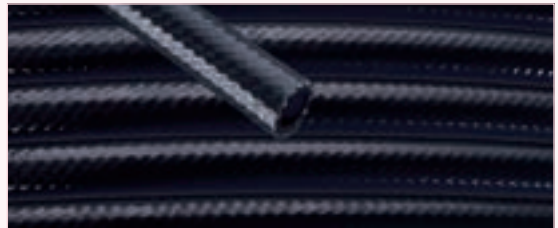

**ANTI-SPARK
50 METRE COILS**

285

PART NUMBER			
C199581230	8.0	12.0	14
C199581330	9.5	13.5	12
C199581637	11.0	16.0	12

Do you also need?



Quick connect pneumatic couplings



Find it on pages 7 – 21, section one