


SUITABILITY		FEATURES / BENEFITS	
<ul style="list-style-type: none"> Compressed air Fuel / oil Paint spray & solvent lines 		<ul style="list-style-type: none"> Resistant to a wide range of chemicals Silicone free Abrasion resistance – excellent Mirror smooth inner for improved flow A full range of colours are available 	
SPECIFICATIONS			
Temperature range	-40°C to +80°C		
Pressure rating	Burst pressure @ 20°C. NOTE: Working pressures allow a factor of between 2-1 & 4-1 subject to operating conditions.		
Construction	Manufactured from nylon (PA) 12 In accordance with BS5409		



Supplied in full coils only

PNMSF – NATURAL
30 METRE COILS

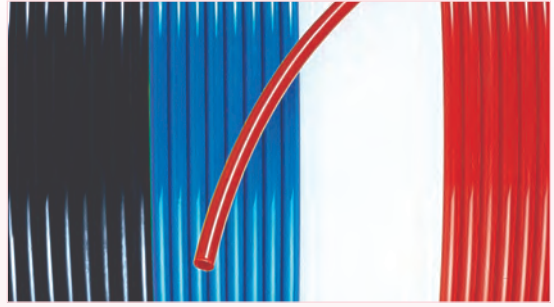

1355

PART NUMBER			
PNMSF04	4	2.5	62
PNMSF06	6	4.0	57
PNMSF08	8	5.5	55
PNMSF10	10	7.0	53
PNMSF12	12	9.0	51

PNMSF – BLUE
30 METRE COILS



1355

PART NUMBER			
PNMSF04B	4	2.5	62
PNMSF06B	6	4.0	57
PNMSF08B	8	5.5	55
PNMSF10B	10	7.0	53
PNMSF12B	12	9.0	51

PNMSF – RED
30 METRE COILS



1355

PART NUMBER			
PNMSF04R	4	2.5	62
PNMSF06R	6	4.0	57
PNMSF08R	8	5.5	55
PNMSF10R	10	7.0	53
PNMSF12R	12	9.0	51

PNMSF – BLACK
30 METRE COILS



1355

PART NUMBER			
PNMSF04BK	4	2.5	62
PNMSF06BK	6	4.0	57
PNMSF08BK	8	5.5	55
PNMSF10BK	10	7.0	53
PNMSF12BK	12	9.0	51

Do you also need?



Air preparation products



Find it on pages 303 – 310, section five

Do you also need?



Cylinders & accessories



Find it on pages 342 – 353, section six