

MINIMESS® 1620 TEST POINT ADAPTORS

GAUGE ADAPTOR

FEMALE TEST POINT TO GAUGE FEMALE



8430

PART NUMBER	THREAD	THREAD
HTP2103-07-11.62	M16 x 2	1/4" BSPP
HTP2103-07-12.62	M16 x 2	1/2" BSPP
HTP2103-07-23.62	M16 x 2	1/4" NPT

HOSE ADAPTOR WITHOUT VALVE

MALE TEST POINT THREAD



8430

PART NUMBER	THREAD
HTP2146-01-00.00	M16 x 2

BULKHEAD ADAPTOR WITH VALVE

MALE TEST POINT THREADS



8430

PART NUMBER	THREAD
HTP2103-04-16.00	M16 x 2

TEST POINT CONVERSION ADAPTOR WITHOUT VALVE

MALE / FEMALE TEST POINT THREADS



8430

PART NUMBER	MALE THREAD	FEMALE THREAD
HTP2101-07-44.62	M16 x 2.0	M12 x 1.5
HTP2102-07-44.62	M16 x 2.0	M16 x 1.5
HTPHSPF/1620M	5/8" BSF (HSP)	M16 x 2.0

BULKHEAD ADAPTOR WITHOUT VALVE

MALE TEST POINT / FEMALE GAUGE



8430

PART NUMBER	THREAD
HTP2103-05-11.00	1/4" BSPP
HTP2103-05-12.00	1/2" BSPP
HTP2103-05-23.00	1/4" NPT

PRESSURE & TEMPERATURE TEST POINT WITH VALVE

MALE THREAD - NBR SEALS



8430

PART NUMBER	THREAD	SEALING FORM
HTP2149-04-15.13	1/4" BSPP	Form F
HTP2149-04-19.13	M10 x 1.0	Form G

MICROBORE HOSE ASSEMBLIES

DESCRIPTION


The microbore hose is available in 2 mm internal diameter up to 400 bar working pressure. The hose material is extremely flexible, lightweight & can be specified for a large range of uses.

APPLICATIONS

- Oils
- Water
- Bleeding
- Gases
- Sampling
- Aggressive media
- Grease
- Permanent installations
- Pressure testing up to 630 bar

SPECIFICATIONS

Min. bend radius	20 (below -20°C 30mm)
Working temperature range	-20°C up to +100°C (-4°F to +212°F) short time up to 120°C (248°F)

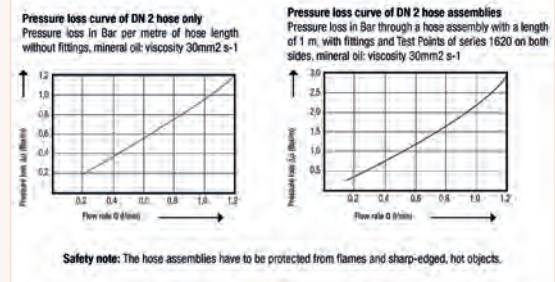

DN2 HOSE ASSEMBLY

1620 FEMALE / 1620 FEMALE



8430

PART NUMBER				
HTPS110-AC-AC-00.20	2	0.2	M16 x 2	630
HTPS110-AC-AC-00.40	2	0.4	M16 x 2	630
HTPS110-AC-AC-00.80	2	0.8	M16 x 2	630
HTPS110-AC-AC-01.00	2	1.0	M16 x 2	630
HTPS110-AC-AC-01.50	2	1.5	M16 x 2	630
HTPS110-AC-AC-02.00	2	2.0	M16 x 2	630
HTPS110-AC-AC-03.00	2	3.0	M16 x 2	630
HTPS110-AC-AC-04.00	2	4.0	M16 x 2	630
HTPS110-AC-AC-05.00	2	5.0	M16 x 2	630

DN2 HOSE ASSEMBLY

1620 FEMALE / BSPP SWIVEL GAUGE FEMALE



8430

PART NUMBER				
HTPS110-AC-FA-00.20	2	0.2	1/4	630
HTPS110-AC-FA-00.40	2	0.4	1/4	630
HTPS110-AC-FA-00.80	2	0.8	1/4	630
HTPS110-AC-FA-01.00	2	1.0	1/4	630
HTPS110-AC-FA-01.50	2	1.5	1/4	630
HTPS110-AC-FA-02.00	2	2.0	1/4	630
HTPS110-AC-FA-03.00	2	3.0	1/4	630
HTPS110-AC-FA-04.00	2	4.0	1/4	630
HTPS110-AC-FA-05.00	2	5.0	1/4	630