

FEATURES

The 3 veins give the pump the ability to deliver media with a lift up to 6.1 m (20 ft).

- Delivers media with a head / lift up to 6.1 m (20 ft)
- Delivers 38 l/min (10 g/min)
- 8 ft antistatic discharge hose with flame arrestor & vacuum breaker
- Suitable for gasoline, diesel & kerosene



4005

INDUSTRIAL ROTARY FUEL PUMP

PART NUMBER	DESCRIPTION
GR-ZRBP3V	Industrial rotary fuel pump

FEATURES

- 2 m / 6.5 ft suction hose with filter
- 4 m / 13 ft delivery hose with aluminium manual nozzle
- 2 m / 6.5 ft long battery cable with crocodile clips
- Self priming diesel transfer pump
- Bypass valve built into pump casing
- Waterproof to IP55
- Flow rate – 40 l/min (10 GPM)
- Duty cycle – 30 mins on / 30 mins off



4005

FUEL TRANSFER PUMP KIT

PART NUMBER	DESCRIPTION
GR-J10304022	12 V
GR-J10304024	24 V

FEATURES

- Stainless steel, automatic nozzle, suitable for use with AdBlue pumps
- Automatically shuts off flow when the vehicle tank is full
- Heavy duty, stainless steel (SS304) cast body with polyamide cover
- Built-in stainless steel swivel for ease of use

SPECIFICATIONS

Flow rate	45 l/min
Working temperature range	10°C to 50°C
Max working pressure	50 psi
Inlet	3/4" hose barb



4005

3/4" ADBLUE NOZZLE – AUTOMATIC SHUT-OFF STAINLESS STEEL

PART NUMBER	DESCRIPTION
GR-ZFCNASSS34	3/4" stainless steel AdBlue nozzle

FEATURES

For use with DEF, AdBlue, urea, windshield fluids & other water based media.

- Nylon construction with stainless steel internal parts & FKM seal
- Nozzle spout with notches to stop the gun from slipping from the tank during delivery
- Manual control
- Includes continuous flow switch for unattended dispensing
- Designed for minimal back pressure & reduction in flow

SPECIFICATIONS

Flow rate	90 l/min
Working temperature range	Up to 60°C
Max working pressure	5 bar
Inlet	3/4" hose barb



4005

3/4" ADBLUE NOZZLE – MANUAL

PART NUMBER	DESCRIPTION
GR-ZABN34	3/4" AdBlue nozzle

FEATURES

Lever action barrel pump for AdBlue, antifreeze, detergents, pesticides & high viscosity oils. Supplied with suction tube & 2 m discharge hose. Pump outlet is fitted with an air vent cap, which when loosened, breaks the siphon action. Supplied complete with suction tube for use with 50 – 205 litre drums & 2 m 3/4" flexible corrugated discharge hose.

Do not use with: Any media not compatible with materials used in the pump construction. These pumps must not be used for fuel transfer or with solvent thinners, etc.




4005

LEVER ADBLUE PUMP

PART NUMBER	DESCRIPTION
GR-ZPLP02	Lever AdBlue pump

FEATURES

- Pump complete with control nozzle, telescopic suction tube & 1.5 m flexible hose
- 2900 mAh rechargeable lithium-ion battery rechargeable via USB 2.0 type B connector (USB cable included)
- Charge time: 3 hrs
- Flow rate: up to 11.5 l/min
- Duty cycle: maximum 15 mins on & 30 mins off
- Fully charged battery can discharge up to 300 litres (tested using water)
- Wetted components: polypropylene, polyethylene, PVC & acetal
- Recommended use: gasoline, diesel, kerosene, light oils, AdBlue, DEF, water, antifreeze, windscreen fluid, mild detergents & agricultural chemicals
- Do not use with: acids, acetone, benzene, cresol, ethyl, phenol, methyl ethyl, thinners, solvents, etc

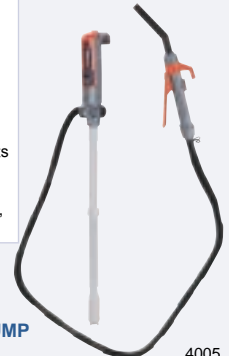

4005

RECHARGEABLE DEF / ADBLUE PUMP BATTERY OPERATED

PART NUMBER	DESCRIPTION
GR-ZBOP60	Flow rate up to 11.5 l/min