




209 air and fluid guns

Designed for workplace ergonomics

PNEUMATICS

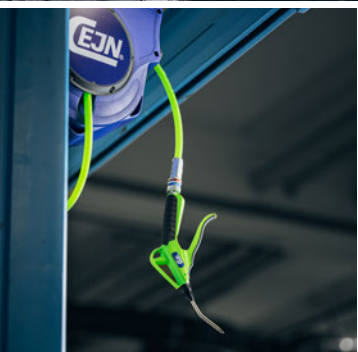

Setting the new standard for professional air and fluid guns

The 209 air and fluid guns are built on the success of its predecessor, possessing the same great benefits that have defined the landscape for professional blow guns: high blowing force, lightweight, ergonomic, robust design and high precision flow control.

The new generation blowguns have an integrated soft grip both on the handle and the trigger, giving the user a steady and comfortable grip for overall improved ergonomics. The 209 is available in the classic blue color (standard gun) or in a hi-vis execution to provide increased visibility. As standard, the hi-vis version is equipped with OSHA-compliant safety nozzles.

TECHNICAL DATA

Max. working pressure	16 bar (232 PSI)
Min. burst pressure	64 bar (928 PSI)
Material	POM (body), TPE (soft grip), brass (tube)
Media	Air and non-explosive water based liquids
Available options	Hi-vis design, safety nozzles
Features	High flow design, removable nozzles, ergonomic soft grip

Flow capacity is measured at 6 bar (87 PSI) inlet pressure, and pressure drop at 0.5 bar (7 PSI).

This is the 209 air and fluid gun:





A nozzle and blow gun for every need

To our blow guns, there is a wide range of nozzles available. We always recommend using safety nozzles, but a large selection of specialized nozzles are available that provide specific benefits in certain situations. To stay safe while working with compressed air and fluid guns, always make sure you use a suitable nozzle together with a high-quality blow gun for the work you are performing.



BRUSH NOZZLE




FLAT NOZZLE



SILENCER



RUBBER TIP



STAR TIP NOZZLE



BYPASS NOZZLE



VENTURI NOZZLE







AIR CURTAIN NOZZLE



CHIP SHIELD NOZZLE






209 air and fluid standard guns

		Part No.	Tube	Connection	Weight	Sound level	Flow capacity	Max working pressure
	BASIC BLOW GUN BODY	11 209 0001		Rc 1/4"	104 g (3.7 oz)	106 dB	1035 l/min (36.5 CFM)	16 bar (232 PSI)
		11 209 0051		NPT 1/4"	104 g (3.7 oz)	106 dB	1035 l/min (36.5 CFM)	16 bar (232 PSI)
	90 MM TUBE	11 209 0200	Removable tube	Rc 1/4"	126 g (4.4 oz)	96 dB	528 l/min (18.6 CFM)	16 bar (232 PSI)
		11 209 0250	Removable tube	NPT 1/4"	126 g (4.4 oz)	96 dB	528 l/min (18.6 CFM)	16 bar (232 PSI)
	90 MM TUBE WITH STAR-TIP	11 209 3200	Removable tube	Rc 1/4"	127 g (4.5 oz)	82 dB	208 l/min (7.3 CFM)	16 bar (232 PSI)
		11 209 3250	Removable tube	NPT 1/4"	127 g (4.5 oz)	82 dB	208 l/min (7.3 CFM)	16 bar (232 PSI)
	REGULATOR	11 209 0301	Removable tube	Rc 1/4"	141 g (5.0 oz)	87 dB	232 l/min (8.1 CFM)	8 bar (116 PSI)
		11 209 0351	Removable tube	NPT 1/4"	141 g (5.0 oz)	87 dB	232 l/min (8.1 CFM)	8 bar (116 PSI)

CEJN reserves the right to make changes without further notification. Thread connections are listed according to ISO Standards. Other connections and sealing material on request. Check with an authorized CEJN distributor for availability and prices. Some part numbers may be subject to minimum order quantities. Please visit our website, www.cejn.com, for general maintenance tips. All measurements are in mm.

209 air and fluid hi-vis guns

		Part No.	Tube	Connection	Weight	Sound level	Flow capacity	Max working pressure
	BASIC BLOW GUN BODY	11 209 0000		Rc 1/4"	104 g (3.7 oz)	106 dB	1035 l/min (36.5 CFM)	16 bar (232 PSI)
		11 209 0050		NPT 1/4"	104 g (3.7 oz)	106 dB	1035 l/min (36.5 CFM)	16 bar (232 PSI)
	90 MM TUBE WITH STAR-TIP	11 209 3100	Removable tube	Rc 1/4"	127 g (4.5 oz)	82 dB	208 l/min (7.3 CFM)	16 bar (232 PSI)
		11 209 3150	Removable tube	NPT 1/4"	127 g (4.5 oz)	82 dB	208 l/min (7.3 CFM)	16 bar (232 PSI)
	REGULATOR	11 209 0300	Removable tube	Rc 1/4"	141 g (5.0 oz)	87 dB	232 l/min (8.1 CFM)	8 bar (116 PSI)
		11 209 0350	Removable tube	NPT 1/4"	141 g (5.0 oz)	87 dB	232 l/min (8.1 CFM)	8 bar (116 PSI)

CEJN reserves the right to make changes without further notification. Thread connections are listed according to ISO Standards. Other connections and sealing material on request. Check with an authorized CEJN distributor for availability and prices. Some part numbers may be subject to minimum order quantities. Please visit our website, www.cejn.com, for general maintenance tips. All measurements are in mm.

Made in Sweden since 1955

We have been producing professional, high-quality and innovative quick connect couplings here at CEJN since our first patented coupling was launched in 1955. CEJN is an independent global niche company with its head office in the heart of Sweden. Over the years we have expanded to 22 locations worldwide and are supplying products and services to virtually every industry segment. At CEJN, we are united by our five core values: safety, environment, quality, innovation and performance. They are our cornerstones and define who we are, how we work, what we believe in and what we stand for.

Contact your local sales office or visit www.cejn.com for more information.