

Service Valve With Tap Connector

One piece service valve and tap connector ideal for connection to fixtures or appliances

Overview

Speedfit push-fit chrome plated service valve with tap connector for connecting fixtures to pipework. Using a tamperproof 1/4 turn screwdriver slot, the valve enables the flow of water to a fixture to be isolated in the event of an emergency or for maintenance work. Simply push the valve fully onto the pipe and hand-tighten the nut on to a side entry tap, toilet or male thread. To demount the push-fit connection end, push the collet towards the body of the fitting and pull the pipe release.

The fitting is quicker and easier to install in confined spaces than traditional methods as it eliminates the need for hot works or tools.

Designed, manufactured and assembled in the UK.

Features & Benefits

- Push-fit service valve and hand-tighten tap connector
- Durable brass chrome plated body
- 1/4 turn isolation screwdriver slot
- Safe flame-free installation, with no hot works, glue or flux
- Grip & Seal collet with stainless steel teeth and main O-Ring seal
- Suitable for use with JG Speedfit PEX and polybutylene barrier pipe (inserts required) and copper pipe
- Suitable for hot and cold water use only (6 Bar @ 65°C)

Product code	Description	Size	Bag QTY
15PTSV	Service Valve With Tap Connector	15mm x 1/2" BSP	1
22PTSV	Service Valve With Tap Connector	22mm x 3/4" BSP	1



Working parameters & specifications

Application	Usual working temperature °C	Maximum working temperature °C	Maximum working pressure, bar
Cold Water (indirect and direct mains)	20	20	12
Hot Water (including unvented cylinders)	65	95	6

Materials

Body	Chrome Plated Brass (CW614N)
O-Ring	Ethylene Polypropylene Diene Monomer (EPDM)
Collet	Acetal Copolymer (Unfilled) Grey, Stainless Steel
Sealing Washers	Ethylene Polypropylene Diene Monomer (EPDM)
Actuating Ball	Chrome Plated Brass (CW614N)
Handle	Polyacrylamide (Glass Filled) Dark Grey
Handle Cover (Blue)	Polyacrylamide (Glass Filled) Blue
Handle Cover (Red)	Polyacrylamide (Glass Filled) Red
Screw & Washer	Stainless Steel (M6 X 6mm Pozidrive Pan Head Screw)

Dimensions – All measurements in mm unless otherwise stated

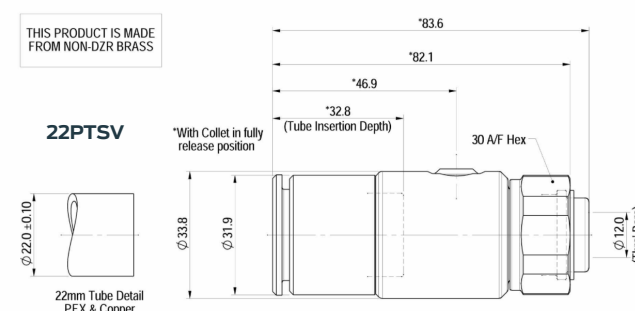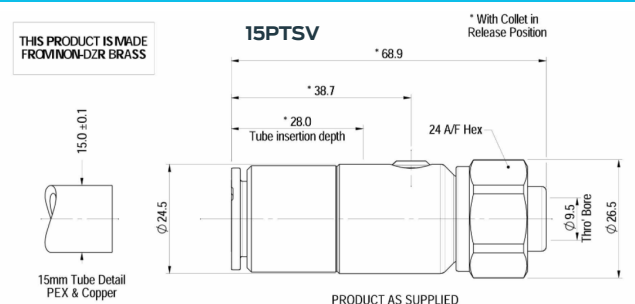

50 year guarantee when used with JG Speedfit Layflat PB and PEX Barrier Pipes