
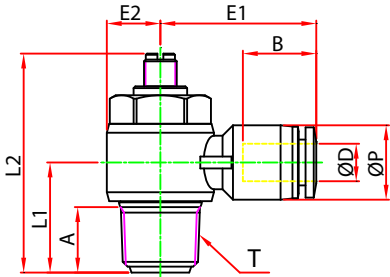


NSC-D (hybr)



MODEL	ØD	ØP	T	L1	L2		E1	E2	A	B	H (Hex)	WEIGHT (g)	BOX(EA)
					MIN	MAX							
NSC 1/4-M5(D)	1/4	13.0	M5*0.8p	10.6	20.4	22.9	23.7	5.0	3.6	16.8	8	10.7	50
NSC 1/4-01(D)			R 1/8	15.2	26.7	31.2	24.9	7.1	8.2		11	17.7	50
NSC 1/4-02(D)			R 1/4	18.4	31.3	37.4	26.8	9.1	11.0		15	31.7	50
NSC 5/16-01(D)	5/16	14.5	R 1/8	16.2	26.7	31.2	26.0	7.0	8.2	18.4	11	18.7	50
NSC 5/16-02(D)			R 1/4	19.2	31.3	37.4	28.0	9.0	11.0		15	33.7	50
NSC 5/16-03(D)			R 3/8	21.9	37.0	42.9	29.0	11.0	12.2		19	58.7	25
NSC 3/8-02(D)	3/8	17.5	R 1/4	20.7	31.3	37.4	31.0	9.1	11.0	19.6	15	35.2	25
NSC 3/8-03(D)			R 3/8	22.6	37.0	42.9	30.8	11.3	12.2		19	59.2	25