


NSS-G-DC

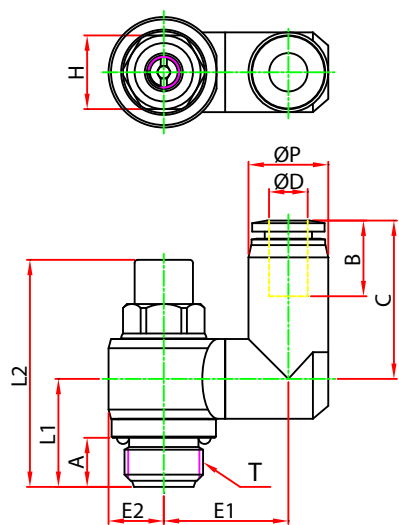

MODEL	ØD	ØP	T	L1	L2	E1	E2	A	B	H (Hex)	C	WEIGHT (g)	BOX(EA)
NSS 04-G01(DC)	4	10.5	G 1/8	15.3	31.5	14.3	7.0	6.0	14.8	8	20.3	16.0	50
NSS 04-G02(DC)			G 1/4	17.7	37.0	17.8	9.2	8.0		12	20.2	35.0	50
NSS 06-G01(DC)	6	12.5	G 1/8	14.7	31.5	15.0	7.0	6.0	16.4	8	24.0	18.0	25
NSS 06-G02(DC)			G 1/4	17.6	37.0	20.3	9.2	8.0		12	25.9	33.0	25
NSS 06-G03(DC)			G 3/8	21.4	43.6	23.3	11.5	8.0		14	25.9	63.0	25
NSS 08-G01(DC)	8	14.8	G 1/8	14.7	31.5	16.2	7.0	6.0	18.3	8	24.9	20.0	25
NSS 08-G02(DC)			G 1/4	17.6	37.0	19.3	9.2	8.0		12	28.3	34.0	25
NSS 08-G03(DC)			G 3/8	20.8	43.6	24.6	11.5	8.0		14	29.3	64.0	25
NSS 08-G04(DC)			G 1/2	23.0	50.0	26.6	14.3	9.0		17	29.3	100.0	20
NSS 10-G02(DC)	10	17.5	G 1/4	17.6	37.0	20.3	9.2	8.0	20.2	12	30.7	38.0	20
NSS 10-G03(DC)			G 3/8	20.8	43.6	24.6	11.5	8.0		14	31.7	63.0	20
NSS 10-G04(DC)			G 1/2	22.9	50.0	26.7	14.3	9.0		17	33.1	103.0	12
NSS 12-G02(DC)	12	20.5	G 1/4	17.6	37.0	21.8	9.2	8.0	22.9	12	33.4	42.0	12
NSS 12-G03(DC)			G 3/8	20.8	43.6	24.6	11.5	8.0		14	34.4	65.0	12
NSS 12-G04(DC)			G 1/2	22.9	50.0	26.7	14.3	9.0		17	35.8	104.0	12