


NSS-G-D

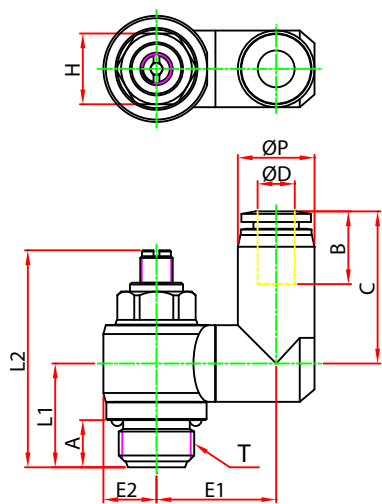

MODEL	ØD	ØP	T	L1	L2		E1	E2	A	B	H (Hex)	C	WEIGHT (g)	BOX(EA)
					MIN	MAX								
NSS 04-G01(D)	4	10.5	G 1/8	15.3	26.7	31.3	14.3	7.0	6.0	14.8	8	20.3	20.0	50
NSS 04-G02(D)			G 1/4	17.7	31.3	36.8	17.8	9.2	8.0		12	20.2	34.0	50
NSS 06-G01(D)	6	12.5	G 1/8	14.7	26.7	31.3	15.0	7.0	6.0	16.4	8	24.0	20.0	25
NSS 06-G02(D)			G 1/4	17.6	31.3	36.8	20.3	9.2	8.0		12	25.9	36.0	25
NSS 06-G03(D)			G 3/8	21.4	37.0	43.1	23.3	11.5	8.0		14	25.9	68.0	25
NSS 08-G01(D)	8	14.8	G 1/8	14.7	26.7	31.3	16.2	7.0	6.0	18.3	8	24.9	22.0	25
NSS 08-G02(D)			G 1/4	17.6	31.3	36.8	19.3	9.2	8.0		12	28.3	37.0	25
NSS 08-G03(D)			G 3/8	20.8	37.0	43.1	24.6	11.5	8.0		14	29.3	69.0	25
NSS 08-G04(D)			G 1/2	23.0	43.0	49.2	26.6	14.3	9.0		17	29.3	104.0	20
NSS 10-G02(D)	10	17.5	G 1/4	17.6	31.3	36.8	20.3	9.2	8.0	20.2	12	30.7	41.0	20
NSS 10-G03(D)			G 3/8	20.8	37.0	43.1	24.6	11.5	8.0		14	31.7	71.0	20
NSS 10-G04(D)			G 1/2	22.9	43.0	49.2	26.7	14.3	9.0		17	33.1	106.0	12
NSS 12-G02(D)	12	20.5	G 1/4	17.6	31.3	36.8	21.8	9.2	8.0	22.9	12	33.4	43.0	12
NSS 12-G03(D)			G 3/8	20.8	37.0	43.1	24.6	11.5	8.0		14	34.4	71.0	12
NSS 12-G04(D)			G 1/2	22.9	43.0	49.2	26.7	14.3	9.0		17	35.8	108.0	12