

EcoReg®

THE NEW PRESET WATER REGULATOR



EcoReg®

The pressure regulator ensures a constant and precise outlet pressure independent from the inlet pressure. The pressure value has been factory preset and cannot be changed. This ensures that no one can manipulate the specified pressure value.

The choice of high quality materials allows the EcoReg® to be used in various applications across different industries. Be it in water dispensers, in different irrigation systems or in respiratory oxygen machines. The EcoReg® with its preset pressure will prevent unwanted pressure manipulation and protect the machines or help reduce wastage of water.

Your advantages

- ✓ NSF certified
- ✓ Factory preset pressure
- ✓ Reduces consumption
- ✓ Reliability
- ✓ Service free - no adjustments needed
- ✓ Competitively priced
- ✓ Tamper proof
- ✓ Lightweight – compact, inline construction
- ✓ Easy to mount in any water supply systems
- ✓ Extension with sprinkler equipment





Technical data

| | |
|---------------------------|--|
| Max. inlet pressure: | 10 bar / 145 psi |
| Outlet pressure (preset): | 2...8 bar / 30...120psi |
| Flow (Water): | 7 l /min / 0.25 scfm |
| Connection: | 1/4" BSP (female/female) 1/4" NPT (female/female) |
| Temperature range: | 4°C to 60°C / 39°F to 140°F |
| Weight: | ca. 40g / 0.11 oz |

Applications

| | |
|-----------------------|--------------------|
| Water dispensers | Vending machines |
| Coffee machines | Steamers |
| Cooking ovens | Irrigation systems |
| Fridges & ice makers | Sprinklers |
| Plumbing | Misting |
| Respiratory equipment | |

Special
Oxygen,
and further
request

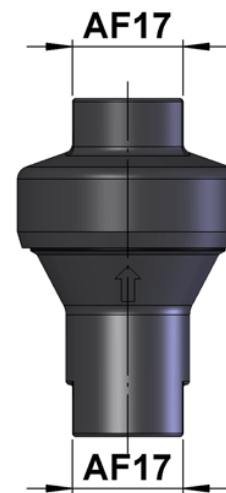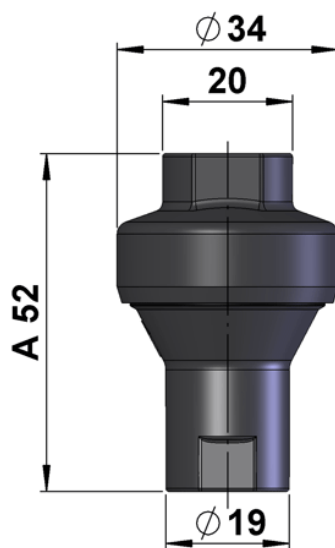

Versions:
Nitrogen
upon



TRI-MATIC AG
Bösch 82
CH-6331 Hünenberg

Phone +41 (0)41 780 22 22
Email: info@tri-matic.ch



a brand of tri-matic