

BLOW GUN

COMPRESSED AIR

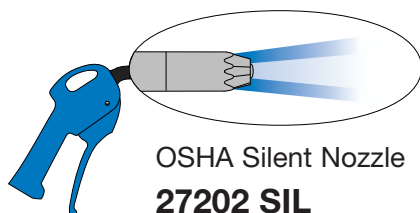
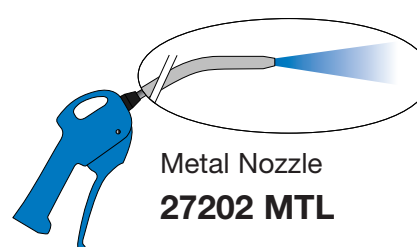
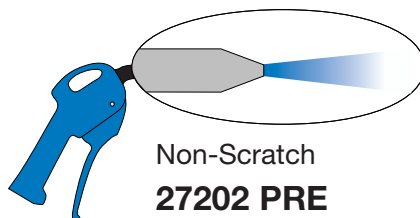
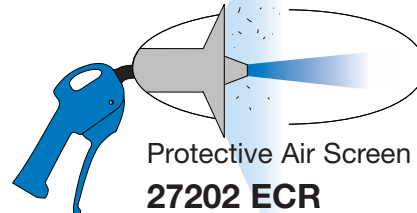
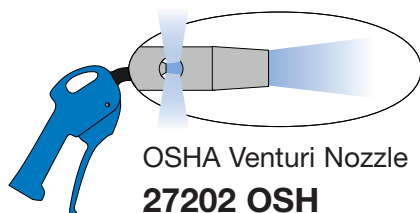
27202



27202 ERGONOMIC BLOW GUNS




High performance blow guns for compressed air applications



APPLICATIONS

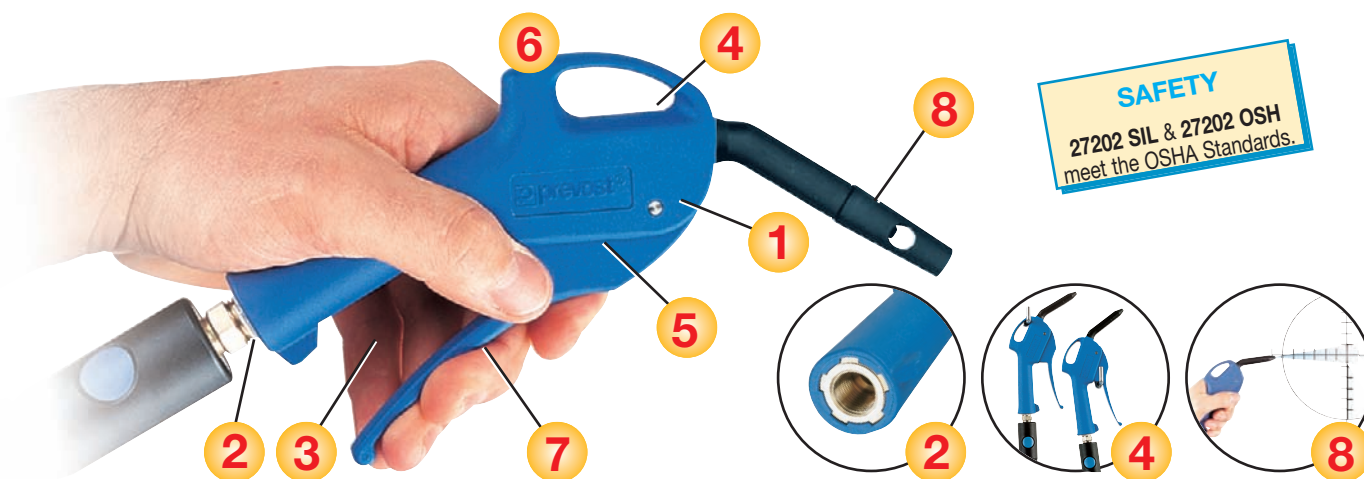- Blowing
- Expelling
- Cleaning
- Dusting
- Drying
- Air or Water Use



1 INOVATIVE NON SCRATCH

The composite material of the body and nozzle ensures that you can use the blow gun without damaging fragile surfaces.

2 STURDY

Composite high-tech material. Inlet fitting with brass insert.

3 ERGONOMIC

The thermal insulated, non-slip body of the blow gun fits confortably in your hand for effortless use.

4 EASY TO HANG UP

Two safe, practical storage options.

5 PROTECTED MECHANISM

The shape of the blow gun, with no sharp corners, keeps dust and chips from being deposited on the body and trigger. Due to its design the 27202 is protected against outside elements.

6 LIGHT WEIGHT

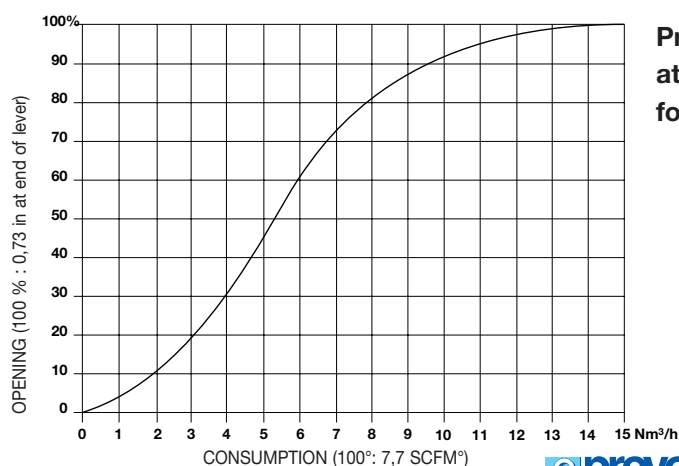
The 27202 weighs only 4.8 ozs. The light weight and long operating lever allow for effortless use.

7 PROGRESSIVE FLOW

The progressive trigger action enables precise adjustments of the air flow rate.

8 DIRECTIONAL BLOWING

Nozzle angle and natural orientation of the air flow ensures precise work.



**Pneumatic flow rate
at 87 PSI
for 27202 PRE**

Technical characteristics

Max. pressure: 145 PSI
Operating temperature: 5° F to 150° F
Thread: 1/4" FNPT
Weight: 4.8 ozs
Fluid: air



SAFETY BLOW GUNS



**PROGRESSIVE
FLOW**



MATERIAL
Composite
high-tech



HEAVY DUTY



LIGHT WEIGHT



NON-SCRATCH
Nozzle
blow guns



PRESSURE
145 PSI



TEMPERATURE
5° F to 158° F













BRASS INSERT
1/4" FNPT



FLUID
Air



PACKAGE QTY
5

		A	B	C	D	SPECIFICATIONS	PART #
		mm	mm	mm	mm	OSHA venturi nozzle	
		170				OSHA SAFETY Thread 1/4" FNPT Consumption @ 87 PSI 7.7 SCFM Sound pressure level 90 dB Blower force @ 87 PSI 9.5 Oz Dynamic pressure @ 87 PSI @ .4" 17.40 PSI	27202 OSH
		157				OSHA SAFETY Thread 1/4" FNPT Consumption @ 87 PSI 6.8 SCFM Sound pressure level 77 dB Blower force @ 87 PSI 7.5 Oz Dynamic pressure @ 87 PSI @ .4" 0 PSI	27202 SIL
		165				Thread 1/4" FNPT Consumption @ 87 PSI 13.8 SCFM Sound pressure level 82 dB Blower force @ 87 PSI 8 Oz Dynamic pressure @ 87 PSI @ .4" 36.25 PSI	27202 ECR
		160				Non-scratch nozzle Thread 1/4" FNPT Consumption @ 87 PSI 7.7 SCFM Sound pressure level 84 dB Blower force @ 87 PSI 11 Oz Dynamic pressure @ 87 PSI @ .4" 29 PSI	27202 PRE
	     	200 215 430 605 430 605				Metal tip blow gun Thread 1/4" FNPT Consumption @ 87 PSI 13.5 SCFM Sound pressure level 83 dB Blower force @ 87 PSI 13 Oz Dynamic pressure @ 87 PSI @ .4" 18 PSI Metal tip blow gun with non-scratch nozzle Bent - 13" 27202 MB13 Bent - 20" 27202 MB20 Straight - 13" 27202 MS13 Straight - 20" 27202 MS20	27202 MTL 27202 MTL RT 27202 MB13 27202 MB20 27202 MS13 27202 MS20



BLOW GUNS 27202 OSH BLISTER PACKS

OSHA

PRESENTATION Blister pack	ATTRACTIVE	COST-EFFECTIVE	READY TO USE	AIRTIGHT Sealed	WITH BLOW GUN 27202 OSH	DIAMETER 1/4"	PRESSURE 117 PSI	PACKAGE QTY 1

	 WITH ADAPTOR	 WITH COUPLING	 WITH JOINER	 WITH PUR SPIRAL HOSE	 COUPLING PROFILE	PART #
Blow gun blister packs with standard quick coupler						
	URP 066251	URC 061201	PON 38251			KB 22U
	IRP 066251	IRC 061201	PON 38251			KB 22I
	ERP 066251	ERC 061201	PON 38251			KB 22E
	ARP 066251	ARC 061201	PON 38251			KB 22A
Blow gun blister packs with standard quick coupler and spiral hose						
	URP 066201 URP 066251	URC 061201		PUS 52		KBSH 32U
	IRP 066201 IRP 066251	IRC 061201		PUS 52		KBSH 32I
	ERP 076201 ERP 076251	ERC 071201		PUS 52		KBSH 32E
	ARP 066201 ARP 066251	ARC 061201		PUS 52		KBSH 32A



BLOW GUNS KIT (spiral hose and blow gun)

PRESENTATION Blister pack	ATTRACTIVE	COST-EFFECTIVE	READY TO USE	AIRTIGHT Sealed	WITH BLOW GUN 27202 OSH	DIAMETER 1/4"	PRESSURE 117 PSI	PACKAGE QTY 1

	 INT. DIAM.	 THREAD	 LENGTH	 WITH SPIRAL HOSE	PART #
Spiral hose blow gun kit					
	1/4"	1/4" MNPT	6.5"	PUS 52	KBSH 322
	1/4"	1/4" MNPT	13"	PUS 54	KBSH 324

METAL BLOW GUN

COMPRESSED AIR

blow guns



METAL BLOW GUNS



A range suited to your needs

ST series Light weight pocket blow guns with adjustable flow

VENT'AIR Pistol grip blow gun with versatile selection of nozzles.



POCKET BLOW GUN



FLOW RATE
8.8 CFM



PRESSURE RATING
146 PSI



LIGHT WEIGHT
0.802 oz



MATERIAL
Aluminum



CORROSION RESISTANT



AVAILABLE IN ALL POPULAR PROFILES




PACKAGE QTY
10

		A	B	C	D	DESCRIPTION	PART #
		mm	mm	mm	mm	Pocket blow gun	
		115				Industrial interchange	STI
		115				Truflate profile	STU
		115				ARO 210	STA
		115				European high flow profile	STE



VENT'AIR BLOW GUN



MATERIAL
Aluminium body
Metal trigger



MATERIAL
Brass valve
Stainless steel spring




ERGONOMIC



**IMPACT
RESISTANT**



**LIGHT
WEIGHT**



FLOW RATE
@ 90 PSI:
11 SCFM



THREAD
1/4" FNPT
inlet



TEMPERATURE
14° F to 176° F



PACKAGE QTY
1

		A	B	C	D	DESCRIPTION	PART #
		mm	mm	mm	mm	Blow gun with short nozzle	
		136				Metal blow gun Short replacement nozzle (14 x 100 mm thread)	27204 27204 BUSE1
						Blow gun with medium nozzle (150 mm)	
		266				Metal blow gun Medium replacement nozzle (14 x 100 mm thread)	27205 27205 BUSE1
						Blow gun with long nozzle (300 mm)	
		416				Metal blow gun Long replacement nozzle (14 x 100 mm thread)	27206 27206 BUSE1
						Versatile nozzle for Vent'air blow gun: 27205 & 27206	
		54	14			Venturi nozzle (OSHA)	AVB 101
		39	13			Safety nozzle (OSHA)	AVB 102
		31	25			Safety nozzle with air shield	AVB 103
		31				Non-scratch nozzle	AVB 104
		40				Silent nozzle (OSHA)	AVB 105
		54	14	3100		3 mm vacuum nozzle with filter	AVB 106