

BAND-IT®

ENGINEERED FASTENING SOLUTIONS

2024 PRODUCT CATALOG

BAND-IT'S INDUSTRIAL APPLICATIONS

STAINLESS STEEL FASTENING AND BANDING

**HOSE CLAMPING
& IDENTIFICATION**



CABLE MANAGEMENT



INFRASTRUCTURE



www.band-it-idex.com

ESSENTIALLY EVERYWHERE

BAND-IT® is an innovative clamping solutions company providing service and value second to none!



Founded in Denver, Colorado in 1937, BAND-IT® is acknowledged as the world leader in quality engineered fastening solutions. A unit of IDEX corporation, BAND-IT® has an international network of representatives and distributors, with manufacturing and distribution facilities serving users worldwide.



Certificates

As demonstration of our ongoing commitment to excellence, quality and environmental management, BAND-IT is proud to display the following certificates of compliance to the prestigious International Standards:

- ISO 9001
- ISO 14001
- ISO/TS16949

Since becoming ISO/TS certified, BAND-IT® continues to seek new and innovative ways to manufacture products through our continuous efforts upgrading equipment, employee training and internal quality assurance in our quest to deliver the best products within the market place to our customers.

Patents:

6,014,792 - Ultra-Lok® band clamp including separately attached buckle

- 6,260,704 B - Band tote assembly
- 6,481,467 - Pneumatic Automatic Air Tool S350
- 7,650,680 - Improved dimple locking method for bundling objects
- 7,484,274 - Free end band and seal
- 8,146,212 - Free end band

Trademarks:

BAND-IT®, BAND-IT Jr.®, Junior®, BAND-FAST®, COLOR-IT®, Tie-Lok®, Tie-Lok Tool®, and Ultra-Lok® are registered trademarks owned by BAND-IT IDEX, Inc., a unit of IDEX Corporation.

World Headquarters

North American Operations
BAND-IT IDEX, Inc.
Western Hemisphere Sales
and Marketing
Tel: (303) 320-4555
Toll Free: 800-525-0758
Fax: (303) 333-6549
Email: info.BAND-IT@idexcorp.com
Website: www.band-it-idex.com

European Operations

BAND-IT Company Limited
Tel: (44) 1246-477333
UK Sales Tel: (44) 1246-479479
European Sales Tel: (44) 1246-479480
Fax (44) 1246-476324
Sales Email: BAND-ITUKSALES.BAND-IT@idexcorp.com
Email: EUROPEinfo.BAND-IT@idexcorp.com
Website: www.band-it-idex.com

Singapore Sales Office

BAND-IT Asia Pacific Pte. LTD.
Tel: (65) 6684-7312 / (65) 6684-7317
Fax: (65) 6795-8070
Email: PACIFICRIMinfo.BAND-IT@idexcorp.com

Latin American Sales Office

Tel: (720)-503-5882
Email: LAinfo.BAND-IT@idexcorp.com
Japan Sales Office
Tel: +81(0)70-8814-5948
Email: BID.Japaninfo.BAND-IT@idexcorp.com

China Suzhou Operations

Tel: (86) 512 6283-3000
Fax: (86) 512 6283-3928
Email: BIDChina.BAND-IT@idexcorp.com
Website
www.band-it.com.cn

TABLE OF CONTENTS



Band & Buckle..... 6

- 304 Stainless Steel Band 6
- 316 Stainless Steel Band (coated & uncoated)..... 6
- 316 Stainless Steel Clip..... 7
- 316 Stainless Steel Ear-Lokt Buckle 8
- 317L Stainless Steel Band..... 9
- AA Stainless Steel Band..... 9
- All Purpose Band..... 10
- Alloy 400 Band..... 11
- Alloy 400 Buckle..... 11
- BAND-IT® Band: 201 Stainless Steel Band..... 12
- BAND-IT® Buckle, Ear-Lokt Style..... 13
- Center Punch Buckle..... 14
- Coils & Seals 14
- Galvanized Carbon Steel Band..... 17
- Galvanized Carbon Steel Buckle 18
- Giant Band..... 19
- Giant Buckle, Ear-Lokt Style..... 19
- PRO-LOKT Clip..... 20
- Roll-Band with COLOR-IT®..... 20
- Scru-Lokt Buckle, Stainless Steel 22
- Stainless Steel Clip..... 23
- Stainless Steel Valuclip..... 23
- VALU-STRAP™ Band, VALU-STRAP™ Plus Band, and Valuband..... 24
- Zeron® 100..... 25

Banding Systems..... 26

- BAND-FAST® Open End with Center Punch Clip..... 26
- BAND-FAST® with Clip 27
- BAND-FAST® with COLOR-IT®..... 28
- BAND-FAST® with Ear-Lokt Buckle..... 35
- BAND-FAST® with Seals 36
- Center Punch..... 37
- Dual-Lokt®..... 38
- Flat Seal BAND-FAST®..... 39
- Insulation BAND-FAST®..... 40
- Junior® Smooth ID Clamps..... 41

• Tie-Lok® Ties.....	44
• Ultra-Lok® System.....	45
Cable Ties	48
• Ball-Lok Ties.....	48
• Mini Tie-Lok®.....	55
• Multi-Lok® Ties.....	56
• Reusable AE Ties.....	57
• Ultra-Lok® Cable Ties.....	58
Identification	59
• BAND-FAST® with COLOR-IT®.....	59
• Easy Carriers.....	66
• Easy Read Characters.....	66
• ID Tags.....	68
• Identification Kit.....	69
• Stainless Steel Tape Embossing System.....	69
Mounting Hardware & Brackets	70
• 2 Bolt Brack-It.....	70
• BAND-IT Bolt/Clamps.....	70
• Bolts and Washers for Brack-Its.....	71
• Channel Extrusion.....	71
• L-Mount Right Angle Brack-It.....	72
• Mini Brack-It.....	73
• Mounting Plates.....	73
• Scru-Seal Adjustable Clamps.....	74
• Signal Mounts.....	75
• Single Bolt Clip – Round.....	76
• Single Bolt Flared Leg Brack-It.....	76
• Single Bolt Straight Leg Brack-It.....	77
• Universal Channel Clamp.....	78
• Valmount Brack-It.....	78
Preformed Clamps	79
• Tie-Lok® Preformed Ties / Universal Clamp.....	79
• Ultra-Lok® Clamps.....	79
Tools	80
• A91079: Mini Tie-Lok® Tool.....	80
• A92079: Tie-Lok II® Tool.....	80
• A94079: 1/4" ULTRA-LOK® Tool.....	81

• AE2009: Cable Tie Tensioner	81
• C00169: Standard Banding Tool.....	82
• C00269: Junior® Preformed Clamp Tool.....	82
• C00369: Heavy Duty Banding Tool.....	83
• C07569: Bantam Tool.....	83
• C08569: Bantam Strapping Tool.....	84
• C40099: Ratchet Tool.....	84
• CP4000-D: Center Punch Cordless Tool.....	85
• DS1099: Nicopress Oil Well Hand Tool.....	86
• G40269: Giant Banding Tool.....	86
• iCS Series Tool.....	87
• IT0750 – IT6000 Tools.....	88
• IT7000 1/4" Tie-Lok® Precision Fastening Tool.....	89
• IT8000 3/8" Tie-Lok® Precision Fastening Tool.....	90
• J00169: Junior® Clamp Adapter.....	90
• J02069: Pok-It II Tool with Cutter.....	91
• J05069: Junior® Heavy Duty Adapter.....	91
• K50289: Ball-Lok Tool.....	91
• M50389: Multi-Lok Hand Tool.....	92
• S03869: Center Punch Tool	92
• S35099: Pneumatic Junior® Clamp Automatic Air Tool.....	93
• S75099: Pneumatic Junior® Clamp Tool.....	94
• SM1700: Pneumatic Center Punch Clamp Automatic Air Tool	95
• T30069: Center Punch Tool	95
• TL3800: Tie-Lok Tool®.....	96
• UL4000-D: Ultra-Lok® Cordless Tool.....	96
• X80304: Signode Pneumatic Combination Tool.....	96
• X80305: Signode Pneumatic Sealer.....	97
• X80306: Signode Pneumatic Tensioner.....	97
• XE4809: Fromm Pneumatic Combination Tool.....	97
• XE9229: Tensioning Tool.....	98

304 STAINLESS STEEL BAND

This alloy will provide very good corrosion resistance in fresh water and industrial atmospheres. Often selected for light duty applications in food processing, chemical, power transmission and cable management.

304 is cool.

PRODUCT SPECIFICATIONS

PART NO.	MATERIAL	WIDTH (IN)	THICKNESS (IN)	AVERAGE BREAKING STRENGTH (LBS)	PACKAGE QUANTITY	WEIGHT (LBS)
C91399	304 SS	3/8	0.02	600	200'/Roll	5.9
C91499	304 SS	1/2	0.02	850	200'/Roll	7.6
C91599	304 SS	5/8	0.02	1000	200'/Roll	9.5
C91699	304 SS	3/4	0.02	1275	200'/Roll	11.3



**The J02069 Pok-It II Tool with Cutter can be used with 3/8" maximum width product.*

316 STAINLESS STEEL BAND (COATED & UNCOATED)

This alloy provides superior corrosion resistance in fresh water and typical atmospheres and is non-magnetic. Ideal for food process, chemical / agricultural hose assemblies, marine splash zones and some acidic environments.

- Available with halogen-free coating (PPA 571) for additional corrosion resistance and smoother edges
- Utilized in general use banding applications for marine splash zones
- Comes with Easy Scale patented imprint on the band to quickly determine band length without waste

PRODUCT SPECIFICATIONS

PART NO.	MATERIAL	WIDTH (IN)	THICKNESS (IN)	AVERAGE BREAKING STRENGTH (LBS)	PACKAGE QUANTITY	WEIGHT (LBS)
----------	----------	------------	----------------	---------------------------------	------------------	--------------



316 Stainless Steel Band Coated

AE4329	316 SS	1/4	0.048**	335	82.5'/Roll	2
AE4339	316 SS	3/8	0.048**	505	82.5'/Roll	2.6
AE4349	316 SS	1/2	0.048**	670	82.5'/Roll	3.5
AE4359	316 SS	5/8	0.048**	840	82.5'/Roll	4.4
AE4369	316 SS	3/4	0.048**	1000	82.5'/Roll	5.3

****Material thickness includes PPA 571 coating – Base material thickness is 0.015"**

316 Stainless Steel Band Uncoated

C40299	316 SS	1/4	0.02	400	100'/Roll	2
C40399	316 SS	3/8	0.025	750	100'/Roll	3.5
C40499	316 SS	1/2	0.03	1200	100'/Roll	4.9
C404B9	316 SS	1/2	0.03	1200	Blue Tote 100'/Roll	5.6
C40599	316 SS	5/8	0.03	1500	100'/Roll	6.2
C405G9	316 SS	5/8	0.03	1500	Green Tote 100'/Roll	6.9
C40699	316 SS	3/4	0.03	1800	100'/Roll	7.5
C406R9	316 SS	3/4	0.03	1800	Red Tote 100'/Roll	8.2

**The J02069 Pok-It II Tool with Cutter can be used with 3/8" maximum width product.*

316 STAINLESS STEEL CLIP

BAND-IT® 316 SS Clip can be used with type 316 stainless steel banding that offers superior corrosion resistance.

- Used with 316 316 coated & uncoated roll band
- Utilized in general use banding applications for marine splash zone
- Can hold a single or double wrapped band configuration
- Band clamps can be formed over any contour or shape

PRODUCT SPECIFICATIONS



PART NO.	MATERIAL	WIDTH (IN)	PACKAGE QUANTITY	WEIGHT (LBS)
AE4529	316 SS	1/4	100/Box	0.3
AE4539	316 SS	3/8	100/Box	0.6
AE4549	316 SS	1/2	100/Box	1
AE4559	316 SS	5/8	100/Box	1.1
AE4569	316 SS	3/4	100/Box	1.3

316 STAINLESS STEEL EAR-LOKT BUCKLE

BAND-IT® Ear-Lokt Buckles can be used with type 316 stainless steel banding providing superior fastening strength and corrosion resistance.

- Used with C40399 BAND-IT® 316 Stainless Steel Banding
- Utilized in general use banding applications for marine splash zone
- Can hold a single or double wrapped band configuration
- Band clamps can be formed over any contour or shape

PRODUCT SPECIFICATIONS



PART NO.	MATERIAL	WIDTH (IN)	PACKAGE QUANTITY	WEIGHT (LBS)
C45299**	316 SS	1/4	100/Box	0.3
C45399	316 SS	3/8	100/Box	0.8
C45499	316 SS	1/2	100/Box	2.1
C45599	316 SS	5/8	100/Box	2.4
C45699	316 SS	3/4	100/Box	3.7

** Clip Style

317L STAINLESS STEEL BAND

This alloy has superior corrosion resistance and is typically used to wrap bleach drums in the pulp and paper mills. The “L” indicates a low carbon content, which significantly improves its welding characteristics.

- Superior corrosion resistance in industrial and marine atmospheres, salt water, and mild chemicals
- Product available in 300' rolls for easy handling
- Smooth edges for safe handling
- Ultimate tensile strength of 115,000 psi
- Low profile 0.030” thickness of band
- Specialty products may be subject to extended lead time and minimum order quantities

PRODUCT SPECIFICATIONS

PART NO.	MATERIAL	WIDTH (IN)	THICKNESS (IN)	AVERAGE BREAKING STRENGTH (LBS)	PACKAGE QUANTITY	WEIGHT (LBS)
C41399	317L 1/4 Hard SS	3/8	0.030	1290	300'/Roll	11.9
C42499	317L 1/4 Hard SS	1/2	0.020	1160	300'/Roll	10.2
C41499	317L 1/4 Hard SS	1/2	0.030	1725	300'/Roll	15.9
C41599	317L 1/4 Hard SS	5/8	0.030	2150	300'/Roll	19.9
C41699	317L 1/4 Hard SS	3/4	0.030	2580	300'/Roll	23.9



AA STAINLESS STEEL BAND

***Note: This product is only available in Europe.**

Economical band suitable for light duty applications in typical atmospheres.

- Also available in Mill coil. All sizes in standard cardboard packaging.
- All sizes available in plastic dispensers.

PRODUCT SPECIFICATIONS



PART NO.	MATERIAL	WIDTH (IN)	THICKNESS (IN)	AVERAGE BREAKING STRENGTH (LBS)	PACKAGE QUANTITY	WEIGHT (LBS)
Any Austenitic Stainless Steel Band						
C92399	AA SS	3/8	0.024	600	100' Roll	3.2
C92499	AA SS	1/2	0.028	600	100' Roll	4.8
C92599	AA SS	5/8	0.028	1000	100' Roll	6.2
C92699	AA SS	3/4	0.028	1275	100' Roll	7.5

These products are available in Full Mill Coil.

PART NO.	MATERIAL	WIDTH (IN)	THICKNESS (IN)	DESCRIPTION	PACKAGE QUANTITY	WEIGHT (LBS)
Any Austenitic Stainless Steel Band in Totes						
C923Y	AA SS	3/8	0.024	Band + Yellow Dispenser	100' Roll	3.2
C924B	AA SS	1/2	0.028	Band + Blue Dispenser	100' Roll	5.0
C925G	AA SS	5/8	0.028	Band + Green Dispenser	100' Roll	6.4
C926R	AA SS	3/4	0.028	Band + Red Dispenser	100' Roll	7.7

ALL PURPOSE BAND

Evenly spaced holes allow fastening with screw or nut and bolt. Uncoated or coated with halogen free coating (PPA 571). Easy to install with common hand tools.

PRODUCT SPECIFICATIONS



PART NO.	MATERIAL	WIDTH (IN)	THICKNESS (IN)	DIAMETER OF HOLE (IN)	PACKAGE QUANTITY	WEIGHT (LBS)
All Purpose Band Coated						
AE4759	316 SS	1/2	0.050	0.19	82.5'/Roll	3.1
AE4769	316 SS	3/4	0.050	0.27	82.5'/Roll	5.3
AE4779	316 SS	1	0.050	0.31	82.5'/Roll	7.3
<i>NOTE: Material thickness includes PPA 571 coating – Base material thickness is 0.030"</i>						
All Purpose Band Uncoated						
AE4259	316 SS	1/2	0.030	0.19	82.5'/Roll	3.1
AE4269	316 SS	3/4	0.030	0.27	82.5'/Roll	4.6
AE4279	316 SS	1	0.030	0.31	82.5'/Roll	5.5

ALLOY 400 BAND

The material of choice for submerged marine and harsh chemical applications.

- Specialty products may be subject to extended lead time and minimum order quantities

PRODUCT SPECIFICATIONS

PART NO.	MATERIAL	WIDTH (IN)	THICKNESS (IN)	AVERAGE BREAKING STRENGTH (LBS)	PACKAGE QUANTITY	WEIGHT (LBS)
C80599	Alloy 400 Band	5/8	0.030	1310	100'/Roll	7.7
C80699	Alloy 400 Band	3/4	0.030	1595	100'/Roll	7.7



**The J02069 can be used with 3/8" maximum width product.*

ALLOY 400 BUCKLE

The material of choice for submerged marine and harsh chemical applications.

Specialty products may be subject to extended lead time and minimum order quantities

PRODUCT SPECIFICATIONS



PART NO.	MATERIAL	WIDTH (IN)	PACKAGE QUANTITY	WEIGHT (LBS)
C85599	Alloy 400	5/8	100/Box	2.4
C85699	Alloy 400	3/4	100/Box	3.7

BAND-IT® BAND: 201 STAINLESS STEEL BAND

This is the standard choice of BAND-IT products, offering very high strength, clean appearance and good resistance to oxidation and weathering. This non-magnetic material is the choice for municipal and industrial markets. Now with EASY SCALE®, a patented imprint on the band to determine band length. Eliminates costly waste and complicated measuring by allowing users to quickly and precisely roll out the length of band needed for any clamp. No more guesswork!

- 201 Stainless Steel offers good resistance to oxidation and many moderate corrosive agents
- Utilized in general use banding applications
- Can be used with clip style buckles to create band clamps
- Packaged in a standard box or a durable plastic tote for easy dispensing

PRODUCT SPECIFICATIONS



PART NO.	MATERIAL	WIDTH (IN)	THICKNESS (IN)	AVERAGE BREAKING STRENGTH (LBS)	PACKAGE QUANTITY	WEIGHT (LBS)
C20299	201 SS	1/4	0.020	500	100'/Roll	1.7
C20399	201 SS	3/8	0.025	900	100'/Roll	3.2
C203Y9	201 SS	3/8	0.025	900	Yellow Tote 100'/Roll	3.6
C20499	201 SS	1/2	0.030	1500	100'/Roll	5.1
C204B9	201 SS	1/2	0.030	1500	Blue Tote 100'/Roll	5.5
C20599	201 SS	5/8	0.030	1875	100'/Roll	6.4

PART NO.	MATERIAL	WIDTH (IN)	THICKNESS (IN)	AVERAGE BREAKING STRENGTH (LBS)	PACKAGE QUANTITY	WEIGHT (LBS)
C205G9	201 SS	5/8	0.030	1875	Green Tote 100'/Roll	6.8
C20699	201 SS	3/4	0.030	2250	100'/Roll	7.7
C206R9	201 SS	3/4	0.030	2250	Red Tote 100'/Roll	8.2

BAND-IT® BUCKLE, EAR-LOKT STYLE

BAND-IT® Ear-Lokt Buckles can be used with many types of BAND-IT® stainless steel banding providing superior fastening strength.

- Ear-Lokt style buckle for standard duty applications including hose assemblies, cable bundling and general fastening
- 201 Stainless Steel offers good resistance to oxidation and many moderate corrosive agents
- Can hold a single or double wrapped band configuration
- Band clamps can be formed over any contour or shape

PRODUCT SPECIFICATIONS

PART NO.	MATERIAL	WIDTH (IN)	PACKAGE QUANTITY	WEIGHT (LBS)
C25299**	201 SS	1/4	100/Box	0.3
C25399	201 SS	3/8	100/Box	0.8
C25499	201 SS	1/2	100/Box	2.1
C25599	201 SS	5/8	100/Box	2.4
C25699	201 SS	3/4	100/Box	3.7

** Clip Style



PART NO.	MATERIAL	COLOR	WIDTH (IN)	PACKAGE QUANTITY	WEIGHT (LBS)
----------	----------	-------	------------	------------------	--------------

BKEC-A08-Z900	201/301 SS	Black	1/2	100/Box	1.7
BKEC-A12-Z900	201/301 SS	Black	3/4	100/Box	3.5

CENTER PUNCH BUCKLE

201 SS Steel 5/8" center punch buckle for use with 5/8" (15.9mm) wide x 0.025" (.635mm) thick roll band

PRODUCT SPECIFICATIONS

PART NO.	MATERIAL	WIDTH (IN)	PACKAGE QUANTITY	COLOR
L40599	Stainless Steel	5/8	100/Box	Stainless
BKPC-A10-Z900	Stainless Steel	5/8	100/Box	Galvanized Black




COILS & SEALS

When used with seals, band coils provide low cost fastening solutions vs. other clamp types, perfect for downhole and subsea applications. 30-40 lb. "Safety Coils" allow for single operator safe handling. Available in a variety of materials for the following applications.

- Downhole Applications
- Subsea Applications
- Insulation Applications

PRODUCT SPECIFICATIONS



Coils for Downhole & Subsea Applications

PART NUMBER	MATERIAL	WIDTH (IN)	THICKNESS (IN)	COIL WEIGHT (LBS)
Alloy 400, Full Hard				
C82649	Alloy 400, Full Hard	3/4	0.020	30-40
C82699	Alloy 400, Full Hard	3/4	0.020	40-60
C84699	Alloy 400, Full Hard	3/4	0.025	40-60
Alloy 400, 1/4 Hard				
C83699	Alloy 400 1/4 Hard	3/4	0.025	40-60
C83649	Alloy 400 1/4 Hard	3/4	0.025	30-40
Zeron® 100				
C82749	ZERON® 100	3/4	0.020	30-40
C82799	ZERON® 100	3/4	0.02	40-60
304 1/4 Hard SS				
C82349	304 SS 1/4 Hard	3/4	0.020	30-40
C82399	304 SS 1/4 Hard	3/4	0.020	65-75
C83399	304 SS 1/4 Hard	3/4	0.025	65-75
316 SS				
C83349	316 SS	3/4	0.025	30-40
C83499	316 SS	3/4	0.025	65-75
Titanium				
X34299	Titanium	3/4	.025	40-60
Carbon Steel				
R00331	Galvanized Carbon Steel	3/4	0.025	40-80

Coils for Subsea Applications Only

PART NUMBER	MATERIAL	WIDTH (IN)	THICKNESS (IN)	COIL WEIGHT (LB)
Alloy 625				
X82201	Alloy 625	1 1/4	.030	40-80
Carbon Steel				
R00332	Galvanized Carbon Steel	1 1/4	.025	40-80
Zeron® 100				
R00880	ZERON® 100	1 1/4	.025	40-80

Coils for Insulation Applications

PART NUMBER	MATERIAL	WIDTH (IN)	THICKNESS (IN)	PACKAGE QTY	PACKAGE WEIGHT (LB)
304 SS					
C91499	304 SS	1/2	0.020	200'/roll	7
C93299	304 SS	1/2	0.020	850'/roll	28

**Use with C00169 or C40099 tools*

Seals for Downhole & Subsea Applications

PART NUMBER	MATERIAL	WIDTH (IN)	PACKAGE QUANTITY
Alloy 400			
C34699	Alloy 400	3/4	1000/box
ZERON® 100			
C34799	ZERON® 100	3/4	1000/box
304 1/4 Hard SS			
C34399	304 SS 1/4 Hard	3/4	1000/box

PART NUMBER	MATERIAL	WIDTH (IN)	PACKAGE QUANTITY
316 SS			
C34499	316 SS	3/4	1000/box
Titanium			
C34287	Titanium	3/4	1000/box
Carbon Steel			
X34999	Galvanized Carbon Steel	3/4	1000/box

Seals for Subsea Applications Only

PART NUMBER	MATERIAL	WIDTH (IN)	PACKAGE QUANTITY
Alloy 625			
X78201	Alloy 625	1 1/4	1000/box
Carbon Steel			
X78387	Galvanized Carbon Steel	1 1/4	1000/box
ZERON® 100			
BKS-Z20	ZERON® 100	1 1/4	1000/box

GALVANIZED CARBON STEEL BAND

An economical choice offering medium strength, BAND-IT® galvanized carbon steel banding is used mainly in lower cost applications where corrosion resistance is not a factor.

- Galvanized carbon steel band offers medium strength coupled with good corrosion resistance in mild atmospheres and occasional fresh water
- Used with Ear-Lokt Style Buckles for medium duty applications
- Can be formed as single or double wrapped band configuration
- Utilized in general use banding applications

PRODUCT SPECIFICATIONS

PART NO.	MATERIAL	WIDTH (IN)	THICKNESS (IN)	AVERAGE BREAKING STRENGTH (LBS)	PACKAGE QUANTITY	WEIGHT (LBS)
C30499	GCS	1/2	0.03	1125	100'/Roll	5.1
C30599	GCS	5/8	0.03	1405	100'/Roll	6.4
C30699	GCS	3/4	0.03	1690	100'/Roll	7.7

These products are available in Full Mill Coil.



GALVANIZED CARBON STEEL BUCKLE

BAND-IT® galvanized carbon steel banding and buckles is used mainly in lower cost applications where corrosion resistance is not a factor.

- Galvanized carbon steel offers medium strength coupled with good corrosion resistance in mild atmosphere and occasional fresh water
- Ear-Lokt Style Buckle for medium duty applications
- Can hold a single or double wrapped band configuration

PRODUCT SPECIFICATIONS

PART NO.	MATERIAL	WIDTH (IN)	PACKAGE QUANTITY	WEIGHT (LBS)
C35499	GCS	1/2	100/Box	2.1
C35599	GCS	5/8	100/Box	2.4
C35699	GCS	3/4	100/Box	3.7



GIANT BAND

BAND-IT® Giant Band is tough where tough counts. Giant Band produces the strongest band clamp on the market. Giant Band can be formed into a single or double wrapped clamp configuration, and offers the widest and thickest band to provide maximum strength. Available in 201 SS bright or matte finish.

- Produced with 201 Stainless Steel in a shiny finish
- Offers good resistance to oxidation and many moderate corrosive agents

PRODUCT SPECIFICATIONS



PART NO.	MATERIAL	WIDTH (IN)	THICKNESS (IN)	AVERAGE BREAKING STRENGTH (LBS)	PACKAGE QUANTITY	WEIGHT (LBS)	FINISH
G43099*	201 SS	3/4	0.044	3300	100'/Roll	11.6	
G43199	201 SS	1	0.044	4400	100'/Roll	13.7	
G43299	201 SS	1-1/4	0.044	5500	100'/Roll	17.2	

*C00369 Heavy Duty Banding tool to be used for 3/4"

GIANT BUCKLE, EAR-LOKT STYLE

BAND-IT® Ear-Lokt Buckles can be used with BAND-IT® Giant Band for superior fastening strength.

- 201 Stainless Steel offers good resistance to oxidation and many moderate corrosive agents
- Provides maximum strength
- Ear-Lokt Style Buckle for heavy duty applications, can hold a single or double wrapped band configuration

PRODUCT SPECIFICATIONS

PART NO.	MATERIAL	WIDTH (IN)	PACKAGE QUANTITY	WEIGHT (LBS)
G44099	201 SS	3/4	25/Box	1.8
G44199	201 SS	1	25/Box	2.4
G44299	201 SS	1-1/4	25/Box	3.2



PRO-LOKT CLIP

304 SS clip used with 1/2" 304 SS band, frequently used for insulation jacketing attachment.

PRODUCT SPECIFICATIONS

PART NO.	MATERIAL	WIDTH (IN)	PACKAGE QUANTITY	COLOR
BKWM-E08	304 SS	1/2	1000/box	Stainless




ROLL-BAND WITH COLOR-IT®

COLOR-IT® Coatings are available in a variety of colors and types providing superior performance and manufactured with your specific application in mind. Whether you are color-matching decorative light poles, identifying materials, or matching existing hardware on specific projects, COLOR-IT® has the right coating for your project needs.

- COLOR-IT® coatings come in a wide range of colors, and offer superior performance, UV resistance and durability
- Utilized in general use banding applications
- Perfect for color identification and/or matching decorative needs
- Comes in a durable clear plastic tote for easy dispensing
- Custom colors available upon request

PRODUCT SPECIFICATIONS



PART NUMBER	MATERIAL	WIDTH (IN)	THICKNESS (IN)	PACKAGE QUANTITY	COLOR
1/2" Roll Band with COLOR-IT®					
C14499	201 SS	1/2	0.025	100'/Roll	Stainless
C144C9-P000	201 SS	1/2	0.025	100'/Roll	White
C144C9-P100	201 SS	1/2	0.025	100'/Roll	Red
C144C9-P200	201 SS	1/2	0.025	100'/Roll	Orange
C144C9-P300	201 SS	1/2	0.025	100'/Roll	Yellow
C144C9-P302	201 SS	1/2	0.025	100'/Roll	Tan
C144C9-P400	201 SS	1/2	0.025	100'/Roll	Green
C144C9-P500	201 SS	1/2	0.025	100'/Roll	Blue
C144C9-P550	201 SS	1/2	0.025	100'/Roll	Light Blue
C144C9-P600	201 SS	1/2	0.025	100'/Roll	Purple
C144C9-P700	201 SS	1/2	0.025	100'/Roll	Gray
C144C9-P800	201 SS	1/2	0.025	100'/Roll	Brown
C144C9-P900	201 SS	1/2	0.025	100'/Roll	Black

PART NUMBER	MATERIAL	WIDTH (IN)	THICKNESS (IN)	PACKAGE QUANTITY	COLOR
5/8" Roll Band with COLOR-IT®					
C14599	201 SS	5/8	0.025	100'/Roll	Stainless
C14599-P000	201 SS	5/8	0.025	100'/Roll	White
C14599-P100	201 SS	5/8	0.025	100'/Roll	Red
C14599-P200	201 SS	5/8	0.025	100'/Roll	Orange
C14599-P300	201 SS	5/8	0.025	100'/Roll	Yellow
C14599-P302	201 SS	5/8	0.025	100'/Roll	Tan
C14599-P400	201 SS	5/8	0.025	100'/Roll	Green
C14599-P500	201 SS	5/8	0.025	100'/Roll	Blue
C14599-P550	201 SS	5/8	0.025	100'/Roll	Light Blue
C14599-P600	201 SS	5/8	0.025	100'/Roll	Purple

PART NUMBER	MATERIAL	WIDTH (IN)	THICKNESS (IN)	PACKAGE QUANTITY	COLOR
C14599-P700	201 SS	5/8	0.025	100'/Roll	Gray
C14599-P800	201 SS	5/8	0.025	100'/Roll	Brown
C14599-P900	201 SS	5/8	0.025	100'/Roll	Black

PART NUMBER	MATERIAL	WIDTH (IN)	THICKNESS (IN)	PACKAGE QUANTITY	COLOR
3/4" Roll Band with COLOR-IT®					
C206C9-P900	201 SS	3/4	0.030	100'/Roll	Black

SCRU-LOKT BUCKLE, STAINLESS STEEL

BAND-IT® Scru-Lokt Buckles can be used with all types of steel banding providing superior fastening strength and adjustability.

- 301SS 1/4 hard steel, offers good resistance to oxidation and many moderate corrosive agents
- Use whenever an adjustable, or temporary clamp is required. Can be retensioned at any time
- Utilized in general use banding applications
- Can hold a single or double wrapped band configuration
- Buckle is locked by tightening set scru with hex key provided in package

PRODUCT SPECIFICATIONS

PART NO.	MATERIAL	WIDTH (IN)	PACKAGE QUANTITY	WEIGHT (LBS)
C72099	301 SS 1/4 Hard	1/4	50/Box	0.3
C72299	301 SS 1/4 Hard	3/8	50/Box	0.5
C72499	301 SS 1/4 Hard	1/2	25/Box	0.5
C72599	201 SS	5/8	25/Box	0.8
C72699	201 SS	3/4	25/Box	0.9



STAINLESS STEEL CLIP

Stainless Steel offers good resistance to oxidation and many moderate corrosive agents

- Can hold a single or double wrapped band configuration
- Band clamps can be formed over any contour or shape

PRODUCT SPECIFICATIONS

PART NO.	MATERIAL	WIDTH (IN)	PACKAGE QUANTITY	WEIGHT (LBS)
C25299	200/300 SS	1/4	100/Box	0.3
L15499	200/300 SS	1/2	100/Box	1.5
L15599	200/300 SS	5/8	100/Box	1.8
L15699	200/300 SS	3/4	100/Box	2.6



STAINLESS STEEL VALUCLIP

BAND-IT® Valuclicks are used on BAND-IT® Band, BAND-IT® Band with COLOR-IT®, BAND-FAST®, VALU-STRAP, VALU-STRAP PLUS, Valuband, 304 Stainless Steel Band, and 316 Stainless Steel Band.

- 200/300 Stainless Steel, economical and easy to install
- Utilized in light duty and general use banding applications
- Clip can hold a single or double wrapped band configuration
- Used frequently for cable bundling, insulation and hose bundling applications

PRODUCT SPECIFICATIONS

PART NO.	MATERIAL	WIDTH (IN)	PACKAGE QUANTITY	WEIGHT (LBS)
C15399	200/300 SS	3/8	100/Box	0.6
C15499	200/300 SS	1/2	100/Box	1.1



PART NO.	MATERIAL	WIDTH (IN)	PACKAGE QUANTITY	WEIGHT (LBS)
C15489	200/300 SS	1/2	1000/Box	11
C15599	200/300 SS	5/8	100/Box	1.2
C15699	200/300 SS	3/4	100/Box	2.1

PART NO.	MATERIAL	WIDTH (IN)	PACKAGE QUANTITY	COLOR
BKVC-A08-Z900	201/301 SS	1/2	100/Box	Galvanized Black

VALU-STRAP™ BAND, VALU-STRAP™ PLUS BAND, AND VALUBAND

BAND-IT® VALU-STRAP™ Band is the light duty stainless steel banding used in applications ranging from strapping to bundling. May be 200 or 300 series Stainless Steel. Typically non-magnetic, this economy steel is suitable for light duty applications when the benefits of stainless steel are required. Also known as Value Series Stainless Steel.

PRODUCT SPECIFICATIONS

PART NO.	MATERIAL	WIDTH (IN)	THICKNESS (IN)	AVERAGE BREAKING STRENGTH (LBS)	PACKAGE QUANTITY	WEIGHT (LBS)
VALU-STRAP™						
C13699	200/300 SS	3/4	0.015	900	100'/Roll	4.4

These products are available in 300' rolls & Full Mill Coil.

PART NO.	MATERIAL	WIDTH (IN)	THICKNESS (IN)	AVERAGE BREAKING STRENGTH (LBS)	PACKAGE QUANTITY	WEIGHT (LBS)
VALU-STRAP™ Plus						



PART NO.	MATERIAL	WIDTH (IN)	THICKNESS (IN)	AVERAGE BREAKING STRENGTH (LBS)	PACKAGE QUANTITY	WEIGHT (LBS)
C19199	200/300 SS	3/8	0.02	637	100/Roll	2.8
C18189	200/300 SS	1/2	0.02	850	100'/Roll	3.6
C17199	200/300 SS	5/8	0.02	1000	100'/Roll	4.5
C16189	200/300 SS	3/4	0.02	1275	100'/Roll	5.4

PART NO.	MATERIAL	WIDTH (IN)	THICKNESS (IN)	AVERAGE BREAKING STRENGTH (LBS)	PACKAGE QUANTITY	WEIGHT (LBS)
Valuband						
C14499	200/300 SS	1/2	0.025	1000	100'/Roll	4.5
C14599	200/300 SS	5/8	0.025	1250	100'/Roll	5.6
C14699	200/300 SS	3/4	0.025	1590	100'/Roll	6.7

These products are available in 300' rolls & Full Mill Coil.

ZERON® 100

Zeron® 100 material ensures superior corrosion resistance, outperforms common oil & gas band materials, and has stable prices vs. high nickel content alloys.

- Save 50% vs. Alloy 625
- Similar corrosion and strength performance vs. common Subsea alloys

PRODUCT SPECIFICATIONS

Zeron® 100 BAND-FAST®

PART NUMBER	MATERIAL	WIDTH (IN)	THICKNESS (IN)	LENGTH	UNIT OF MEASURE
BFSE-Z1220-Custom Length	Zeron® 100	3/4	0.020	Call or email for custom lengths	Each



PART NUMBER	MATERIAL	WIDTH (IN)	THICKNESS (IN)	LENGTH	UNIT OF MEASURE
BFSE-Z2025-Custom Length	Zeron® 100	1 1/4	0.025	Each	

Zeron® 100 Coils

PART NUMBER	MATERIAL	WIDTH (IN)	THICKNESS (IN)	COIL WEIGHT (LBS)
C83799	Zeron® 100	3/4	0.025	50-60
R00880	Zeron® 100	1 1/4	0.025	50-60

Zeron® 100 Seals

PART NUMBER	MATERIAL	WIDTH (IN)	PACKAGE QTY
C34787	Zeron® 100	3/4	1,000
BKS-Z20	Zeron® 100	1 1/4	1,000

BAND-FAST® OPEN END WITH CENTER PUNCH CLIP

BAND-FAST® is ready to use band, pre-cut and pre-assembled with a clip. Pre-assembled product gives you an edge over your competition as it saves up to 30% time and labor costs for your large projects. Wherever you traditionally use band and buckle, or have a need for innovative products, BAND-FAST® can do the job faster and with less scrap material!

BAND-FAST® is also available in many different materials including: Monel®, Inconel®, AL6XN®, Titanium, 316 and others upon request. May be subject to minimum order quantities.

PRODUCT SPECIFICATIONS



PART NO.	WIDTH (IN)	THICKNESS (IN)	LENGTH (IN)	INSIDE DIAMETER SINGLE WRAP (IN)	INSIDE DIAMETER DOUBLE WRAP (IN)	PACKAGE QUANTITY
O10S99	5/8	0.02	23	5.5	2.75	50/box
O16S99	5/8	0.02	31	5	2.5	50/Box

NOTE: Take the object circumference and add 6" to grip with the tool (2 X circumference for double wrap plus 6" for tail insertion).

BAND-FAST® WITH CLIP

BAND-FAST® is ready to use band, pre-cut and pre-assembled with a clip. Pre-assembled product gives you an edge over your competition as it saves up to 30% time and labor costs for your large projects. Wherever you traditionally use band and buckle, or have a need for innovative products, BAND-FAST® can do the job faster and with less scrap material!

BAND-FAST® is also available in many different materials including: Monel®, Inconel®, AL6XN®, Titanium, 316 and other upon request.

PRODUCT SPECIFICATIONS



PART NO.	MATERIAL	WIDTH (IN)	THICKNESS (IN)	FINISHED LENGTH (IN)	MAX. DIA. SINGLE WRAP (IN)	MAX. DIA. DOUBLE WRAP (IN)	PACKAGE QUANTITY	WEIGHT (LBS)
L22199	201 SS	3/8	0.025	16	3-1/2	1-1/2	100/Box	6.2
L22999	201 SS	3/8	0.025	44	12	6	50/Box	7.2
L28499	201 SS	3/4	0.030	24	6	3	50/Box	10.9
L28899	201 SS	3/4	0.030	37	10	5	25/Box	7.6
L29099	201 SS	3/4	0.030	50	14	7	25/Box	9.7

PART NO.	MATERIAL	WIDTH (IN)	THICKNESS (IN)	FINISHED LENGTH (IN)	MAX. DIA. SINGLE WRAP (IN)	MAX. DIA. DOUBLE WRAP (IN)	PACKAGE QUANTITY	WEIGHT (LBS)
L29299	201 SS	3/4	0.030	62	18	9	25/Box	11.6

* The J02069 Pok-It II Tool with Cutter can be used with 3/8" maximum width product

BAND-FAST® WITH COLOR-IT®


BAND-FAST® is ready to use band, pre-cut and pre-assembled with a clip, buckle or seal. Pre-assembled product gives you an edge over your competition as it saves up to 30% time and labour costs for your large projects. Wherever you traditionally use band and buckle, or have a need for innovative products, BAND-FAST® can do the job faster and with less scrap material!

COLOR-IT® Coatings are available in a variety of colors and types providing superior performance and manufactured with your specific application in mind. Whether you are color-matching decorative light poles, identifying materials, or matching existing hardware on specific projects, COLOR-IT® has the right coating for your project needs. Custom colors are also available. Call for a quote!

PRODUCT SPECIFICATIONS

Valuclip BAND-FAST with COLOR-IT®

PART NUMBER	MATERIAL	WIDTH (IN)	THICKNESS (IN)	LENGTH (IN)	PACKAGE QUANTITY	COLOR
1/2" Valuclip BAND-FAST® with COLOR-IT® – 18" Length						
BFVC-J0825-018-U	201 SS	1/2	0.025	18	100/Box	Stainless
BFVC-J0825-018-P000	201 SS	1/2	0.025	18	100/Box	White
BFVC-J0825-018-P100	201 SS	1/2	0.025	18	100/Box	Red

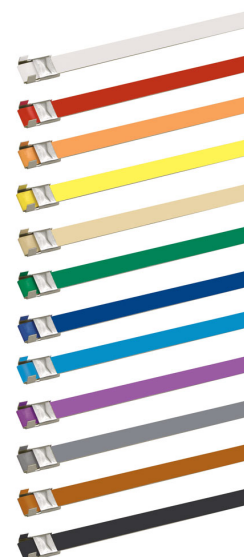

PART NUMBER	MATERIAL	WIDTH (IN)	THICKNESS (IN)	LENGTH (IN)	PACKAGE QUANTITY	COLOR
BFVC-J0825-018-P102	201 SS	1/2	0.025	18	100/Box	Pink
BFVC-J0825-018-P200	201 SS	1/2	0.025	18	100/Box	Orange
BFVC-J0825-018-P300	201 SS	1/2	0.025	18	100/Box	Yellow
BFVC-J0825-018-P302	201 SS	1/2	0.025	18	100/Box	Tan
BFVC-J0825-018-P351	201 SS	1/2	0.025	18	100/Box	Gold
BFVC-J0825-018-P400	201 SS	1/2	0.025	18	100/Box	Green
BFVC-J0825-018-P406	201 SS	1/2	0.025	18	100/Box	Seafoam Green
BFVC-J0825-018-P500	201 SS	1/2	0.025	18	100/Box	Blue
BFVC-J0825-018-P503	201 SS	1/2	0.025	18	100/Box	Turquoise Blue
BFVC-J0825-018-P550	201 SS	1/2	0.025	18	100/Box	Light Blue
BFVC-J0825-018-P600	201 SS	1/2	0.025	18	100/Box	Purple
BFVC-J0825-018-P700	201 SS	1/2	0.025	18	100/Box	Gray
BFVC-J0825-018-P800	201 SS	1/2	0.025	18	100/Box	Brown
BFVC-J0825-018-P900	201 SS	1/2	0.025	18	100/Box	Black

**Black clips available. To request a black clip, add "L" to end of part number in spec table.*

PART NUMBER	MATERIAL	WIDTH (IN)	THICKNESS (IN)	LENGTH (IN)	PACKAGE QUANTITY	COLOR
1/2" Valuclick BAND-FAST® with COLOR-IT®- 24" Length						
BFVC-J0825-024-U	201 SS	1/2	0.025	24	100/Box	Stainless

PART NUMBER	MATERIAL	WIDTH (IN)	THICKNESS (IN)	LENGTH (IN)	PACKAGE QUANTITY	COLOR
BFVC-J0825-024-P000	201 SS	1/2	0.025	24	100/Box	White
BFVC-J0825-024-P100	201 SS	1/2	0.025	24	100/Box	Red
BFVC-J0825-024-P102	201 SS	1/2	0.025	24	100/Box	Pink
BFVC-J0825-024-P200	201 SS	1/2	0.025	24	100/Box	Orange
BFVC-J0825-024-P300	201 SS	1/2	0.025	24	100/Box	Yellow
BFVC-J0825-024-P302	201 SS	1/2	0.025	24	100/Box	Tan
BFVC-J0825-024-P351	201 SS	1/2	0.025	24	100/Box	Gold
BFVC-J0825-024-P400	201 SS	1/2	0.025	24	100/Box	Green
BFVC-J0825-024-P406	201 SS	1/2	0.025	24	100/Box	Seafoam Green
BFVC-J0825-024-P500	201 SS	1/2	0.025	24	100/Box	Blue
BFVC-J0825-024-P550	201 SS	1/2	0.025	24	100/Box	Light Blue
BFVC-J0825-024-P503	201 SS	1/2	0.025	24	100/Box	Turquoise Blue
BFVC-J0825-024-P600	201 SS	1/2	0.025	24	100/Box	Purple
BFVC-J0825-024-P700	201 SS	1/2	0.025	24	100/Box	Gray
BFVC-J0825-024-P800	201 SS	1/2	0.025	24	100/Box	Brown
BFVC-J0825-024-P900	201 SS	1/2	0.025	24	100/Box	Black

**Black clips available. To request a black clip, add "L" to end of part number in spec table.*

PART NUMBER	MATERIAL	WIDTH (IN)	THICKNESS (IN)	LENGTH (IN)	PACKAGE QUANTITY	COLOR
1/2" Valuclick BAND-FAST® with COLOR-IT®- 30" Length						
BFVC-J0825-030-U	201 SS	1/2	0.025	30	100/Box	Stainless
BFVC-J0825-030-P000	201 SS	1/2	0.025	30	100/Box	White
BFVC-J0825-030-P100	201 SS	1/2	0.025	30	100/Box	Red
BFVC-J0825-030-P102	201 SS	1/2	0.025	30	100/Box	Pink
BFVC-J0825-030-P200	201 SS	1/2	0.025	30	100/Box	Orange
BFVC-J0825-030-P300	201 SS	1/2	0.025	30	100/Box	Yellow
BFVC-J0825-030-P302	201 SS	1/2	0.025	30	100/Box	Tan
BFVC-J0825-030-P351	201 SS	1/2	0.025	30	100/Box	Gold
BFVC-J0825-030-P400	201 SS	1/2	0.025	30	100/Box	Green
BFVC-J0825-030-P406	201 SS	1/2	0.025	30	100/Box	Seafoam Green
BFVC-J0825-030-P500	201 SS	1/2	0.025	30	100/Box	Blue
BFVC-J0825-030-P550	201 SS	1/2	0.025	30	100/Box	Light Blue
BFVC-J0825-030-P503	201 SS	1/2	0.025	30	100/Box	Turquoise Blue
BFVC-J0825-030-P600	201 SS	1/2	0.025	30	100/Box	Purple
BFVC-J0825-030-P700	201 SS	1/2	0.025	30	100/Box	Gray
BFVC-J0825-030-P800	201 SS	1/2	0.025	30	100/Box	Brown
BFVC-J0825-030-P900	201 SS	1/2	0.025	30	100/Box	Black

**Black clips available. To request a black clip, add "L" to end of part number in spec table.*

Center Punch BAND-FAST with COLOR-IT®

PART NUMBER	MATERIAL	WIDTH (IN)	THICKNESS (IN)	LENGTH (IN)	PACKAGE QUANTITY	COLOR
5/8" Center Punch BAND-FAST® with COLOR-IT®- 18" Length						
BFPC-J1025-018-U	201 SS	5/8	0.025	18	100/Box	Stainless
BFPC-J1025-018-P000	201 SS	5/8	0.025	18	100/Box	White
BFPC-J1025-018-P100	201 SS	5/8	0.025	18	100/Box	Red
BFPC-J1025-018-P102	201 SS	5/8	0.025	18	100/Box	Pink
BFPC-J1025-018-P200	201 SS	5/8	0.025	18	100/Box	Orange
BFPC-J1025-018-P300	201 SS	5/8	0.025	18	100/Box	Yellow
BFPC-J1025-018-P302	201 SS	5/8	0.025	18	100/Box	Tan
BFPC-J1025-018-P351	201 SS	5/8	0.025	18	100/Box	Gold
BFPC-J1025-018-P400	201 SS	5/8	0.025	18	100/Box	Green
BFPC-J1025-018-P406	201 SS	5/8	0.025	18	100/Box	Seafoam Green
BFPC-J1025-018-P500	201 SS	5/8	0.025	18	100/Box	Blue
BFPC-J1025-018-P550	201 SS	5/8	0.025	18	100/Box	Light Blue
BFPC-J1025-018-P503	201 SS	5/8	0.025	18	100/Box	Turquoise Blue
BFPC-J1025-018-P600	201 SS	5/8	0.025	18	100/Box	Purple
BFPC-J1025-018-P700	201 SS	5/8	0.025	18	100/Box	Gray
BFPC-J1025-018-P800	201 SS	5/8	0.025	18	100/Box	Brown

PART NUMBER	MATERIAL	WIDTH (IN)	THICKNESS (IN)	LENGTH (IN)	PACKAGE QUANTITY	COLOR
BFPC-J1025-018-P900	201 SS	5/8	0.025	18	100/Box	Black

**Black center punch buckle available. To request a black center punch buckle, add "L" to end of part number in spec table.*

PART NUMBER	MATERIAL	WIDTH (IN)	THICKNESS (IN)	LENGTH (IN)	PACKAGE QUANTITY	COLOR
-------------	----------	------------	----------------	-------------	------------------	-------

5/8" Center Punch BAND-FAST® with COLOR-IT®- 24" Length

BFPC-J1025-024-U	201 SS	5/8	0.025	24	100/Box	Stainless
BFPC-J1025-024-P000	201 SS	5/8	0.025	24	100/Box	White
BFPC-J1025-024-P100	201 SS	5/8	0.025	24	100/Box	Red
BFPC-J1025-024-P102	201 SS	5/8	0.025	24	100/Box	Pink
BFPC-J1025-024-P200	201 SS	5/8	0.025	24	100/Box	Orange
BFPC-J1025-024-P300	201 SS	5/8	0.025	24	100/Box	Yellow
BFPC-J1025-024-P302	201 SS	5/8	0.025	24	100/Box	Tan
BFPC-J1025-024-P351	201 SS	5/8	0.025	24	100/Box	Gold
BFPC-J1025-024-P400	201 SS	5/8	0.025	24	100/Box	Green
BFPC-J1025-024-P406	201 SS	5/8	0.025	24	100/Box	Seafoam Green
BFPC-J1025-024-P500	201 SS	5/8	0.025	24	100/Box	Blue
BFPC-J1025-024-P550	201 SS	5/8	0.025	24	100/Box	Light Blue
BFPC-J1025-024-P503	201 SS	5/8	0.025	24	100/Box	Turquoise Blue
BFPC-J1025-024-P600	201 SS	5/8	0.025	24	100/Box	Purple

PART NUMBER	MATERIAL	WIDTH (IN)	THICKNESS (IN)	LENGTH (IN)	PACKAGE QUANTITY	COLOR
BFPC-J1025-024-P700	201 SS	5/8	0.025	24	100/Box	Gray
BFPC-J1025-024-P800	201 SS	5/8	0.025	24	100/Box	Brown
BFPC-J1025-024-P900	201 SS	5/8	0.025	24	100/Box	Black

**Black center punch buckle available. To request a black center punch buckle, add "L" to end of part number in spec table.*

PART NUMBER	MATERIAL	WIDTH (IN)	THICKNESS (IN)	LENGTH (IN)	PACKAGE QUANTITY	COLOR
5/8" Center Punch BAND-FAST® with COLOR-IT®– 30" Length						
BFPC-J1025-030-U	201 SS	5/8	0.025	30	100/Box	Stainless
BFPC-J1025-030-P000	201 SS	5/8	0.025	30	100/Box	White
BFPC-J1025-030-P100	201 SS	5/8	0.025	30	100/Box	Red
BFPC-J1025-030-P102	201 SS	5/8	0.025	30	100/Box	Pink
BFPC-J1025-030-P200	201 SS	5/8	0.025	30	100/Box	Orange
BFPC-J1025-030-P300	201 SS	5/8	0.025	30	100/Box	Yellow
BFPC-J1025-030-P302	201 SS	5/8	0.025	30	100/Box	Tan
BFPC-J1025-030-P351	201 SS	5/8	0.025	30	100/Box	Gold
BFPC-J1025-030-P400	201 SS	5/8	0.025	30	100/Box	Green
BFPC-J1025-030-P406	201 SS	5/8	0.025	30	100/Box	Seafoam Green
BFPC-J1025-030-P500	201 SS	5/8	0.025	30	100/Box	Blue
BFPC-J1025-030-P550	201 SS	5/8	0.025	30	100/Box	Light Blue

PART NUMBER	MATERIAL	WIDTH (IN)	THICKNESS (IN)	LENGTH (IN)	PACKAGE QUANTITY	COLOR
BFPC-J1025-030-P503	201 SS	5/8	0.025	30	100/Box	Turquoise Blue
BFPC-J1025-030-P600	201 SS	5/8	0.025	30	100/Box	Purple
BFPC-J1025-030-P700	201 SS	5/8	0.025	30	100/Box	Gray
BFPC-J1025-030-P800	201 SS	5/8	0.025	30	100/Box	Brown
BFPC-J1025-030-P900	201 SS	5/8	0.025	30	100/Box	Black

**Black center punch buckle available. To request a black center punch buckle, add "L" to end of part number in spec table.*

BAND-FAST® WITH EAR-LOKT BUCKLE

BAND-FAST® is ready to use band, pre-cut and pre-assembled with a buckle. Pre-assembled product gives you an edge over your competition as it saves up to 30% time and labor costs for your large projects. Wherever you traditionally use band and buckle, or have a need for innovative products, BAND-FAST® can do the job faster and with less scrap material

PRODUCT SPECIFICATIONS

PART NO.	MATERIAL	WIDTH (IN)	THICKNESS (IN)	FINISHED LENGTH (IN)	MAX. DIA. SINGLE WRAP (IN)	MAX. DIA. DOUBLE WRAP (IN)	PACKAGE QUANTITY
BFES-A1230-024	201 SS	3/4	0.030	24	5	2.5	25/Box
BFES-A1230-034	201 SS	3/4	0.030	34	8	4	25/Box



PART NO.	MATERIAL	WIDTH (IN)	THICKNESS (IN)	FINISHED LENGTH(IN)	MAX. DIA. SINGLE WRAP (IN)	MAX. DIA. DOUBLE WRAP (IN)	PACKAGE QUANTITY
BFES-A1230-048	201 SS	3/4	0.030	48	12	6	25/Box
BFES-A1230-069	201 SS	3/4	0.030	69	18	9	25/Box
BFES-A1230-090	201 SS	3/4	0.030	90	24	12	15/Box

BAND-FAST® WITH SEALS

Available in a range of corrosion-resistant materials to match your well environment, BAND-FAST® is ready to use band, pre-cut and pre-assembled with a buckle. Pre-assembled product gives you an edge over your competition as it saves up to 30% time and labor costs for your large projects. Wherever you traditionally use band and buckle, or have a need for innovative products, BAND-FAST® can do the job faster and with less scrap material.

PRODUCT SPECIFICATIONS

BAND-FAST for Downhole & Subsea Applications

PART NO.	MATERIAL	WIDTH (IN)	THICKNESS (IN)	LENGTH (IN)	PACKAGE QUANTITY
BFSE1K1225-022	Alloy 400 1/4 Hard SS	3/4	.025	22	100/Box
BFSE-Z1220-022	Zeron® 100	3/4	.020	22	100/Box
BFSE-Z1220-Custom Length	Zeron® 100	3/4	.020	Call for Custom Length	Each
BFSE1E1225-022	304 1/4 Hard SS	3/4	.025	22	100/Box
BFSE-F1225-022	316 SS	3/4	.025	22	100/Box



PART NO.	MATERIAL	WIDTH (IN)	THICKNESS (IN)	LENGTH (IN)	PACKAGE QUANTITY
BFSE-F1225-Custom Length	316 SS	3/4	.025	Call for Custom Length	Each
BFSE-M1225-Custom Length	Titanium	3/4	.025	Call for Custom Length	Each

BAND-FAST for Subsea Applications Only

PART NO.	MATERIAL	WIDTH (IN)	THICKNESS (IN)	LENGTH (IN)	PACKAGE QUANTITY
BFSE-Z2025-Custom Length	Zeron® 100	1 1/4	.025	Call or email for custom lengths	Each
BFSE-L2030-Custom Length	Alloy 625	1 1/4	.030		Each

CENTER PUNCH

Designed to meet your specific application requirement. Used in less demanding applications where minimizing leaks and longevity are not critical. Lock with impact from a hammer using a conical punch designed into the tool.

- Double wrapped steel bands using 201 Stainless Steel or galvanized carbon steel
- Manufactured with 201 Stainless Steel buckles to provide added locking strength
- Not recommended for use with fittings that may crack as a result of impact or poly fittings

PRODUCT SPECIFICATIONS

201 SS* PART NO.	GCS* PART NO.	WIDTH (IN)	THICKNESS (IN)	INSIDE DIAMETER (IN)	WEIGHT (LBS)	PACKAGE QUANTITY
Center Punch Clamp 0.025" Thickness						
CP3S99	CP0399	3/8	0.025	0.81	4.0	100/Box



201 SS* PART NO.	GCS* PART NO.	WIDTH (IN)	THICKNESS (IN)	INSIDE DIAMETER (IN)	WEIGHT (LBS)	PACKAGE QUANTITY
CP311S	CP3119	3/8	0.025	1.38	5.0	100/Box
CP4S99	CP0499	5/8	0.025	1	8.0	100/Box
CP5S99	CP0599	5/8	0.025	1.25	9.0	100/Box
CP6S99	CP0699	5/8	0.025	1.5	10.0	100/Box
CP7S99	CP0799	5/8	0.025	1.75	11.0	100/Box
CP8S99	CP0899	5/8	0.025	2	12.0	100/Box
CP9S99	CP0999	5/8	0.025	2.25	13.0	100/Box
CP10S9	CP1099	5/8	0.025	2.5	7.0	50/Box
CP11S9	CP1199	5/8	0.025	2.75	7.0	50/Box
CP12S9	CP1299	5/8	0.025	3	8.0	50/Box
CP14S9	CP1499	5/8	0.025	3.5	9.0	50/Box
CP16S9	CP1699	5/8	0.025	4	5.0	25/Box
CP18S9	CP1899	5/8	0.025	4.5	6.0	25/Box
CP20S9	CP2099	5/8	0.025	5	6.0	25/Box
CP24S9	CP2499	5/8	0.025	6	7.0	25/Box
CP26S9	CP2699	5/8	0.025	6.5	7.0	25/Box
CP28S9	CP2899	5/8	0.025	7	7.0	25/Box
CP32S9	CP3299	5/8	0.025	8	8.0	25/Box

**BAND-IT reserves the right to substitute material with equal or better corrosion resistance and/or mechanical specifications*

DUAL-LOKT®

Combined with the iCS pneumatic tool, Dual-Lokt® Clamps provide a consistent and verifiable method of attachment.

- Retained Force values of 2.5 times greater than traditional “pinch ear” clamps
- Extreme clamp diameter reduction reduces inventory
- Eliminates repetitive motion injuries during installation



FLAT SEAL BAND-FAST®

Used primarily for banding round cable, Flat Seal BAND-FAST allows for consistent location banding on cable and casing. The short, flat seal is ideal for the lowest profile downhole applications. Call for minimum order quantities.

PRODUCT SPECIFICATIONS

Pre-Bent Flat Seal BAND-FAST®



PART NUMBER	MATERIAL	WIDTH (IN)	THICKNESS (IN)	LENGTH (IN)
304 1/4 Hard SS				
BFXE1E2030-025	304 SS 1/4 Hard	1 1/4"	0.030	25
BFXE1E2030-034	304 SS 1/4 Hard	1 1/4"	0.030	34
Carbon				
BFXE-Q2030-025E	Carbon with 304 Seal	1 1/4"	0.030	25
BFXE-Q2030-034E	Carbon with 304 Seal	1 1/4"	0.030	34

Flat Seal BAND-FAST®

PART NUMBER	MATERIAL	WIDTH (IN)	THICKNESS (IN)	LENGTH (IN)
304 1/4 Hard SS				
BFYE1E2030-025	304 SS 1/4 Hard	1 1/4"	0.030	25

PART NUMBER	MATERIAL	WIDTH (IN)	THICKNESS (IN)	LENGTH (IN)
BFYE1E2030-030	304 SS 1/4 Hard	1 1/4"	0.030	30
BFYE1E2030-034	304 SS 1/4 Hard	1 1/4"	0.030	34
Carbon				
BFYE-Q2030-025E	Carbon with 304 Seal	1 1/4"	0.030	25
BFYE-Q2030-030E	Carbon with 304 Seal	1 1/4"	0.030	30
BFYE-Q2030-034E	Carbon with 304 Seal	1 1/4"	0.030	34

INSULATION BAND-FAST®

BAND-IT's BAND-FAST® preassembled band saves time and money by reducing material waste. Available in 304SS, BAND-FAST® precut band and clips allows for quick, simple installation with hand tools.

PRODUCT SPECIFICATIONS

1/2" x .020" 304 SS



STRETCH OUT (IN)	PART NUMBER	MATERIAL	WIDTH (IN)	THICKNESS (IN)	LENGTH (IN)	PACKAGE QUANTITY
20	BFWE-E0820-020-U	304 SS	1/2	0.020	20	100/Box
26	BFWE-E0820-026-U	304 SS	1/2	0.020	26	100/Box
31	BFWE-E0820-031-U	304 SS	1/2	0.020	31	100/Box
38	BFWE-E0820-038-U	304 SS	1/2	0.020	38	100/Box
44	BFWE-E0820-044-U	304 SS	1/2	0.020	44	100/Box
50	BFWE-E0820-050-U	304 SS	1/2	0.020	50	100/Box
55	BFWE-E0820-055-U	304 SS	1/2	0.020	55	100/Box

STRETCH OUT (IN)	PART NUMBER	MATERIAL	WIDTH (IN)	THICKNESS (IN)	LENGTH (IN)	PACKAGE QUANTITY
61	BFWE-E0820-061-U	304 SS	1/2	0.020	61	100/Box
68	BFWE-E0820-068-U	304 SS	1/2	0.020	68	100/Box
74	BFWE-E0820-074-U	304 SS	1/2	0.020	74	100/Box
80	BFWE-E0820-080-U	304 SS	1/2	0.020	80	100/Box
87	BFWE-E0820-087-U	304 SS	1/2	0.020	87	100/Box
93	BFWE-E0820-093-U	304 SS	1/2	0.020	93	100/Box
106	BFWE-E0820-106-U	304 SS	1/2	0.020	106	100/Box

JUNIOR® SMOOTH ID CLAMPS

Wide choice of sizes and materials in a leak resistant design. Smooth ID Clamps reduce the risk of leaks especially when used on thin walled hoses.

- Vibration resistant lip lock design. No hammering or crimping
- Unique buckle nest and smooth ID design reduces leak paths
- Double wrapped steel bands for additional strength
- Various materials for corrosive environments
- Available for hose assemblies up to 8" outside diameter

PRODUCT SPECIFICATIONS

201 SS* PART NO.	316 SS* PART NO.	GCS* PART NO.	WIDTH (IN)	THICKNESS (IN)	INSIDE DIAMETER (IN)	WEIGHT (LBS)	PACKAGE QUANTITY
JS2409 [^]	NA	NA	1/4	0.02	0.8125	2.0	100/Box
JS2429	NA	NA	1/4	0.02	1	2.1	100/Box



201 SS* PART NO.	316 SS* PART NO.	GCS* PART NO.	WIDTH (IN)	THICKNESS (IN)	INSIDE DIAMETER (IN)	WEIGHT (LBS)	PACKAGE QUANTITY
JS2419	NA	NA	1/4	0.02	1.375	2.5	100/Box
JS2529	NA	NA	1/4	0.02	1.5	2.6	100/Box
JS2539	NA	NA	1/4	0.02	2	3.2	100/Box
JS2209	NA	NA	1/4	0.02	2.5	3.7	100/Box
JS2569	NA	NA	1/4	0.02	2.75	3.8	100/Box
JS2449	NA	NA	1/4	0.02	3	4.2	100/Box
JS2579	NA	NA	1/4	0.02	3.5	4.6	100/Box
JS2019	JS4019	JS3019	3/8	0.025	0.8125	3.6	100/Box
JS2439	NA	JS3439	3/8	0.025	1	3.9	100/Box
JS2029	JS4029	JS3029	3/8	0.025	1.375	5.0	100/Box
JS2459	JS4459	JS3459	3/8	0.025	2	5.9	100/Box
JS2219	NA	NA	3/8	0.025	2.5	6.8	100/Box
JS2469	NA	NA	3/8	0.025	3	7.5	100/Box
JS2559	NA	NA	3/8	0.025	3.5	8.6	100/Box
NA	JS4489	NA	3/8	0.025	4	9.5	100/Box
JS2039	NA	JS3039	1/2	0.030	1	6.5	100/Box
JS2049	JS4049	JS3049	1/2	0.030	1.25	7.2	100/Box
JS2319	NA	NA	1/2	0.030	1.5	8.1	100/Box
JS2369	NA	JS3369	1/2	0.030	1.75	8.7	100/Box
JS2379	NA	NA	1/2	0.030	2	9.4	100/Box
JS2339	NA	JS3339	1/2	0.030	2.5	10.8	100/Box
JS2309	NA	JS3309	1/2	0.030	2.75	11.3	100/Box
JS2349	JS4349	NA	1/2	0.030	3	12.2	100/Box
JS2479	NA	NA	1/2	0.030	3.5	13.6	100/Box
JS2499	NA	NA	1/2	0.030	4	14.9	100/Box
JS2059	JS4059	JS3059	5/8	0.030	1.5	10.4	100/Box
JS2069	JS4069	JS3069	5/8	0.030	1.75	11.3	100/Box
JS2079	NA	JS3079	5/8	0.030	2	12.2	100/Box
JS2089	NA	JS3089	5/8	0.030	2.25	13.3	100/Box
JS2099	JS4099	JS3099	5/8	0.030	2.5	13.9	100/Box
JS2109	NA	JS3109	3/4	0.030	2.75	9.2	50/Box
JS2119	JS4119	JS3119	3/4	0.030	3	9.7	50/Box

201 SS* PART NO.	316 SS* PART NO.	GCS* PART NO.	WIDTH (IN)	THICKNESS (IN)	INSIDE DIAMETER (IN)	WEIGHT (LBS)	PACKAGE QUANTITY
JS2129	NA	JS3129	3/4	0.030	3.5	10.8	50/Box
JS2139	JS4139	JS3139	3/4	0.030	4	6.1	25/Box
JS2149	JS4149	JS3149	3/4	0.030	4.5	6.7	25/Box
JS2159	JS4159	JS3159	3/4	0.030	5	7.2	25/Box
JS2169	NA	NA	3/4	0.030	6	8.2	25/Box
JS2179	NA	JS3179	3/4	0.030	6.5	9.2	25/Box
JS2189	NA	JS3189	3/4	0.030	7	10.2	25/Box
JS2199	NA	NA	3/4	0.030	8	11.0	25/Box

* BAND-IT reserves the right to substitute material with equal or better corrosion resistance and/or mechanical specifications

** Junior Adapters, either J00169 or J05069, must be used with C00169

^ Availability varies by region. May be subject to extended lead times and minimum order quantities.

Alloy 625 BAND-IT JR® Smooth ID Preformed Clamps

Availability varies by region. May be subject to extended lead times and minimum order quantities.

PART NUMBER	WIDTH (IN)	THICKNESS (IN)	INSIDE DIAMETER (IN)
JS6279	3/4	0.030	2.0
JS6109	3/4	0.030	2.75
JS6119	3/4	0.030	3.0
JS6129	3/4	0.030	3.5
JS6139	3/4	0.030	4.0
JS6159	3/4	0.030	5.0
JS6709	3/4	0.030	5.25
JS6169	3/4	0.030	6.0
JS6179	3/4	0.030	6.5
JS6189	3/4	0.030	7.0
JS6199	3/4	0.030	8.0

TIE-LOK® TIES

Offering a unique dimple lock with a smooth ID and a low profile, Tie-Lok® ties provide fast, consistent and reliable clamping tension. Used in many industries and applications, such as automotive, cable bundling and identification.

- Strong patented dimple lock
- Locks under full tension – no slipback
- Available in type 304 and type 316 Stainless Steel
- 304 provides good resistance to mild atmospheres, fresh water, UV rays
- 316 Stainless Steel for enhanced corrosion resistance in extreme environments
- Various sizes designed for standard and custom applications
- Forms a low profile single wrapped assembly to secure cables, hoses, ID Tags, CV Boots, and filter bags

PRODUCT SPECIFICATIONS



PART NO.	MATERIAL	WIDTH (IN)	LENGTH (IN)	THICKNESS (IN)	MAXIMUM DIAMETER SINGLE WRAP (IN)	MINIMUM LOOP TENSILE STRENGTH (LBS)	PACKAGE QUANTITY
AS2119	304 SS	1/4	10	0.015	2	250	100/Bag
AS2129	304 SS	1/4	16.5	0.015	4	250	100/Bag
AS2139	304 SS	1/4	22.5	0.015	6	250	100/Bag
AS2149	304 SS	1/4	29	0.015	8	250	100/Bag
AS2159	304 SS	1/4	35	0.015	10	250	100/Bag
AS4119	316 SS	1/4	10	0.015	2	250	100/Bag
AS4129	316 SS	1/4	16.5	0.015	4	250	100/Bag
AS4139	316 SS	1/4	22.5	0.015	6	250	100/Bag
AS4149	316 SS	1/4	29	0.015	8	250	100/Bag
AS4159	316 SS	1/4	35	0.015	10	250	100/Bag
AS6219	304 SS	3/8	7.2	0.020	1.5	350	100/Bag
AS6229	304 SS	3/8	10	0.020	2	350	100/Bag
AS6239	304 SS	3/8	16	0.020	4	350	100/Bag
AS6249	304 SS	3/8	22.5	0.020	6	350	100/Bag
AS6259	304 SS	3/8	30.5	0.020	8	350	100/Bag

* TL3800 to be used with 3/8" only.

ULTRA-LOK® SYSTEM

Designed for quick installation, highest clamping force and gap-free inside diameter. The best choice for harsh duty applications!

- Apply 3-5 times faster than band and buckle hand tools
- Unique lock formed under full tension maximizing tightness
- Available as free-end band and buckle or preformed clamps
- 201 1/4 hard SS band provides greater material strength allowing tighter clamps and can be double wrapped for additional strength
- Alloy 625 Ultra-Lok Band is available*
- Buckle hood protects lock from snags
- Installs quickly with the UL4000-D cordless tool

PRODUCT SPECIFICATIONS



PART NO.	MATERIAL	WIDTH (IN)	LENGTH (IN)	THICKNESS (IN)	MAX. DIA. SINGLE WRAP (IN)	MAX. DIA. DOUBLE WRAP (IN)	PACKAGE QUANTITY	WEIGHT (LBS)
Ultra-Lok Band								
UL1018**	201 SS	1/2	18	0.030	3	not suggested	50/Box	4.1
UL1024**	201 SS	1/2	24	0.030	5	2.5	50/Box	5.3
UL1032**	201 SS	1/2	32	0.030	7	3.5	50/Box	7.2
UL1046**	201 SS	1/2	46	0.030	11	5.5	25/Box	5.9
UL1070**	201 SS	1/2	70	0.030	18	9	25/Box	8.5

PART NO.	MATERIAL	WIDTH (IN)	LENGTH (IN)	THICKNESS (IN)	MAX. DIA. SINGLE WRAP (IN)	MAX. DIA. DOUBLE WRAP (IN)	PACKAGE QUANTITY	WEIGHT (LBS)
UL1096**	201 SS	1/2	96	0.030	25	12.5	25/Box	11.2
UL1116**	201 SS	1/2	116	0.030	31	15.5	25/Box	13.3
UL2024	201 SS	3/4	24	0.030	5	not suggested	25/Tote	4.1
UL2032	201 SS	3/4	32	0.030	7	3.5	19/Tote	4.3
UL2036	201 SS	3/4	36	0.030	8	4	33/Tote	8.2
UL2044	201 SS	3/4	44	0.030	11	5.5	27/Tote	8.2
UL2048	201 SS	3/4	48	0.030	12	6	25/Tote	8.2
UL2052	201 SS	3/4	52	0.030	13	6.5	23/Tote	8.2
UL2060	201 SS	3/4	60	0.030	15	7.5	20/Tote	8.2
UL2068	201 SS	3/4	68	0.030	17	8.5	17/Tote	8.2
UL2076	201 SS	3/4	76	0.030	20	10	15/Tote	8.2
UL2084	201 SS	3/4	84	0.030	22	11	14/Tote	8.2
UL2092	201 SS	3/4	92	0.030	24	12	13/Tote	8.2
UL2120	201 SS	3/4	120	0.030	32	16	10/Tote	8.2
UL2150	201 SS	3/4	150	0.030	41	20.5	8/Tote	8.2
UL2175	201 SS	3/4	175	0.030	48	24	6/Tote	8.2
Ultra-Lok Buckles								
UB2549	201 SS	1/2					100/Box	2.4
UB2569	201 SS	3/4					100/Box	3.7

** 1/2" Bands will require M09387 for UL4000 Tool.

3/4" width band lengths 36" or longer in 100' Totes; 34" or less in 50' Totes.

Preformed Ultra-Lok Clamps

PART NO.	MATERIAL	WIDTH (IN)	THICKNESS (IN)	INSIDE DIAMETER (IN)	WEIGHT (LBS)	PACKAGE QUANTITY
UL2279	201 SS	3/4	0.030	2	14.9	100/Box
UL2109	201 SS	3/4	0.030	2.75	9.2	50/Box
UL2119	201 SS	3/4	0.030	3	10.4	50/Box
UL2129	201 SS	3/4	0.030	3.5	10.8	50/Box

PART NO.	MATERIAL	WIDTH (IN)	THICKNESS (IN)	INSIDE DIAMETER (IN)	WEIGHT (LBS)	PACKAGE QUANTITY
UL2139	201 SS	3/4	0.030	4	6.4	25/Box
UL2149	201 SS	3/4	0.030	4.5	7	25/Box
UL2159	201 SS	3/4	0.030	5	7.5	25/Box
UL2709	201 SS	3/4	0.030	5.25	7.3	25/Box
UL2169	201 SS	3/4	0.030	6	8.4	25/Box
UL2179	201 SS	3/4	0.030	6.5	10.2	25/Box
UL2189	201 SS	3/4	0.030	7	9.8	25/Box
UL2199	201 SS	3/4	0.030	8	11	25/Box
UL2289	201 SS	3/4	0.030	9	5.1	10/Box

Alloy 625 Ultra-Lok Band

PART NUMBER	MATERIAL	WIDTH (IN)	LENGTH (IN)	MAXIMUM CLAMP DIAMETER	
				SINGLE WRAP (IN)	DOUBLE WRAP (IN)
Contact Us for Part Number & Minimum Order Quantity	Alloy 625	3/4	20	4	not suggested
	Alloy 625	3/4	24	5	not suggested
	Alloy 625	3/4	28	6	not suggested
	Alloy 625	3/4	32	7	3.5
	Alloy 625	3/4	36	8	4
	Alloy 625	3/4	40	10	4.5
	Alloy 625	3/4	44	11	5.5
	Alloy 625	3/4	48	12	6
	Alloy 625	3/4	52	13	6.5
	Alloy 625	3/4	60	15	7.5
	Alloy 625	3/4	68	17	8.5

PART NUMBER	MATERIAL	WIDTH (IN)	LENGTH (IN)	MAXIMUM CLAMP DIAMETER	
				SINGLE WRAP (IN)	DOUBLE WRAP (IN)
Alloy 625	3/4	76	20	10	
Alloy 625	3/4	84	22	11	
Alloy 625	3/4	92	24	12	
Alloy 625	3/4	120	32	16	
Alloy 625	3/4	150	41	20.5	
Alloy 625	3/4	175	18	24	

*Regional specifications vary, some items may be subject to minimum order quantities or extended lead times, 3/4" band is available in plastic totes in the US

BALL-LOK TIES

These ties are quick and easy to apply offering a versatile solution for cable management, hose sleeve attachment, and other medium duty applications. The self-locking buckle offers superior corrosive, abrasive and UV resistance performance that makes this product perfect for harsh or marine environments.

Ball-Lok ties are available in two types: KE premium ties and KT standard ties. The smooth inside diameter of the KE ties further reduces the potential for damage to cabling or shielding during the tensioning process.

Both ties can be installed by hand or with tools to assure uniform tension and clean tail cut-off for safe handling. The two hand tools recommended for this application manually tension and cut-off the tail of the band and can be used on coated or uncoated ties. The XE9229 tool is known as KE9229 outside of North America.

- Manufactured in BAND-IT global sites and UL Certified.
- Available in both 304 and 316 Stainless Steel to provide good to excellent corrosion resistance in a wide variety of environments.
- Self locking design allows fast installation
- Install with tools to ensure uniform tension and clean tail cut-off for safe handling
- This product line is also available with black epoxy coating which reduces the risk of cutting or abrading cable insulation or hose covering

PRODUCT SPECIFICATIONS



KE PREMIUM TIES	KT STANDARD TIES
– Higher loop tensile strength – Available uncoated or coated with 100% black Epoxy – Smooth inner diameter design Certified By:  	– Available uncoated or coated with 30% Polyester and 70% Epoxy – Fold over design

KE Ties

Premium KE ties provide a longer life than nylon ties, especially in extreme climates. The KE ties also have a stronger loop tensile strength than the KT ties. Available in 100% Epoxy coating to reduce the risk of cutting or abrading cable insulation or hose coverings

304 SS UNCOATED PART NO.	316 SS UNCOATED PART NO.	WIDTH (IN)	LENGTH (IN)	BASE MATERIAL THICKNESS (IN)	MAXIMUM BUNDLE DIAMETER (IN)	MINIMUM LOOP TENSILE STRENGTH (LBS)	PACKAGE QUANTITY
KE1118	KE0118*	0.18	5.9	0.01	1.2	200	100/Bag
KE1128	KE0128	0.18	7.9	0.01	2	200	100/Bag
KE1138	KE0138	0.18	10.2	0.01	2.7	200	100/Bag
KE1148	KE0148	0.18	14.2	0.01	4	200	100/Bag
KE1158	KE0158	0.18	20.4	0.01	6	200	100/Bag
KE1168	KE0168	0.18	26.8	0.01	8	200	100/Bag
KE1178	KE0178	0.18	33	0.01	10	200	100/Bag
KE1188	KE0188	0.18	42	0.01	12	200	100/Bag

304 SS UNCOATED PART NO.	316 SS UNCOATED PART NO.	WIDTH (IN)		LENGTH (IN)		BASE MATERIAL THICKNESS (IN)		MAXIMUM BUNDLE DIAMETER (IN)		MINIMUM LOOP TENSILE STRENGTH (LBS)	PACKAGE QUANTITY
KE1328	KE0328	0.31		7.9		0.01		2		300	100/Bag
KE1338	KE0338	0.31		10.2		0.01		2.7		300	100/Bag
KE1348	KE0348	0.31		14.2		0.01		4		300	100/Bag
KE1358	KE0358	0.31		20.4		0.01		6		300	100/Bag
KE1368	KE0368	0.31		26.8		0.01		8		300	100/Bag
KE1378	KE0378	0.31		33		0.01		10		300	100/Bag
KE1388	KE0388	0.31		42		0.01		12		300	100/Bag

316 SS Coated Material

KE0228		0.18		7.9		0.01		2		150	100/Bag
KE0238		0.18		10.2		0.01		2.7		150	100/Bag
KE0248		0.18		14.2		0.01		4		150	100/Bag
KE0258		0.18		20.4		0.01		6		150	100/Bag
KE0268		0.18		26.8		0.01		8		150	100/Bag
KE0278		0.18		33		0.01		10		150	100/Bag
KE0428		0.31		7.9		0.01		2		175	100/Bag
KE0438		0.31		10.2		0.01		2.7		175	100/Bag
KE0448		0.31		14.2		0.01		4		175	100/Bag
KE0458		0.31		20.4		0.01		6		175	100/Bag
KE0468		0.31		26.8		0.01		8		175	100/Bag
KE0478		0.31		33		0.01		10		175	100/Bag

KT Ties – Uncoated

Part Number	Part Number	Width		Length		Base Material Thickness		Maximum Diameter Single Wrap		Minimum Loop Tensile Strength	Package Quantity	Application Tools
304SS	316SS	In	mm	In	mm	In	mm	In	mm	lbs		
KT4U046-010	KT6U046-010	0.18	4.6	3.9	100	0.010	0.25	0.7	19	190	100	K50289 XE9229 C07569 KS652 or by hand

KT4U046-015	KT6U046-015	0.18	4.6	5.9	150	0.010	0.25	1.4	35	190	100
KT4U046-020	KT6U046-020	0.18	4.6	7.9	200	0.010	0.25	2.0	52	190	100
KT4U046-025	KT6U046-025	0.18	4.6	9.8	250	0.010	0.25	2.6	67	190	100
KT4U046-030	KT6U046-030	0.18	4.6	11.8	300	0.010	0.25	3.3	83	190	100
KT4U046-035	KT6U046-035	0.18	4.6	13.8	350	0.010	0.25	3.9	99	190	100
KT4U046-040	KT6U046-040	0.18	4.6	15.7	400	0.010	0.25	4.5	115	190	100
KT4U046-045	KT6U046-045	0.18	4.6	17.7	450	0.010	0.25	5.2	131	190	100
KT4U046-050	KT6U046-050	0.18	4.6	19.7	500	0.010	0.25	5.8	147	190	100
KT4U046-055	KT6U046-055	0.18	4.6	21.7	550	0.010	0.25	6.4	163	190	100
KT4U046-060	KT6U046-060	0.18	4.6	23.6	600	0.010	0.25	7.0	179	190	100
KT4U046-065	KT6U046-065	0.18	4.6	25.6	650	0.010	0.25	7.6	194	190	100
KT4U046-070	KT6U046-070	0.18	4.6	27.6	700	0.010	0.25	8.3	211	190	100
KT4U046-080	KT6U046-080	0.18	4.6	31.5	800	0.010	0.25	9.5	242	190	100
KT4U046-090	KT6U046-090	0.18	4.6	35.4	900	0.010	0.25	10.8	274	190	100
KT4U046-100	KT6U046-100	0.18	4.6	39.4	1000	0.010	0.25	12.0	306	190	100
KT4U046-110	KT6U046-110	0.18	4.6	43.3	1100	0.010	0.25	13.3	338	190	100
KT4U046-120	KT6U046-120	0.18	4.6	47.2	1200	0.010	0.25	14.5	369	190	100
KT4U078-010	KT6U078-010	0.31	7.8	3.9	100	0.010	0.25	0.7	19	280	100
KT4U078-015	KT6U078-015	0.31	7.8	5.9	150	0.010	0.25	1.4	35	280	100
KT4U078-020	KT6U078-020	0.31	7.8	7.9	200	0.010	0.25	2.0	52	280	100

KT4U078-025	KT6U078-025	0.31	7.8	9.8	250	0.010	0.25	2.6	67	280	100
KT4U078-030	KT6U078-030	0.31	7.8	11.8	300	0.010	0.25	3.3	83	280	100
KT4U078-035	KT6U078-035	0.31	7.8	13.8	350	0.010	0.25	3.9	99	280	100
KT4U078-040	KT6U078-040	0.31	7.8	15.7	400	0.010	0.25	4.5	115	280	100
KT4U078-045	KT6U078-045	0.31	7.8	17.7	450	0.010	0.25	5.1	131	280	100
KT4U078-050	KT6U078-050	0.31	7.8	19.7	500	0.010	0.25	5.8	147	280	100
KT4U078-055	KT6U078-055	0.31	7.8	21.7	550	0.010	0.25	6.4	163	280	100
KT4U078-060	KT6U078-060	0.31	7.8	23.6	600	0.010	0.25	7.0	179	280	100
KT4U078-065	KT6U078-065	0.31	7.8	25.6	650	0.010	0.25	7.6	194	280	100
KT4U078-070	KT6U078-070	0.31	7.8	27.6	700	0.010	0.25	8.3	211	280	100
KT4U078-080	KT6U078-080	0.31	7.8	31.5	800	0.010	0.25	9.5	242	280	100
KT4U078-090	KT6U078-090	0.31	7.8	35.4	900	0.010	0.25	10.8	274	280	100
KT4U078-100	KT6U078-100	0.31	7.8	39.4	1000	0.010	0.25	12.0	306	280	100
KT4U078-110	KT6U078-110	0.31	7.8	43.3	1100	0.010	0.25	13.3	338	280	100
KT4U078-120	KT6U078-120	0.31	7.8	47.2	1200	0.010	0.25	14.5	369	280	100
KT4U078-130	KT6U078-130	0.31	7.8	51.2	1300	0.010	0.25	15.8	401	280	100
KT4U078-140	KT6U078-140	0.31	7.8	55.1	1400	0.010	0.25	17.1	433	280	100
KT4U078-150	KT6U078-150	0.31	7.8	59.1	1500	0.010	0.25	18.3	465	280	100

KT Ties – Coated

Part Number	Part Number	Width		Length		Base Material Thickness		Maximum Diameter Single Wrap		Minimum Loop Tensile Strength	Package Quantity	Application Tools
304SS	316SS	In	mm	In	mm	In	mm	In	mm	lbs		
KT4B046-010	KT6B046-010	0.18	4.6	3.9	100	0.010	0.25	0.7	19	140	100	K50289 XE9229 C07569 KS652 or by hand
KT4B046-015	KT6B046-015	0.18	4.6	5.9	150	0.010	0.25	1.4	35	140	100	
KT4B046-020	KT6B046-020	0.18	4.6	7.9	200	0.010	0.25	2.0	52	140	100	
KT4B046-025	KT6B046-025	0.18	4.6	9.8	250	0.010	0.25	2.6	67	140	100	
KT4B046-030	KT6B046-030	0.18	4.6	11.8	300	0.010	0.25	3.3	83	140	100	
KT4B046-035	KT6B046-035	0.18	4.6	13.8	350	0.010	0.25	3.9	99	140	100	
KT4B046-040	KT6B046-040	0.18	4.6	15.7	400	0.010	0.25	4.5	115	140	100	
KT4B046-045	KT6B046-045	0.18	4.6	17.7	450	0.010	0.25	5.2	131	140	100	
KT4B046-050	KT6B046-050	0.18	4.6	19.7	500	0.010	0.25	5.8	147	140	100	
KT4B046-055	KT6B046-055	0.18	4.6	21.7	550	0.010	0.25	6.4	163	140	100	
KT4B046-060	KT6B046-060	0.18	4.6	23.6	600	0.010	0.25	7.0	179	140	100	
KT4B046-065	KT6B046-065	0.18	4.6	25.6	650	0.010	0.25	7.6	194	140	100	
KT4B046-070	KT6B046-070	0.18	4.6	27.6	700	0.010	0.25	8.3	211	140	100	
KT4B046-080	KT6B046-080	0.18	4.6	31.5	800	0.010	0.25	9.5	242	140	100	
KT4B046-090	KT6B046-090	0.18	4.6	35.4	900	0.010	0.25	10.8	274	140	100	
KT4B046-100	KT6B046-100	0.18	4.6	39.4	1000	0.010	0.25	12.0	306	140	100	
KT4B046-110	KT6B046-110	0.18	4.6	43.3	1100	0.010	0.25	13.3	338	140	100	

KT4B046-120	KT6B046-120	0.18	4.6	47.2	1200	0.010	0.25	14.5	369	140	100
KT4B078-010	KT6B078-010	0.31	7.8	3.9	100	0.010	0.25	0.7	19	160	100
KT4B078-015	KT6B078-015	0.31	7.8	5.9	150	0.010	0.25	1.4	35	160	100
KT4B078-020	KT6B078-020	0.31	7.8	7.9	200	0.010	0.25	2.0	52	160	100
KT4B078-025	KT6B078-025	0.31	7.8	9.8	250	0.010	0.25	2.6	67	160	100
KT4B078-030	KT6B078-030	0.31	7.8	11.8	300	0.010	0.25	3.3	83	160	100
KT4B078-035	KT6B078-035	0.31	7.8	13.8	350	0.010	0.25	3.9	99	160	100
KT4B078-040	KT6B078-040	0.31	7.8	15.7	400	0.010	0.25	4.5	115	160	100
KT4B078-045	KT6B078-045	0.31	7.8	17.7	450	0.010	0.25	5.1	131	160	100
KT4B078-050	KT6B078-050	0.31	7.8	19.7	500	0.010	0.25	5.8	147	160	100
KT4B078-055	KT6B078-055	0.31	7.8	21.7	550	0.010	0.25	6.4	163	160	100
KT4B078-060	KT6B078-060	0.31	7.8	23.6	600	0.010	0.25	7.0	179	160	100
KT4B078-065	KT6B078-065	0.31	7.8	25.6	650	0.010	0.25	7.6	194	160	100
KT4B078-070	KT6B078-070	0.31	7.8	27.6	700	0.010	0.25	8.3	211	160	100
KT4B078-080	KT6B078-080	0.31	7.8	31.5	800	0.010	0.25	9.5	242	160	100
KT4B078-090	KT6B078-090	0.31	7.8	35.4	900	0.010	0.25	10.8	274	160	100
KT4B078-100	KT6B078-100	0.31	7.8	39.4	1000	0.010	0.25	12.0	306	160	100
KT4B078-110	KT6B078-110	0.31	7.8	43.3	1100	0.010	0.25	13.3	338	160	100
KT4B078-120	KT6B078-120	0.31	7.8	47.2	1200	0.010	0.25	14.5	369	160	100
KT4B078-130	KT6B078-130	0.31	7.8	51.2	1300	0.010	0.25	15.8	401	160	100

KT4B078-140	KT6B078-140	0.31	7.8	55.1	1400	0.010	0.25	17.1	433	160	100
KT4B078-150	KT6B078-150	0.31	7.8	59.1	1500	0.010	0.25	18.3	465	160	100

*Regional specifications vary, some items may be subject to minimum order quantities or extended lead times

MINI TIE-LOK®

BAND-IT Mini Tie-Lok® ties offer a unique, patented dimple lock with a smooth ID and a low profile. This is a fast, consistent and reliable clamp. Used in many industries from automotive to cable bundling.

- 304 Stainless steel offers very good resistance to mild atmosphere, fresh water and the sun’s UV rays
- When installed with the A92079 Tie-Lok II tool can withstand forces above 250 pounds
- Forms a low profile single wrapped assembly to secure cables, hoses, ID Tags, CV Boots, and filter bags

PRODUCT SPECIFICATIONS

PART NO.	MATERIAL	WIDTH (IN)	LENGTH (IN)	THICKNESS (IN)	MAXIMUM DIAMETER SINGLE WRAP (IN)	MINIMUM LOOP TENSILE STRENGTH (LBS)	PACKAGE QUANTITY
AS2219	304 SS	1/6	7	0.015	1	100	100/Bag
AS2229	304 SS	1/6	10	0.015	2	100	100/Bag
AS2239	304 SS	1/6	16	0.015	4	100	100/Bag
AS2249	304 SS	1/6	22.5	0.015	6	100	100/Bag
AS2259	304 SS	1/6	29	0.015	8	100	100/Bag
AS4219	316 SS	1/6	7	0.015	1	100	100/Bag
AS4229	316 SS	1/6	10	0.015	2	100	100/Bag
AS4239	316 SS	1/6	16	0.015	4	100	100/Bag
AS4249	316 SS	1/6	22.5	0.015	6	100	100/Bag



PART NO.	MATERIAL	WIDTH (IN)	LENGTH (IN)	THICKNESS (IN)	MAXIMUM DIAMETER SINGLE WRAP (IN)	MINIMUM LOOP TENSILE STRENGTH (LBS)	PACKAGE QUANTITY
AS4259	316 SS	1/6	29	0.015	8	100	100/Bag

MULTI-LOK® TIES

Multi-Lok ties offer a high strength plus vibration resistant benefit. This product is a perfect choice for harsh duty or marine environments.

- Self-locking ties
- Two widths – 0.276” (7.01mm) and 0.472” (12.0mm)
- Coated with Nylon 11 or uncoated 316 SS styles available
- Fast, easy application
- Install by hand or with a variety of tools
- Unique high strength multiple locking system

PRODUCT SPECIFICATIONS



COATED PART NO.	UNCOATED PART NO.	MATERIAL	WIDTH (IN)	LENGTH (IN)	THICKNESS (COATED/ UNCOATED) (IN)	MAXIMUM DIAMETER SINGLE WRAP (IN)	MINIMUM LOOP TENSILE STRENGTH (LBS)	PACKAGE QUANTITY
AE6119	AE6019	316 SS	0.276	6	0.018 / 0.011	1.3	250	100/Bag
AE6129	AE6029	316 SS	0.276	9	0.018 / 0.011	2.2	250	100/Bag
AE6139	AE6039	316 SS	0.276	12	0.018 / 0.011	3.2	250	100/Bag
AE6149	AE6049	316 SS	0.276	18	0.018 / 0.011	5.1	250	100/Bag
AE6159	AE6059	316 SS	0.276	24	0.018 / 0.011	7.1	250	100/Bag
AE7119	AE7019	316 SS	0.472	6	0.018 / 0.011	1.3	415	100/Bag
AE7129	AE7029	316 SS	0.472	9	0.018 / 0.011	2.2	415	100/Bag

COATED PART NO.	UNCOATED PART NO.	MATERIAL	WIDTH (IN)	LENGTH (IN)	THICKNESS (COATED/ UNCOATED) (IN)	MAXIMUM DIAMETER SINGLE WRAP (IN)	MINIMUM LOOP TENSILE STRENGTH (LBS)	PACKAGE QUANTITY
AE7139	AE7039	316 SS	0.472	12	0.018 / 0.011	3.2	415	100/Bag
AE7149	AE7049	316 SS	0.472	18	0.018 / 0.011	5.1	415	100/Bag
AE7159	AE7059	316 SS	0.472	24	0.018 / 0.011	7.1	415	100/Bag

REUSABLE AE TIES

One-piece construction with unique buckle designs capable of double wrapping for special strength requirements and reliable installation

- Constructed of 316 Stainless Steel with PPA571 coating
- PPA 571 is resistant to stress cracking, adverse weather conditions, detergents, salt spray and typical airborne pollutants
- Regionally available. May be subject to extended lead times and minimum order quantities.

PRODUCT SPECIFICATIONS



COATED PART NO.	MATERIAL	WIDTH (IN)	LENGTH (IN)	THICKNESS AE COATED (IN)	MAXIMUM DIAMETER SINGLE WRAP (IN)	MINIMUM LOOP TENSILE STRENGTH (LBS)	PACKAGE QUANTITY
AE Ties							
AE1118	316 SS	1/4	6	0.045	1.5	75/300**	100/Bag
AE1128	316 SS	1/4	9	0.045	2.5	75/300**	100/Bag
AE1138	316 SS	1/4	12	0.045	3.4	75/300**	100/Bag
AE1148	316 SS	1/4	18	0.045	5.4	75/300**	100/Bag
AE1158	316 SS	1/4	24	0.045	7.3	75/300**	100/Bag
AE3138	316 SS	3/8	12	0.045	3.4	100/500**	100/Bag
AE3148	316 SS	3/8	18	0.045	5.4	100/500**	100/Bag

COATED PART NO.	MATERIAL	WIDTH (IN)	LENGTH (IN)	THICKNESS AE COATED (IN)	MAXIMUM DIAMETER SINGLEWRAP (IN)	MINIMUM LOOP TENSILE STRENGTH (LBS)	PACKAGE QUANTITY
AE3158	316 SS	3/8	24	0.045	7.3	100/500**	100/Bag
AE3178	316 SS	3/8	36	0.045	11	100/500**	100/Bag

**Material thickness includes coating*

***Single / Double Wrapped*

ULTRA-LOK® CABLE TIES

BAND-IT’s strongest stainless steel cable tie with Ultra-Lok® locking style.

- Smooth ID ties with low profile
- Provides fast, reliable, consistent clamp
- Great for cable bundling

PRODUCT SPECIFICATIONS

PART NO.	MATERIAL	WIDTH (IN)	LENGTH (IN)	THICKNESS (IN)	MAXIMUM DIAMETER SINGLE WRAP (IN)	MINIMUM LOOP TENSILE STRENGTH (LBS)	PACKAGE QUANTITY
AU3029	304 SS	1/4	8	0.015	1.5	400	100/Bag
AU3039	304 SS	1/4	10	0.015	2.5	400	100/Bag
AU3089	304 SS	1/4	24	0.015	7	400	100/Bag



Note: AU2029, AU2039, and AU2089 in 201 SS have been replaced with the above parts in 304 SS.

BAND-FAST® WITH COLOR-IT®

BAND-FAST® is ready to use band, pre-cut and pre-assembled with a clip, buckle or seal. Pre-assembled product gives you an edge over your competition as it saves up to 30% time and labour costs for your large projects. Wherever you traditionally use band and buckle, or have a need for innovative products, BAND-FAST® can do the job faster and with less scrap material!

COLOR-IT® Coatings are available in a variety of colors and types providing superior performance and manufactured with your specific application in mind. Whether you are color-matching decorative light poles, identifying materials, or matching existing hardware on specific projects, COLOR-IT® has the right coating for your project needs. Custom colors are also available. Call for a quote!

PRODUCT SPECIFICATIONS

Valuclip BAND-FAST with COLOR-IT®

PART NUMBER	MATERIAL	WIDTH (IN)	THICKNESS (IN)	LENGTH (IN)	PACKAGE QUANTITY	COLOR
1/2" Valuclip BAND-FAST® with COLOR-IT® – 18" Length						
BFVC-J0825-018-U	201 SS	1/2	0.025	18	100/Box	Stainless
BFVC-J0825-018-P000	201 SS	1/2	0.025	18	100/Box	White
BFVC-J0825-018-P100	201 SS	1/2	0.025	18	100/Box	Red
BFVC-J0825-018-P102	201 SS	1/2	0.025	18	100/Box	Pink
BFVC-J0825-018-P200	201 SS	1/2	0.025	18	100/Box	Orange
BFVC-J0825-018-P300	201 SS	1/2	0.025	18	100/Box	Yellow
BFVC-J0825-018-P302	201 SS	1/2	0.025	18	100/Box	Tan
BFVC-J0825-018-P351	201 SS	1/2	0.025	18	100/Box	Gold
BFVC-J0825-018-P400	201 SS	1/2	0.025	18	100/Box	Green



PART NUMBER	MATERIAL	WIDTH (IN)	THICKNESS (IN)	LENGTH (IN)	PACKAGE QUANTITY	COLOR
BFVC-J0825-018-P406	201 SS	1/2	0.025	18	100/Box	Seafoam Green
BFVC-J0825-018-P500	201 SS	1/2	0.025	18	100/Box	Blue
BFVC-J0825-018-P503	201 SS	1/2	0.025	18	100/Box	Turquoise Blue
BFVC-J0825-018-P550	201 SS	1/2	0.025	18	100/Box	Light Blue
BFVC-J0825-018-P600	201 SS	1/2	0.025	18	100/Box	Purple
BFVC-J0825-018-P700	201 SS	1/2	0.025	18	100/Box	Gray
BFVC-J0825-018-P800	201 SS	1/2	0.025	18	100/Box	Brown
BFVC-J0825-018-P900	201 SS	1/2	0.025	18	100/Box	Black

**Black clips available. To request a black clip, add "L" to end of part number in spec table.*

PART NUMBER	MATERIAL	WIDTH (IN)	THICKNESS (IN)	LENGTH (IN)	PACKAGE QUANTITY	COLOR
1/2" Valuclick BAND-FAST® with COLOR-IT®- 24" Length						
BFVC-J0825-024-U	201 SS	1/2	0.025	24	100/Box	Stainless
BFVC-J0825-024-P000	201 SS	1/2	0.025	24	100/Box	White
BFVC-J0825-024-P100	201 SS	1/2	0.025	24	100/Box	Red
BFVC-J0825-024-P102	201 SS	1/2	0.025	24	100/Box	Pink
BFVC-J0825-024-P200	201 SS	1/2	0.025	24	100/Box	Orange
BFVC-J0825-024-P300	201 SS	1/2	0.025	24	100/Box	Yellow
BFVC-J0825-024-P302	201 SS	1/2	0.025	24	100/Box	Tan

PART NUMBER	MATERIAL	WIDTH (IN)	THICKNESS (IN)	LENGTH (IN)	PACKAGE QUANTITY	COLOR
BFVC-J0825-024-P351	201 SS	1/2	0.025	24	100/Box	Gold
BFVC-J0825-024-P400	201 SS	1/2	0.025	24	100/Box	Green
BFVC-J0825-024-P406	201 SS	1/2	0.025	24	100/Box	Seafoam Green
BFVC-J0825-024-P500	201 SS	1/2	0.025	24	100/Box	Blue
BFVC-J0825-024-P550	201 SS	1/2	0.025	24	100/Box	Light Blue
BFVC-J0825-024-P503	201 SS	1/2	0.025	24	100/Box	Turquoise Blue
BFVC-J0825-024-P600	201 SS	1/2	0.025	24	100/Box	Purple
BFVC-J0825-024-P700	201 SS	1/2	0.025	24	100/Box	Gray
BFVC-J0825-024-P800	201 SS	1/2	0.025	24	100/Box	Brown
BFVC-J0825-024-P900	201 SS	1/2	0.025	24	100/Box	Black

**Black clips available. To request a black clip, add "L" to end of part number in spec table.*

PART NUMBER	MATERIAL	WIDTH (IN)	THICKNESS (IN)	LENGTH (IN)	PACKAGE QUANTITY	COLOR
1/2" Valuclick BAND-FAST® with COLOR-IT®– 30" Length						
BFVC-J0825-030-U	201 SS	1/2	0.025	30	100/Box	Stainless
BFVC-J0825-030-P000	201 SS	1/2	0.025	30	100/Box	White
BFVC-J0825-030-P100	201 SS	1/2	0.025	30	100/Box	Red
BFVC-J0825-030-P102	201 SS	1/2	0.025	30	100/Box	Pink
BFVC-J0825-030-P200	201 SS	1/2	0.025	30	100/Box	Orange

PART NUMBER	MATERIAL	WIDTH (IN)	THICKNESS (IN)	LENGTH (IN)	PACKAGE QUANTITY	COLOR
BFVC-J0825-030-P300	201 SS	1/2	0.025	30	100/Box	Yellow
BFVC-J0825-030-P302	201 SS	1/2	0.025	30	100/Box	Tan
BFVC-J0825-030-P351	201 SS	1/2	0.025	30	100/Box	Gold
BFVC-J0825-030-P400	201 SS	1/2	0.025	30	100/Box	Green
BFVC-J0825-030-P406	201 SS	1/2	0.025	30	100/Box	Seafoam Green
BFVC-J0825-030-P500	201 SS	1/2	0.025	30	100/Box	Blue
BFVC-J0825-030-P550	201 SS	1/2	0.025	30	100/Box	Light Blue
BFVC-J0825-030-P503	201 SS	1/2	0.025	30	100/Box	Turquoise Blue
BFVC-J0825-030-P600	201 SS	1/2	0.025	30	100/Box	Purple
BFVC-J0825-030-P700	201 SS	1/2	0.025	30	100/Box	Gray
BFVC-J0825-030-P800	201 SS	1/2	0.025	30	100/Box	Brown
BFVC-J0825-030-P900	201 SS	1/2	0.025	30	100/Box	Black

**Black clips available. To request a black clip, add "L" to end of part number in spec table.*

Center Punch BAND-FAST with COLOR-IT®

PART NUMBER	MATERIAL	WIDTH (IN)	THICKNESS (IN)	LENGTH (IN)	PACKAGE QUANTITY	COLOR
5/8" Center Punch BAND-FAST® with COLOR-IT®— 18" Length						
BFPC-J1025-018-U	201 SS	5/8	0.025	18	100/Box	Stainless

PART NUMBER	MATERIAL	WIDTH (IN)	THICKNESS (IN)	LENGTH (IN)	PACKAGE QUANTITY	COLOR
BFPC-J1025-018-P000	201 SS	5/8	0.025	18	100/Box	White
BFPC-J1025-018-P100	201 SS	5/8	0.025	18	100/Box	Red
BFPC-J1025-018-P102	201 SS	5/8	0.025	18	100/Box	Pink
BFPC-J1025-018-P200	201 SS	5/8	0.025	18	100/Box	Orange
BFPC-J1025-018-P300	201 SS	5/8	0.025	18	100/Box	Yellow
BFPC-J1025-018-P302	201 SS	5/8	0.025	18	100/Box	Tan
BFPC-J1025-018-P351	201 SS	5/8	0.025	18	100/Box	Gold
BFPC-J1025-018-P400	201 SS	5/8	0.025	18	100/Box	Green
BFPC-J1025-018-P406	201 SS	5/8	0.025	18	100/Box	Seafoam Green
BFPC-J1025-018-P500	201 SS	5/8	0.025	18	100/Box	Blue
BFPC-J1025-018-P550	201 SS	5/8	0.025	18	100/Box	Light Blue
BFPC-J1025-018-P503	201 SS	5/8	0.025	18	100/Box	Turquoise Blue
BFPC-J1025-018-P600	201 SS	5/8	0.025	18	100/Box	Purple
BFPC-J1025-018-P700	201 SS	5/8	0.025	18	100/Box	Gray
BFPC-J1025-018-P800	201 SS	5/8	0.025	18	100/Box	Brown
BFPC-J1025-018-P900	201 SS	5/8	0.025	18	100/Box	Black

**Black center punch buckle available. To request a black center punch buckle, add "L" to end of part number in spec table.*

PART NUMBER	MATERIAL	WIDTH (IN)	THICKNESS (IN)	LENGTH (IN)	PACKAGE QUANTITY	COLOR
-------------	----------	------------	----------------	-------------	------------------	-------

5/8" Center Punch BAND-FAST® with COLOR-IT®— 24" Length

BFPC-J1025-024-U	201 SS	5/8	0.025	24	100/Box	Stainless
BFPC-J1025-024-P000	201 SS	5/8	0.025	24	100/Box	White
BFPC-J1025-024-P100	201 SS	5/8	0.025	24	100/Box	Red
BFPC-J1025-024-P102	201 SS	5/8	0.025	24	100/Box	Pink
BFPC-J1025-024-P200	201 SS	5/8	0.025	24	100/Box	Orange
BFPC-J1025-024-P300	201 SS	5/8	0.025	24	100/Box	Yellow
BFPC-J1025-024-P302	201 SS	5/8	0.025	24	100/Box	Tan
BFPC-J1025-024-P351	201 SS	5/8	0.025	24	100/Box	Gold
BFPC-J1025-024-P400	201 SS	5/8	0.025	24	100/Box	Green
BFPC-J1025-024-P406	201 SS	5/8	0.025	24	100/Box	Seafoam Green
BFPC-J1025-024-P500	201 SS	5/8	0.025	24	100/Box	Blue
BFPC-J1025-024-P550	201 SS	5/8	0.025	24	100/Box	Light Blue
BFPC-J1025-024-P503	201 SS	5/8	0.025	24	100/Box	Turquoise Blue
BFPC-J1025-024-P600	201 SS	5/8	0.025	24	100/Box	Purple
BFPC-J1025-024-P700	201 SS	5/8	0.025	24	100/Box	Gray
BFPC-J1025-024-P800	201 SS	5/8	0.025	24	100/Box	Brown
BFPC-J1025-024-P900	201 SS	5/8	0.025	24	100/Box	Black

**Black center punch buckle available. To request a black center punch buckle, add "L" to end of part number in spec table.*

PART NUMBER	MATERIAL	WIDTH (IN)	THICKNESS (IN)	LENGTH (IN)	PACKAGE QUANTITY	COLOR
5/8" Center Punch BAND-FAST® with COLOR-IT®- 30" Length						
BFPC-J1025-030-U	201 SS	5/8	0.025	30	100/Box	Stainless
BFPC-J1025-030-P000	201 SS	5/8	0.025	30	100/Box	White
BFPC-J1025-030-P100	201 SS	5/8	0.025	30	100/Box	Red
BFPC-J1025-030-P102	201 SS	5/8	0.025	30	100/Box	Pink
BFPC-J1025-030-P200	201 SS	5/8	0.025	30	100/Box	Orange
BFPC-J1025-030-P300	201 SS	5/8	0.025	30	100/Box	Yellow
BFPC-J1025-030-P302	201 SS	5/8	0.025	30	100/Box	Tan
BFPC-J1025-030-P351	201 SS	5/8	0.025	30	100/Box	Gold
BFPC-J1025-030-P400	201 SS	5/8	0.025	30	100/Box	Green
BFPC-J1025-030-P406	201 SS	5/8	0.025	30	100/Box	Seafoam Green
BFPC-J1025-030-P500	201 SS	5/8	0.025	30	100/Box	Blue
BFPC-J1025-030-P550	201 SS	5/8	0.025	30	100/Box	Light Blue
BFPC-J1025-030-P503	201 SS	5/8	0.025	30	100/Box	Turquoise Blue
BFPC-J1025-030-P600	201 SS	5/8	0.025	30	100/Box	Purple
BFPC-J1025-030-P700	201 SS	5/8	0.025	30	100/Box	Gray
BFPC-J1025-030-P800	201 SS	5/8	0.025	30	100/Box	Brown
BFPC-J1025-030-P900	201 SS	5/8	0.025	30	100/Box	Black

**Black center punch buckle available. To request a black center punch buckle, add "L" to end of part number in spec table.*

EASY CARRIERS

EASY Carriers are used to attach Easy Read characters to any 1/4" tie. Available in black Nylon 11 coated Stainless Steel only.

PRODUCT SPECIFICATIONS



PART NO.	MATERIAL	DESCRIPTION	WIDTH (IN)	LENGTH (IN)	WEIGHT (LBS)	PACKAGE QUANTITY
AE0439	316 SS	EASY Carrier 6	0.3	3.6	0.8	100/Bag
AE0449	316 SS	EASY Carrier 10	0.3	5.1	1.3	100/Bag
AE0459	316 SS	EASY Carrier 16	0.3	7.3	1.5	100/Bag

EASY READ CHARACTERS

EASY READ characters slide onto any 1/4" - 3/8" tie.

Regionally available. May be subject to extended lead times and minimum order quantities.

- BAND-IT EASY READ letters, numbers and are symbols made from type 316 SS
- Slide directly onto Easy Carriers or cable ties to create a self-contained wrap tag
- Easy to read in dim light and inaccessible places
- Characters sold individually in bags of 100 pcs
- AE0609-100 Easy Read Kit comes in a convenient carrying case and contains 100 of each character and carriers

PRODUCT SPECIFICATIONS



PART NO.	MATERIAL	DESCRIPTION	PACKAGE QUANTITY	WEIGHT (LBS)
Easy Read Kit				

PART NO.	MATERIAL	DESCRIPTION	PACKAGE QUANTITY	WEIGHT (LBS)
AE0609-100	316 SS	EASY Read Kit	1	19.5
Easy Read Characters				
AE0109	316 SS	EASY A	100/Bag	0.3
AE0119	316 SS	EASY B	100/Bag	0.3
AE0129	316 SS	EASY C	100/Bag	0.3
AE0139	316 SS	EASY D	100/Bag	0.3
AE0149	316 SS	EASY E	100/Bag	0.3
AE0159	316 SS	EASY F	100/Bag	0.3
AE0169	316 SS	EASY G	100/Bag	0.3
AE0179	316 SS	EASY H	100/Bag	0.3
AE0189	316 SS	EASY I, 1	100/Bag	0.3
AE0199	316 SS	EASY J	100/Bag	0.3
AE0209	316 SS	EASY K	100/Bag	0.3
AE0219	316 SS	EASY L, 7	100/Bag	0.3
AE0229	316 SS	EASY M, W	100/Bag	0.3
AE0239	316 SS	EASY N	100/Bag	0.3
AE0249	316 SS	EASY O	100/Bag	0.3
AE0259	316 SS	EASY P	100/Bag	0.3
AE0269	316 SS	EASY Q	100/Bag	0.3
AE0279	316 SS	EASY R	100/Bag	0.3
AE0289	316 SS	EASY S	100/Bag	0.3
AE0299	316 SS	EASY T	100/Bag	0.3
AE0309	316 SS	EASY U	100/Bag	0.3
AE0319	316 SS	EASY V	100/Bag	0.3
AE0329	316 SS	EASY X	100/Bag	0.3
AE0339	316 SS	EASY Y	100/Bag	0.3
AE0349	316 SS	EASY Z	100/Bag	0.3
AE0379	316 SS	EASY 2	100/Bag	0.3
AE0389	316 SS	EASY 3	100/Bag	0.3
AE0399	316 SS	EASY 4	100/Bag	0.3
AE0409	316 SS	EASY 5	100/Bag	0.3
AE0419	316 SS	EASY 6, 9	100/Bag	0.3
AE0429	316 SS	EASY 8	100/Bag	0.3
AE0359	316 SS	EASY Minus/Hyphen	100/Bag	0.3

PART NO.	MATERIAL	DESCRIPTION	PACKAGE QUANTITY	WEIGHT (LBS)
AE0369	316 SS	EASY Blank	100/Bag	0.3
AE0469	316 SS	EASY Plus +	100/Bag	0.3
AE0479	316 SS	EASY Earth	100/Bag	0.3
AE0489	316 SS	EASY Sine ~	100/Bag	0.3
AE0499	316 SS	EASY Slash /	100/Bag	0.3

ID TAGS

Print your own tag on 304 or 316 stainless steel and apply with Tie-Lok® ties.

- Attaches to poles, cables, supports, etc with Tie-Lok Ties

PRODUCT SPECIFICATIONS



PART NO.	MATERIAL	HEIGHT (IN)	LENGTH (IN)	THICKNESS (IN)	WEIGHT (LBS)	PACKAGE QUANTITY
ID Tags						
ID1009	304 SS	0.75	2	0.015	0.5	100/Box
ID1019	304 SS	1.5	2.5	0.015	1.2	100/Box
ID1029	304 SS	0.75	3.5	0.015	0.8	100/Box
ID4409	316 SS	0.75	2	0.015	0.5	100/Box
ID4419	316 SS	1.5	2.5	0.015	1.2	100/Box
ID4429	316 SS	0.75	3.5	0.015	0.8	100/Box

IDENTIFICATION KIT

An assortment of blank ID Tags to use with the ID Tagging System. Also includes various Tie-Lok® ties and Tie-Lok® tool for tag fastening.

Kit Contains:

- 1-A92079: Tie-Lok® II Tool
- 1-ID1029: ID Tag – 304 Stainless Steel 0.75" x 3.5"
- 1-ID1019: ID Tag – 304 Stainless Steel 1.50" x 2.5"
- 2-ID1009: ID Tag – 304 Stainless Steel 0.75" x 2.0"
- 1-AS2119: Tie-Lok® Tie – 1/4" x 10"
- 2-AS2129: Tie-Lok® Tie – 1/4" x 16.5"
- 1-AS2139: Tie-Lok® Tie – 1/4" x 22.5"

PRODUCT SPECIFICATIONS

PART NO.	MATERIAL	HEIGHT (IN)	LENGTH (IN)	THICKNESS (IN)	WEIGHT (LBS)	PACKAGE QUANTITY
ID3009	SS	Kit Contains: 1-A92079, 2-ID1029, 1-ID1019, 1-ID1009, 1-AS2119, 2-AS2129, 1-AS2139			22.7	each



STAINLESS STEEL TAPE EMBOSSEING SYSTEM

With the portable tape embossing tool and a roll of stainless steel tape, you can quickly and easily produce ID tags with 3/16" letter size which can be attached with your choice of BAND-IT® ties. Replacement Rolls: ID4059 - 1/2" X 21' - 2 pack.



PRODUCT SPECIFICATIONS

PART NO.	DESCRIPTION	WEIGHT (LBS)	PACKAGE QUANTITY
ID4002	SS Tape Embossing Tool Includes 2 rolls of SS tape.	2.6	each
ID4059	304 SS Tape Roll for Embossing Tool, 1/2" x 21' x .005"	0.2	each

2 BOLT BRACK-IT

Used to mount traffic signs, security devices, and enclosures. Withstands stress and wind vibration with specialty designed reinforcement ribs.

- Fully threaded to solidly anchor attachment bolts.
- Hex head bolts with metal and fiber washer, no nuts required.
- Applied with BAND-IT® Band and Buckles, BAND-FAST®, VALU-STRAP™, VALU-STRAP Plus™, or Ultra-Lok® Systems.

PRODUCT SPECIFICATIONS



PART #	DESCRIPTION	THICKNESS (IN)	PACKAGE QUANTITY	PACKAGE WEIGHT (LBS)
D00889	2 bolt straight leg SS Brack-It with SS Bolt, washer, and fibre washer. 3/4" slot	0.07	50 / Box	9.2
D00999	2 bolt straight leg SS Brack-It only. 3/4" slot	0.07	50 / box	7.1

BAND-IT BOLT/CLAMPS

Aluminium extruded housing with plated carriage bolt, nut and washer. Used with Giant Band for large diameter applications such as pole and tower mounting.

PRODUCT SPECIFICATIONS



PART #	DESCRIPTION	PACKAGE QUANTITY	PACKAGE WEIGHT (LBS)
D50089	Bolt/Clamp. Includes a 3/8 – 16 x 6.0" carriage bolt. Slot will accommodate 3/4" width Giant Band.	50/Box	23.7
D50489	Bolt/Clamp. Includes a 5/8 – 11 x 8.0" carriage bolt. Slot will accommodate 1 1/4" width Giant Band.	25/Box	33

BOLTS AND WASHERS FOR BRACK-ITS

Used to mount traffic signs, security devices and enclosures. Withstands stress and wind vibration with specialty designed reinforcement ribs.

- Fully threaded to solidly anchor attachment bolts.
- Hex head bolts with metal and fibre washer, no nuts required.
- Applied with BAND-IT® Band and Buckles, BAND-FAST®, VALU-STRAP™, VALU-STRAP Plus™, or Ultra-Lok® Systems.

PRODUCT SPECIFICATIONS


PART #	DESCRIPTION	PACKAGE QUANTITY	PACKAGE WEIGHT (LBS)
D00299	5/16" – 18 x 3/4" Hex Head SS Bolt, washer and fiber washer	50/bag	1.3



CHANNEL EXTRUSION

For mounting and stiffening any size sign. Channel Extrusions have identical configurations allowing the use of mounting hardware with any extrusion.

PRODUCT SPECIFICATIONS



PART NO.	MATERIAL	DESCRIPTION	PACKAGE QUANTITY	WEIGHT (LBS)
SX0073-20	Aluminum	Medium Channel Extrusion	20/Box	70
SX0130-6	Aluminum	Large Channel Extrusion	6/Box	35.4
SX0090-8	Aluminum	Large Corner Angle Channel Extrusion	8/Box	46.9

L-MOUNT RIGHT ANGLE BRACK-IT

L-Mount right angle Brack-It includes two bolt holes suitable for 5/16" or 1/4" bolts. Solid anchor for signs mounted at right angle. Does not include bolts.

- Fully threaded to solidly anchor attachment bolts.
- Hex head bolts with metal and fibre washer, no nuts required.
- Applied with BAND-IT® Band and Buckles, BAND-FAST®, VALU-STRAP™, VALU-STRAP Plus™, or Ultra-Lok® Systems.

PRODUCT SPECIFICATIONS



PART #	DESCRIPTION	PACKAGE QUANTITY	PACKAGE WEIGHT (LBS)
D00799	L-Mount right angle Brack-It, 0.070" thick SS, includes two bolt holes suitable for 5/16" or 1/4" bolts. Solid anchor for signs mounted at right angle. Does not include bolts.	50 / Box	4.4

MINI BRACK-IT

Used to mount traffic signs, security devices, and enclosures. Withstands stress and wind vibration with specialty designed reinforcement ribs.

- Fully threaded to solidly anchor attachment bolts.
- Hex head bolts with metal and fibre washer, no nuts required.
- Applied with BAND-IT® Band and Buckles, BAND-FAST®, VALU-STRAP™, VALU-STRAP Plus™, or Ultra-Lok® Systems.

PRODUCT SPECIFICATIONS



PART #	DESCRIPTION	THICKNESS (IN)	PACKAGE QUANTITY	PACKAGE WEIGHT (LBS)
D31099	Flared leg mini Brack-it, SS with SS bolt and fibre washer. 1/2" slot	0.05	50 / Box	3
D31599	Straight leg mini Brack-it, SS with SS bolt and fibre washer. 1/2" slot	0.05	50 / Box	3
D30288	5/16 24 x 1/2" Hex head SS bolt, washer and fibre washer for mini Brack-it	–	50 / Box	1

MOUNTING PLATES

Aluminium extruded plate with 5/8 – 11 x 2" 50.8) plated bolt and nut.

- Available in two sizes
- Band slot width 1.375" to accommodate a single or double wrap of our 1 1/4" wide x .044 thick Giant Band

PRODUCT SPECIFICATIONS

PART #	DESCRIPTION	PACKAGE QUANTITY	PACKAGE WEIGHT (LBS)
D51089	Mounting Plate, Aluminium, 1-1/2" (38.1 mm) x 4-3/4" (120.7mm) with a 2" long 5/8" plated bolt.	25/Box	15
D51289	Mounting Plate, Aluminium, 1-1/2" x 5-1/4" with a 2" long 5/8" plated bolt.	25/Box	21.3
D51389	Mounting Plate, Aluminium, 1-1/2" x 5-1/4" with a 3" long 5/8" plated bolt.	25/Box	21.3



SCRU-SEAL ADJUSTABLE CLAMPS

BAND-IT® Scru-Seal Clamps feature a rack and pinion system allowing the user to make a clamp in any size. Kit offers complete flexibility for use in almost any application. Form clamps of any diameter from continuous roll of band and tension using only a screwdriver.

- A rack and pinion system used with band to create any size clamp
- Components separately packaged: rack and housing and band for flexibility
- Stainless steel offers very good resistance to mild atmosphere, fresh water and the sun's UV rays
- An adjustable worm drive / screwdriver clamp can be made with any band cutter and a screw driver
- Can be retensioned at any time

PRODUCT SPECIFICATIONS

PART NO.	MATERIAL	DESCRIPTION	WEIGHT (LBS)	PACKAGE QUANTITY
Scru-Seal Clamping System				
M21199	SS	10 Scru-Seal racks and 10 Housings	0.7	10/box
C19199	SS	VALU-STRAP™ Plus Band, 3/8" x .020" x 100'	2.7	100'/roll



PARTNO.	MATERIAL	DESCRIPTION	WEIGHT (LBS)	PACKAGE QUANTITY
Scru-Seal Kits				
M21099	SS	Scru-Seal Kit includes: 25 Scru-Seal racks, 25 housings, VALU-STRAP™ Plus Band 3/8" x 0.020" x 100'	4.3	each
M21899	SS	Each Clamp Pak includes: 3 Scru-Seal racks, 3 housings, VALU-STRAP™ Plus Band 3/8"x 0.020" x 10'	5	10 paks/box
Scru-Band Clamping Systems				
M15599	SS	Scru-Band Housing, 301 SS-Screw 410SS	0.7	25/box
M15199	SS	Scru-Band, 430SS 3/8" x .025"	3.4	100'/roll

SIGNAL MOUNTS

- Attach to a pole with 3/4" Ultra-Lok® , BAND-FAST® or BAND-IT® Band
- Radius of standard signal mount accommodates a large range of pole diameters
- Narrow Back Signal Mount can be used on small diameter poles or for mounting on poles with flat surfaces

PRODUCT SPECIFICATIONS

PART #	DESCRIPTION	PACKAGE QUANTITY	PACKAGE WEIGHT (LBS)
D04099	Signal Mount, 1-1/2" NPT	25/Box	19.4



SINGLE BOLT CLIP – ROUND

A single bolt, Anti-rotational Clip for round posts in 304 stainless steel. Supplied with 1 x No.8 Sq. Hd. Bolt. Insert foot into channel and twist through 90 degrees. The other end is secured by the bolt. Internal pips ensure anti rotation.

- Fits all sizes of BAND-IT channel
- Pack quantity 100

PRODUCT SPECIFICATIONS

Not available in the US.




CAT. NO.	DESCRIPTION	POLE DIA. (IN)	WEIGHT (LBS)
BSARC089	Supplied with 1 x No.8 Sq. Hd. Bolt Insert foot into channel and twist through 90 degrees. The other end is secured by the bolt.	3 1/2	16.7
BSARC114	Fits all sizes of Band-it channel. Internal pips ensure anti rotation	4 1/2	20.2

SINGLE BOLT FLARED LEG BRACK-IT

Used to mount traffic signs, security devices, and enclosures. Reinforced rib design provides additional strength to resist effects of stress, wind and vibration. Industry standard for all round poles greater than 3" diameter

- Includes a stainless bolt, nylon washer and 5/16-18 x 3/4" stainless steel hex head bolt with metal and fibre washer, no nuts required
- 3/4" wide band slot will allow a single or a double wrap of BAND-IT band
- Brack-it assembly can be reused
- Fully threaded to solidly anchor attachment bolts
- Applied with BAND-IT® Band and Buckles, BAND-FAST®, VALU-STRAP™, VALU-STRAP Plus™, or Ultra-Lok® Systems

PRODUCT SPECIFICATIONS



PART #	DESCRIPTION	THICKNESS (IN)	PACKAGE QUANTITY	PACKAGE WEIGHT (LBS)
D02189	Single bolt flared leg SS Brack-It with SS bolt, washer and fibre washer. 3/4" slot	0.07	50 / Box	7
D02299	Single bolt flared leg SS Brack-It only. 3/4" slot	0.07	50 / Box	5.5

SINGLE BOLT STRAIGHT LEG BRACK-IT

Reinforced rib design provides additional strength to resist effects of stress, wind and vibration. Industry standard for pole diameters greater than 14", square poles and wooden poles larger than 8" diameter.

- Includes a stainless bolt, nylon washer and 5/16-18 x 3/4" stainless steel hex head bolt with metal and fibre washer, no nuts required
- 3/4" wide band slot will allow a single or a double wrap of BAND-IT band
- Brack-it assembly can be reused
- Fully threaded to solidly anchor attachment bolts
- Used to mount traffic signs, security devices, and enclosures
- Applied with BAND-IT® Band and Buckles, BAND-FAST®, VALU-STRAP™, VALU-STRAP Plus™, or Ultra-Lok® Systems.

PRODUCT SPECIFICATIONS



PART #	DESCRIPTION	THICKNESS (IN)	PACKAGE QUANTITY	PACKAGE WEIGHT (LBS)
D00189	Single bolt straight leg SS with SS bolt, washer and fibre washer. 3/4" slot	0.07	50 / Box	7
D00499	Single bolt straight leg SS Brack-It only. 3/4" slot	0.07	50 / Box	5.6

UNIVERSAL CHANNEL CLAMP

Universal Channel Clamp is recognized by sign fabricators as a quicker, easier and cost effective method to mount all sizes of signs to any size or shape of pole.

- Universal Channel Clamp is compatible with all Channel Extrusions
- During installation, the assembly becomes fully adjustable to any size or style sign post when used with BAND-IT® Band and Buckle or Ultra-Lok® Free End System
- Package Quantity 100

PRODUCT SPECIFICATIONS

PART NO.	MATERIAL	DESCRIPTION	PACKAGE QUANTITY	WEIGHT (LBS)
Channel Clamp				
SX0220-100	SS	Universal Channel Clamp	100/Box	



VALMOUNT BRACK-IT

Availability varies by region. May be available by special order subject to extended lead times and minimum order quantities. Contact a BAND-IT Account Representative for more information.

PRODUCT SPECIFICATIONS

	LENGTH (IN)	SLOT WIDTH (IN)	PACKAGE QUANTITY	BRACKET WIDTH (IN)	BAND WIDTH (IN)
D02599	5.6	0.375	50	1.5	0.75
D02699	3.6	0.375	50	1.5	0.75



TIE-LOK® PREFORMED TIES / UNIVERSAL CLAMP

The Tie-Lok Preformed tie is a cost-effective single wrap, preformed, smooth ID clamp. Primarily used for securing hose sleeving, the clamp can be installed with a A92079 hand tool or the IT-1000 pneumatic powered production tool.

The Tie-Lok Preformed Tie was previously referred to as the Universal Clamp and is not recommended for clamping hose fittings. Also available in bulk packaging.

PRODUCT SPECIFICATIONS



PART NUMBER	MATERIAL	WIDTH (IN)	THICKNESS (IN)	INSIDE DIAMETER (IN)	PACKAGE QUANTITY	PACKAGE WEIGHT (LBS)
JU3568	304 SS	1/4	0.015	3	100/Box	2.2

**BAND-IT reserves the right to substitute material with equal or better corrosion resistance and/or mechanical specifications.*

Not recommended for industrial hose clamping applications.

Available in bulk packaging. Minimum order of 20 boxes applies.

ULTRA-LOK® CLAMPS

Designed for quick installation, highest clamping force and gap-free inside diameter. The best choice for demanding applications!

- Strongest band clamping system available
- Double wrapped 201SS for superior strength
- Unique lock formed under full tension maximizes tightness
- Thicker buckle is 2-3 times stronger than other preformed clamps
- Smooth inside diameter designed to eliminate leak paths
- Buckle hood protects lock from snags



A91079: MINI TIE-LOK® TOOL

For applying 0.177" wide smooth ID Mini Tie-Lok® ties for cable bundling, hose bundling and identification tagging. Forms unique dimple lock with a strong locking force and cuts off the excess band flush with top of buckle so the completed lock is smooth and not sharp.

- Forms dimple lock with a strong locking force in excess of 100 pounds (45 Kg)
- Adjustable controlled tension with repeatable results
- Easy to use, lightweight, compact design



A92079: TIE-LOK II® TOOL

Applies 1/4" wide smooth ID Tie-Lok® ties used in cable bundling, hose bundling, CV boot installation and identification tagging. Locks tie with the patented Tie-Lok® and cuts off excess band flush with top of buckle so the completed lock is smooth and not sharp.

- Forms dimple lock with a strong locking force in excess of 250 pounds (130 Kg)
- Adjustable controlled tension with repeatable results
- Easy to use, lightweight, compact design"



A94079: 1/4" ULTRA-LOK® TOOL

Applies 1/4" Ultra-Lok® ties. Locks tie with patented Ultra-Lok cut-off for increased loop tensile strength. Tool will tension clamp up to 400lbs of loop tensile strength.

- Commonly used in cable bundling applications



AE2009: CABLE TIE TENSIONER

Used for tensioning BAND-IT® cable ties. Use with: BAND-IT Ties



C00169: STANDARD BANDING TOOL

BAND-IT's standard tool for use on band widths of 1/4" to 3/4" (.015" – .030" thickness). Drop forged tool with built in cutter, spring loaded gripper lever improves ease of use. For use on BAND-FAST products and any band width from 1/4" to 3/4".

Replacement Parts:

- C02499 – Slide Block Assembly
- C05887 – Kit, Cutter Bar Assembly
- C00689 – Kit, Tension Handle, Bearing and Screw



C00269: JUNIOR® PREFORMED CLAMP TOOL

Use to apply Jr.® Preformed clamps and BAND-IT Jr.® Smooth ID Clamps. Tool performs best when used in a vice.

- C00689 – Tension Handle and Screw Kit
- J93099 – Cutter Blade Kit



C00369: HEAVY DUTY BANDING TOOL

A heavy duty version of the C00169: Standard Banding Tool tool. Primarily designed for thicker materials and is not recommended for band widths 0.015" or 0.020". This tool can be used for 0.044" X 3/4" wide Giant Band. Tool will tension beyond the limits of the 3300 lbs of force to yield 3/4" wide 201SS Giant Band.

Replacement Parts:

- C04799 – Spin Grip, External Retaining Ring, Tension Handle Bushing, Tension Handle, Set Screw, and Thrust Bearing
- C06799 – Tension Screw 5/8", Eccentric Lever Pivot Pin, Gripper Spring, Band Gripper, and Slide Block
- C05887 – Cutter Bar Handle, Vinyl Grip, Set Screw, and Cutter Bar



C07569: BANTAM TOOL

Compact, lightweight, ratchet action tool with built in cutter. Use with Valustrap, BAND-IT Ties, PPA coated band, and BAND-FAST products.

(Listed as Part Number C07599 outside the United States)

- 3 way handle adjusts for one or two-handed tensioning
- Zinc plated for corrosion resistance
- Useful in tight areas with minimal access
- Designed for easy loading and removing of material
- Use with coated and uncoated BAND-IT® ties or coated band up to 3/4" (19mm) wide and up to 0.025" (0.63mm) thick.


Related Application: Sign Hanging and Pole Attachment: C07569 Bantam Tool: Lightweight for Field Installations [PDF]



C08569: BANTAM STRAPPING TOOL

Light duty ratchet tool designed for palletizing and packaging. Similar to the C07569.

- Use with coated and uncoated BAND-IT® ties or Coated Band up to 3/4" (19mm) wide and up to 0.025" (0.63mm) thick.



C40099: RACHET TOOL

Designed for the band and buckle systems excelling in palletizing and general banding. This tool works best on coated or painted band because of its gripping mechanism.



CP4000-D: CENTER PUNCH CORDLESS TOOL

BAND-IT's new heavy-duty tool offers consistent max clamping force for reliable clamp installation anywhere in the shop or in the field. Built on the proven 4000-D platform for easy and intuitive use.

Compatible with BAND-IT 5/8" Center Punch Clamps in 201 SS or Galvanized as well as Center Punch Band Fast with Color-It.

- Integrated cutoff handle reduces operator fatigue from repeated motion
- Powered by a 5.2AH Lithium Ion battery – Install up to 400 clamps with a single charge (battery life varies by application and clamp type)
- Tool weighs just 8.34 lbs. for easy portability and field use
- Includes spare battery, charger, and reusable cardboard case.

Part of the 4000-D Tool Family

- Interchangeable with your current UL head
- Easy to learn, easy to use
- Consistent, repeatable tensioning

Other Parts

Center Punch Head Only – Part Number CP1000

Hard Carrying Case – Part Number C26991



DS1099: NICOPRESS OIL WELL HAND TOOL

Engineered for field conditions, Nicopress toggle-action tools are manufactured from alloyed forged steel with specially hardened working surfaces. Tools are designed to create maximum metal flow of the splicing sleeve around the wire or conductor. This results in splices that are strong and reliable.

Use with:

- Nicopress Sleeve Groove Types J, P, X



G40269: GIANT BANDING TOOL

The G40269 is the strongest BAND-IT hand tool. This tool is designed for use with $\frac{3}{4}$ ", 1", 1- $\frac{1}{4}$ " width X .044" thick Giant Band & Buckle. Tool will tension beyond the limits of the 5500 lbs of force to yield 201 Stainless Steel Giant Band material.

Replacement Parts:

- G42487 – Slide Block Assembly
- G42087 – Tension Handle Assembly
- G42287 – Cutter Bar Assembly



ICS SERIES TOOL

The iCS tool includes programmable touch-screen, electronics enclosure, and installation head with stepper motor and gearbox. Use to install Dual-Lokt preformed clamps.

- Bench mounted with linear slide (X-Y motion)
- Tension wheels grip clamp tail prior to tension process
- Industrial control system with programmable touch screen to set maximum and hold tension, and hold delay before cutoff
- Stores multiple clamp setups
- 2000 lbs. tension load cell
- Data recording and export



IT0750 – IT6000 TOOLS

The IT0750 - 6000 Series Tools (with air hose and regulator) are hand-held tools used for repeatable band installation in high production environments.

- Can be fixtured into production system
- Variety of head configurations that allow installation of:
 - 3/16", 1/4" and 3/8" Tie Lok
 - 1/4" Universal Clamps
 - 1/4" and 3/8" Jr. Smooth ID clamps
- Ergonomic design for ease of use by hand
- Heavy duty cut-off and tensioning components
- Durable pneumatic system
- Easy to maintain

Use with Tie-Lok ties, Universal Clamps and Junior Smooth ID Preformed Clamps.

Available Versions:

- **IT0750** For all 3/16" Mini Tie-Lok® Ties
- **IT1000** For all 1/4" Tie-Lok® Ties and 1/4" Universal Clamps
- **IT2000** For all 1/4" BAND-IT Junior® Clamps
- **IT5000** For all 3/8" BAND-IT Junior® Clamps
- **IT6000** For all 3/8" Tie-Lok® Ties

With the exception of the IT0750, the entire IT tool lineup has been updated to the C Revision Level providing increased maintenance cycle times and clamp cycles before wear part replacement, common replacement parts, and a decreased cost of ownership.

Product Manuals are available for both AB versions and C versions



IT7000 1/4" TIE-LOK® PRECISION FASTENING TOOL

New! The IT7000 is the latest tool in the IT Series designed for high production environments.

The IT7000 Tie-Lok Precision Fastening Tool can significantly increase quality and maintenance intervals; and greatly reduce variation between operators while capturing performance data with verification of tie installation to help maximize throughput.

CAPABLE stronger clamping force

VERIFIABLE clamp installation

REPEATABLE accuracy to meet takt time

DATA TRACKING ensures integrity of finished assembly

DURABLE robust independent clamping system for less wear and tear

- IT7000 TIE-LOK SYSTEM includes tool, Siemens Control System, and HMI (Human Machine Interface)
- Tool is powered by DC motor and pneumatic cylinders
- Compatible with 1/4" TIE-LOK ties
- Control System includes Siemens PLC for precision control and data collection
- HMI onboard screen to control and monitor the system to translate data to real-time information



IT8000 3/8" TIE-LOK® PRECISION FASTENING TOOL

The IT8000 Tie-Lok Tool is designed for high production environments and can significantly increase quality and maintenance intervals; and greatly reduce variation between operators while capturing performance data with verification of tie installation to help maximize throughput.

CAPABLE stronger clamping force

VERIFIABLE clamp installation

REPEATABLE accuracy to meet takt time

DATA TRACKING ensures integrity of finished assembly

DURABLE robust independent clamping system for less wear and tear

- IT8000 TIE-LOK SYSTEM includes tool, Siemens Control System, and HMI (Human Machine Interface)
- Tool is powered by DC motor and pneumatic cylinders
- Compatible with 3/8" TIE-LOK ties
- Control System includes Siemens PLC for precision control and data collection
- HMI onboard screen to control and monitor the system to translate data to real-time information



J00169: JUNIOR® CLAMP ADAPTER

BAND-IT preformed clamps must be applied with the BAND-IT® Tool C00169: Standard Banding Tool and this Jr® Adapter Accessory Tool J00199 or the J05069 Heavy Duty Jr® Adapter. Fits over tool nose. Clamp is locked under full tension and clamp tail is cut off with adapter cut-off action.

- J00587 – Shear Hook
- J93099 – Junior® Lock Universal Cutter Blade Kit



J02069: POK-IT II TOOL WITH CUTTER

Compact design and ease of use to install 3/16" – 3/8" band and buckle and BAND-IT Jr.® clamps. The ratchet design enables a quick strong tensioning for narrow band clamps.



J05069: JUNIOR® HEAVY DUTY ADAPTER

Used to install Junior® Smooth ID Preformed Clamps for hose assembly when a vice is not available. Use only with the C00169: Standard Banding Tool.

- J00587 – Shear Hook
- J93099 – Junior® Lock Universal Cutter Blade Kit



K50289: BALL-LOK TOOL

Install Ball-Lok and Ball-Lok™ stainless steel ties (up to 7.9mm wide) quickly and easily with the lightweight, portable Ball-Lok tool with adjustable tension, side loading and automatic tail cut-off.



M50389: MULTI-LOK HAND TOOL

Quickly, easily and consistently applies any size Multi-Lok ties. Simply adjust the Multi-Lok tool for the desired tension, slip the Multi-Lok in the slot or side load, and squeeze the handle. When the proper tension is reached, the Multi-Lok tool automatically cuts the tail off flush with the buckle.



S03869: CENTER PUNCH TOOL

Easy to use ratchet drive can be switched to use either the 3/8" wide or 5/8" wide slots of this pocket style tool.



S35099: PNEUMATIC JUNIOR® CLAMP AUTOMATIC AIR TOOL

For high volume production clamping of all widths and diameter sizes of BAND-IT Junior® Smooth ID and Junior® preformed clamps. Automatically tensions and cuts off clamp tail after roll-up and lock.

- Adjustable air regulators and gauges provide consistency of tool performance.
- Foot peddle allows hose assemblers increased control of clamp placement.
- Installs 5 widths of Junior and Junior smooth ID Clamps ranging from $\frac{1}{4}$ " to $\frac{3}{4}$ " in the following diameters: $\frac{13}{16}$ " to 8".

THE BAND-IT EDGE

- Ergonomic – automatically tensions
- S35099 automatically cuts off clamp tail
- Permanent Lock • High volume
- Bench Mount • Foot Pedal

TOOL FEATURES

- Can be fixtured into production system
- 100-125 psi line pressure

Use With:

- BAND-IT Jr Smooth ID Clamps
- BAND-IT Jr Preformed Clamps

Replacement Parts:

- S45799 – Band Gripper Kit
- J93099 – Junior Lock Universal Cutter Blade Kit
- S45087 – Tripper Plate



S75099: PNEUMATIC JUNIOR® CLAMP TOOL

The “Standard Air Tool”. The foot controlled standard air tool applies the complete range of BAND-IT Junior® and Junior® Smooth ID preformed clamps.

- Adjustable air regulators and gauges provide consistency of tool performance.
- Foot peddle allows hose assemblers increased control of clamp placement.
- Installs 5 widths of Junior and Junior smooth ID Clamps ranging from

TOOL FEATURES

- Ergonomic – automatically tensions
- S75099 has an easy-reach manual cutoff handle
- Permanent Lock • High volume
- Bench Mount • Foot Pedal

THE BAND-IT EDGE

- Can be fixtured into production system
- 100-125 psi line pressure

Replacement Parts:

- S45799 – Band Gripper Kit
- J93099 – Junior Lock Universal Cutter Blade Kit
- J00587 – Shear Hook
- S45087 – Tripper Plate



SM1700: PNEUMATIC CENTER PUNCH CLAMP AUTOMATIC AIR TOOL

Designed to install BAND-IT® Center Punch 5/8" wide preformed clamps, made from 201 Stainless Steel and Galvanized Carbon Steel. Automatically tensions and cuts off clamp tail.

Use with: BAND-IT® Center Punch Preformed Clamps

Replacement Parts:

- S45199 – CP Band Gripper Kit
- M17799 – CP Cutter Blade Kit
- S45087 – Tripper Plate



T30069: CENTER PUNCH TOOL

Used to apply BAND-IT® 3/8" and 5/8" Center Punch Clamps, 201 Stainless Steel Band and Galvanized Carbon Steel Clamps.

- T28088 – Head Assembly
- T32190 – Punch Kit
- T32290 – Gripper Kit



TL3800: TIE-LOK TOOL®

Specifically designed to install 3/8" wide Tie-Lok® stainless steel ties. Repeatable, controlled tie tension. Punch depth limiter. Light weight, compact design. Cut off produces clean hidden edges.



UL4000-D: ULTRA-LOK® CORDLESS TOOL

Ideal for mobile installations. Now powered with a Lithium-ion battery, with longer charge and battery life, the UL4000-D battery charge lasts longer with consistent peak performance through the life of the battery. Use with Ultra-Lok Band & Preformed Clamps.

- M09387 – Shear Plate for Installing 1/2" Wide UL Clamps
- M09887 – Shear Plate for Installing 3/4" Wide UL Clamps
- M09787 – Cutter Blade for Installing All UL Clamps
- C23187 – Lubricant for Tension Threads
- UL1219 – Handle Kit



X80304: SIGNODE PNEUMATIC COMBINATION TOOL

Tensions, seals, and cuts 1 1/4" (31.8mm) bands and seals.

Signode has made changes to the X80304 and we are currently validating the new tool meets our specifications and standards. Please contact your BAND-IT representative for more information.



X80305: SIGNODE PNEUMATIC SEALER

Crimps seal. Use with X80306 tool to tension and crimp 1 1/4" (44.45mm) Flat Seal BAND-FAST.



X80306: SIGNODE PNEUMATIC TENSIONER

Tensions band. Use with X80305 tool to tension and crimp 1 1/4" (44.45) Flat Seal BAND-FAST.



XE4809: FROMM PNEUMATIC COMBINATION TOOL

Tensions, seals, and cuts 3/4" (19mm) bands and seals.



XE9229: TENSIONING TOOL

Tensions and cuts off Ball-Lok, Ball-Lokt™ and Multi-Lok ties up to 12mm wide. Use regardless of material or coating.

(Listed as Part Number KE922 outside the United States)

Use with:

- Ball-Lok Ties
- Ball-Lokt Ties
- Multi-Lok Ties



BAND-IT®

ENGINEERED FASTENING SOLUTIONS

More Clamps

More Markets

More Solutions!

Aerospace
Automotive
Cable TV
Cable Management
Coal Power
Construction
Electrical
Government
Hose
Insulation
Offshore
Oil & Gas
Marine
Military
Municipal
Petrochemical
Power Plants
Refineries
Ship Building
Subsea
Telecommunications
Traffic
Utility



IDEX

Copyright BAND-IT®

A Unit of IDEX Corporation

Denver, Colorado U.S.A.

Product Solutions Guide 2018. All rights reserved.